


Generator set  
Sound-proof type  
**DT200P5S-AU**

# SPECIFICATIONS



# DTP-AU series DT200P5S-AU

50 Hz @ 1500rpm,3-phase/4-wiring

# Potise

## 1 Standards & Conditions

### Design Standards

The designs and the productions are in conformity with:

- Conformance Européenne (CE)
- ISO8528-5:2005
- AS 3000-2018
- AS 3010-2017

### Environmental Operating Conditions

- Installation place: Outdoors or indoors (well ventilated).
- Ambient temperature: -25°C to 50°C. The coolant heater is needed when the temperature is below 5°C
- Humidity: Less than 90%.
- Altitude: Below one thousand (1000) meters above sea level.

### Factory Inspection

- Inspection items.
- Protection devices working test.
- Starting ability in normal temperature.
- 50% rated power load moment capability.
- Voltage deviation and speed variation: 0%, 25%, 50%, 75%, 100%, 110% Load.

### Painting Process

- Painting process specifications and colors are based on the manufacturer's standard.
- The customer could also choose the color which the manufacturer offers.


## 2 General Features

- PowerLink engine 6D9.7TAG1
- Close coupled to PowerLink alternator PL3F
- Microprocessor control module PLC-920
- Main circuit breaker: 320A
- Rotate speed governor: Electric fuel control
- Excitation system: Self excited, SHUNT
- A.V.R model: SX440
- Key switch
- Emergency stop switch
- ATS (automatic transfer switch) receptacle

- Remote run connector
- 2x12V/120AH sealed for life maintenance free battery
- Lockable battery isolator switch
- Powder coated canopy
- 50°C radiator
- Steel base frame
- Vibration isolators between the engine/alternator and base frame
- Dry type air filter
- Base fuel tank for 22 hours running
- Drain points for fuel tank
- Operation Manual / Specifications

## 3 Equipment


### General technical data

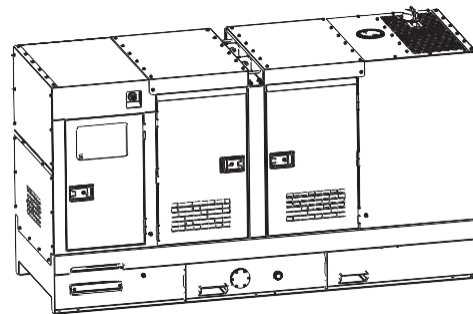

Model ..... DT200P5S-AU  
Tank capacity ..... 920L  
Dry weight ..... 3683kg  
Sound pressure level @ 7m ..... 71.3dBA  
Dimensions LxWxH. .... 3852x1450x2283mm  
Standby Power ..... 220kVA/176kW  
Prime Power ..... 200kVA/160kW


Voltage	380V	400V	415V		
Ampere	303.9A	288.7A	278.2A		
Genset Fuel Consumption					
Frequency/Load	25%	50%	75%	100%	110%
50Hz (L/h)	13	24	34	46	51

**3RZHU 6\WHP**

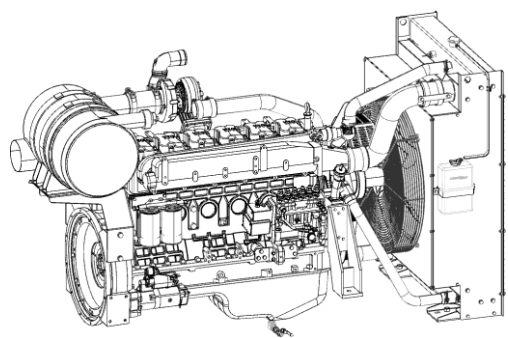


Engine Manufacturer/Brand .....	Powerlink
Engine Model.....	6D9.7TAG1
Dimensions LxWxH. ....	1796×767×1275mm
Dry Weigh (approx.) .....	1000kg
Number of Cylinders. ....	6
Bore .....	120mm
Stroke.....	130mm
Displacement. ....	9.726L
Compression Ratio .....	17.0
Type of injection.....	Direct injection
Intake System. ....	Turbocharged and charge air cooled
Intake Resistance .....	≤ 5kPa
Cooling System.....	Water cooled
Fan .....	Pusher
Battery Voltage .....	V
Type of Fuel.....	No.2 or ASTM D975
Type of Oil .....	API CF/SE or CCMCF4
Oil Capacity .....	23.0L
Type of Coolant.....	Glycol mixture
Coolant Capacity .....	21.0L
Back Pressure .....	≤ 10.1kPa
Standby Power.....	205kW
Prime Power.....	186kW

**Alternator**

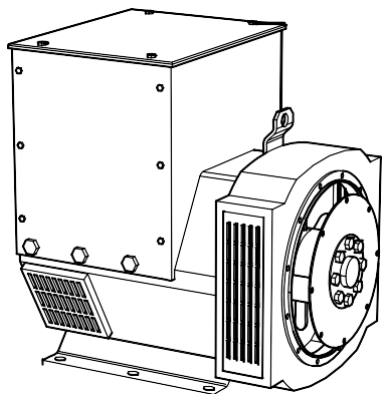

Alternator Manufacturer/Brand.....	PowerLink
Alternator Model.....	PL3F
Exciter .....	Brushless
Cooling Fan.....	Cast alloy aluminum
Windings .....	100% copper
Insulation Class.....	H
Winding Pitch .....	2/3
Terminals.....	12
Drip Proof.....	P23
Altitude .....	≤1000m
Overspeed .....	2250rpm
Air Flow .....	N/A
Voltage Regulation .....	±1.0%
Total Harmonic TGH / THCat no load < 1.5 % - on load < 5%	
Telephone Interference.....	THF<2%;TIF<50

**PLC-920 Control System**

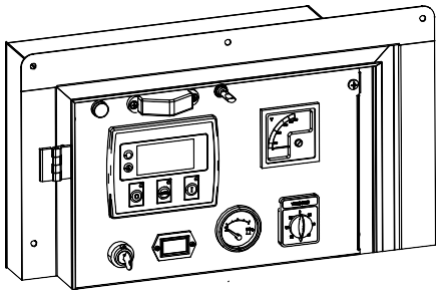


PLC-920 is an advanced control module based on microprocessor designed to control the engine via push buttons on the front panel. The module is used to start and stop the engine and indicate fault conditions, automatically shutting down the engine and giving a true first fault condition of an engine failure.


**Standard Control Function**

- Manual Engine Control Module
- Low Oil Pressure
- High Engine Temperature
- Auxiliary Shutdown
- Overspeed Protection
- Protection hold-off timer
- Charge Failure warning

#### 4 Overall Dimensions

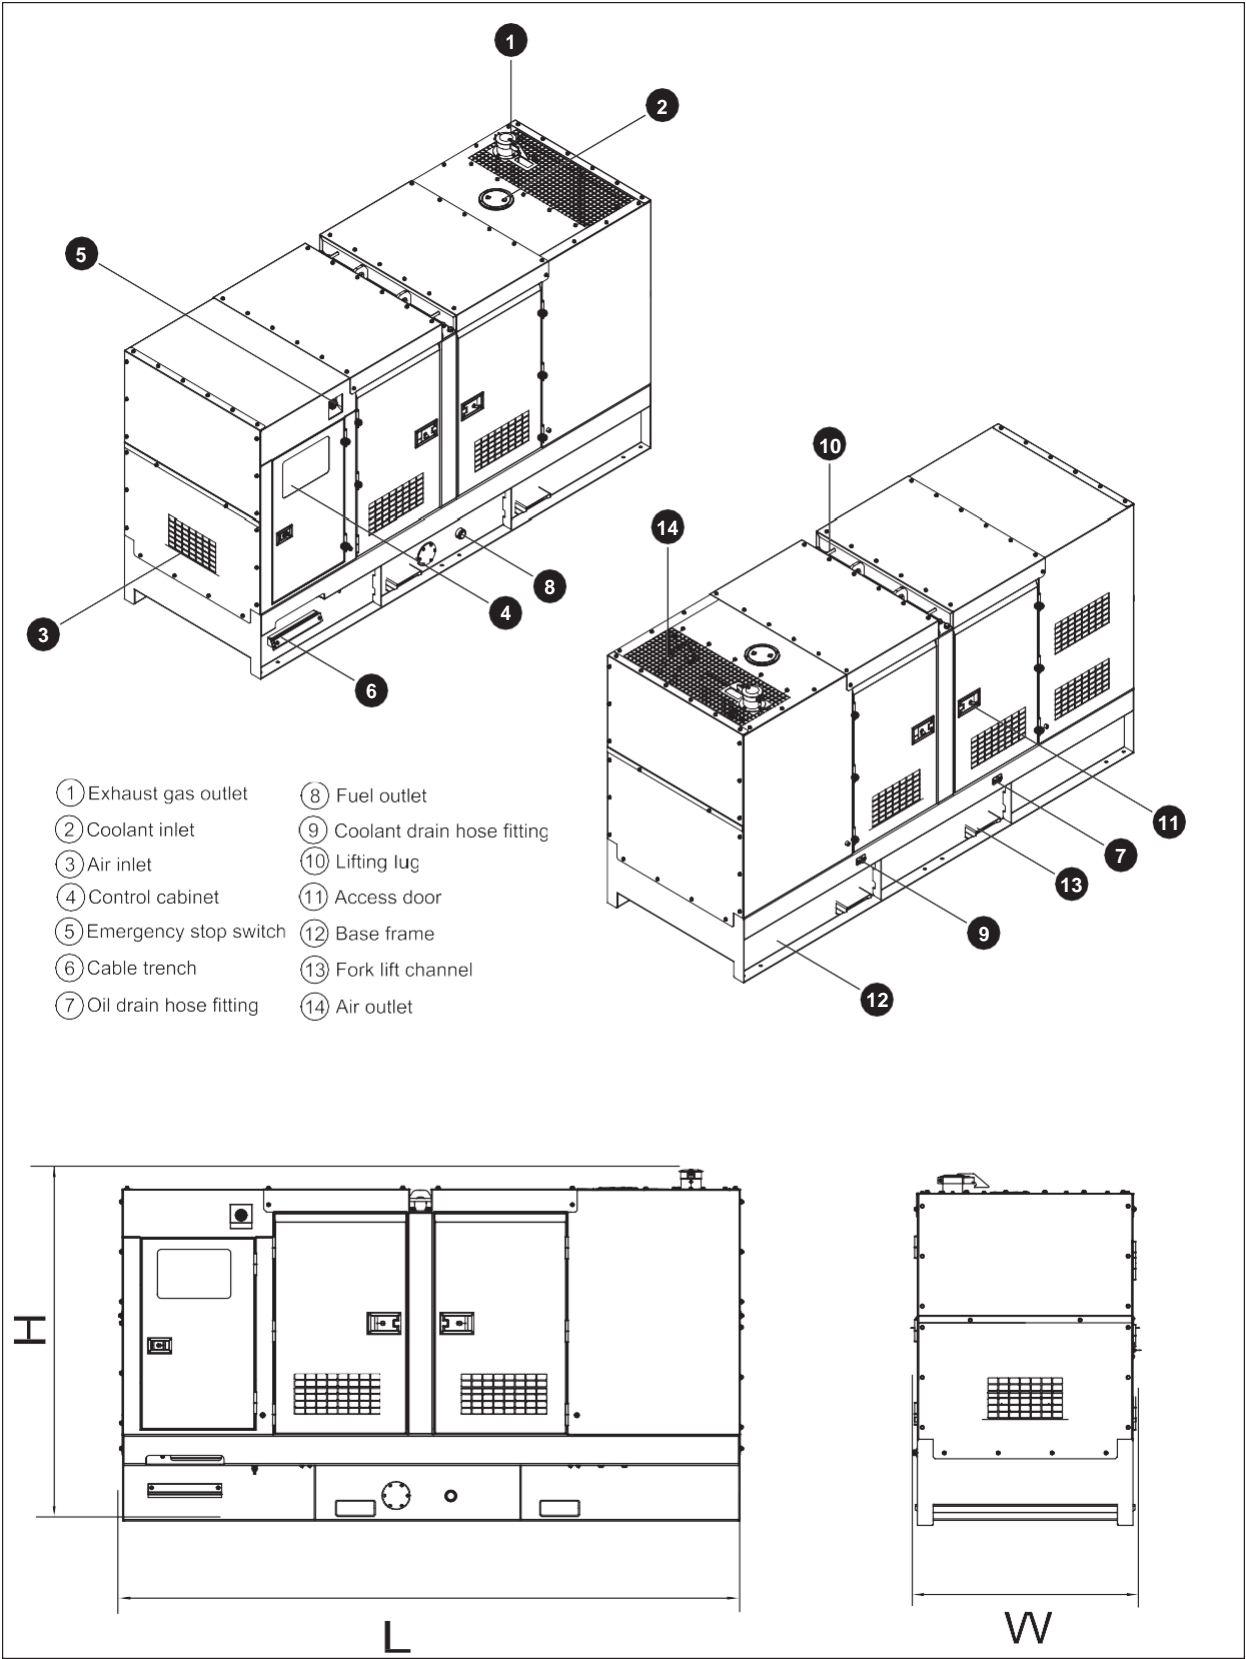


## 5 Control System

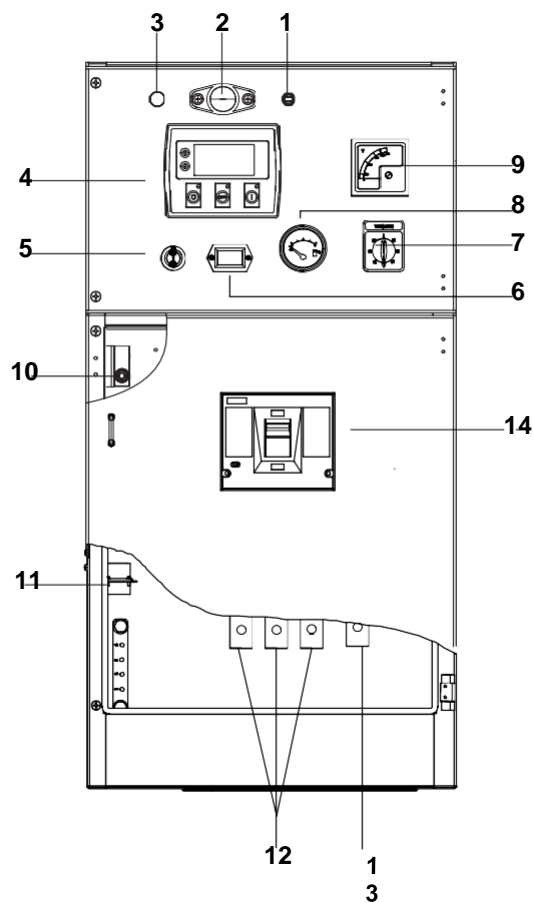

Control & field wiring cabinet

1	Control cabinet lamp switch
2	Control cabinet lamp
3	Charge indicator
4	Control module
5	Key switch
6	Time counter
7	Voltage changer-over switch
8	Fuel level meter
9	Voltage meter
10	Limit switch
11	Mains input/Remote control/ATS connector
12	Live wire terminal
13	Neutral wire terminal
14	Main circuit breaker

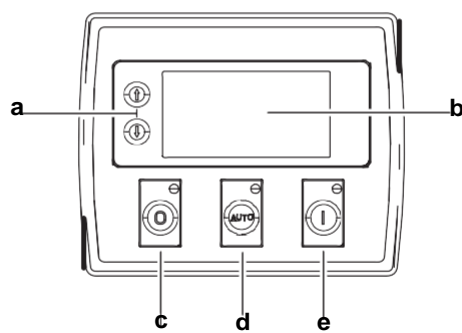

Control module

Ref.	Description
a	Navigation button£» Accept (Configuration mode only)
b	Main status display
c	Stop/reset button£» Next page (Configuration mode only)
d	Auto start button£» Decrease value/next item (Configuration mode only)
e	Start button£» Increase value/next item (Configuration mode only)

1000033906-A2-E
10.2020