


EXIT AIR TEMPERATURE : 27°C
HUMIDITY: 90%
AIR FLOW RATE: 105 m³/h
RECOVERY PER HOUR: 4,85 kWh
 (VALUES CALCULATED ON THE BASE OF THE SHORTEST CYCLE)

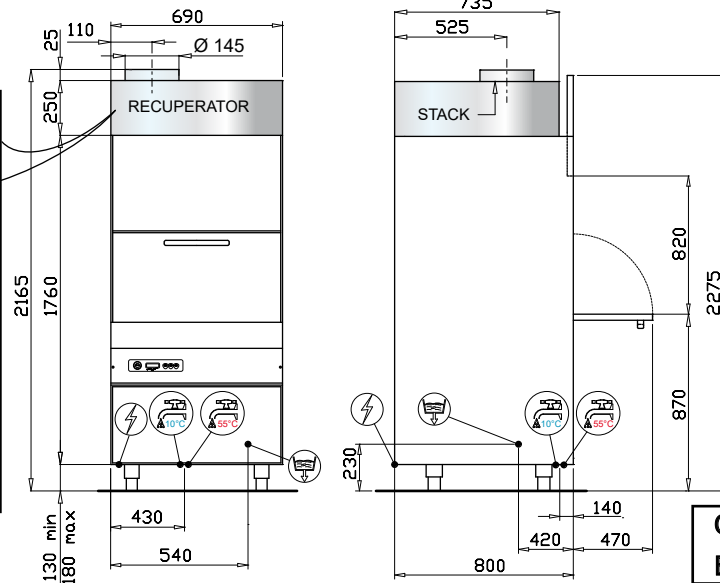

	HOT WATER CONNECTION 3/4" GAS MAX 55°C
	COLD WATER CONNECTION 3/4" GAS 10°C
	DRAIN PIPE Ø 32mm
	ELECTRICAL SUPPLY

ONLY PLUS VERSION, NEVER BUILT-IN WATER SOFTNER VERSION

TECHNICAL DATA					
EXTERNAL DIMENSIONS					
width	690 mm				
depth	800 mm				
height	2165/2275(door open) mm				
WEIGHT(basic version)	165 kg				
VOLTAGE	400V 3N 50Hz				
POWER REQUIRED	8180 W				
WATER HARDNESS	< 8 °F				
WATER CONDUCTIVITY	> 200 µS/cm				
INLET WATER PRESSURE	200-400 kPa				
CROCKERY DIMENSIONS					
size allowed	805 mm				
RACK DIMENSIONS	550X665 mm				
RACK EQUIPMENT	1XC86/A - 1XC87/B - 1XC97/A - 1XC100				
WASHING CYCLES (sec)	1 (180)	2 (300)	3 (420)	4 (540)	5 (660)
WATER SUPPLY 55°C					
racks/h(*) ⁽¹⁾	--	--	--	--	--
WATER SUPPLY 10°C					
racks/h(*) ⁽¹⁾	13	12	8	6,5	5,5
WATER CONSUMPTION / CYCLE	4,2 l				
BOILER CAPACITY	15 l				
BOILER HEATING ELEMENT	6000 W				
RINSING TEMPERATURE (SET)	85°C				
TANK CAPACITY	50 l				
TANK HEATING ELEMENT	3000 W				
TANK TEMPERATURE (SET)	60°C				
WASHING PUMP POWER	2180 W (810 l/min ^{***})				
RINSING PUMP POWER	250 W (150 l/min ^{***})				
DRAIN PUMP (optional)	190 W (120 l/min ^{***})				
ACOUSTIC PRESSURE	63.8 dB(A)				

(*) STANDARD THERMOSTOP (CAN NOT BE DISABLED)

(***) MAXIMUM FLOW RATE

- **STANDARD ENERGY SAVING** (CAN NOT BE DISABLED)

(¹) In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.