

XP

Economy Passthrough Dishwasher - 500mm Rack

W 705mm x D 765mm x H 1520mm

A full size machine with huge 430mm door clearance, for washing very large plates, serving dishes and bowls in 500mm dishracks.

Standard Features

- 2.6 litres per cycle hot water consumption
- Up to 1000 plates per hour
- 1, 2 and 3 minute wash cycles
- Classic electromechanical controls
- Double filtration system
- Dual chemical injectors
- Upper and lower wash & rinse arms with precision moulded jets
- Recirculates wash water at nominal 350 litres per minute
- 2.5kW wash and 3/6 kW rinse heating (3 phase required for 6kW)
- 430mm high wash chamber clearance
- Suits 500mm international standard racks
- Autostart on hood closure
- Anti-drip door edge channels water away from operator
- Stainless steel construction
- Easy clean L-shaped tank with curved corners
- Easy install
 - Water supply hose
 - Dual chemical injector lines
 - 15 amp plugset
- Corner or in-line installation
- No commissioning required
- Watermark certified
- Optional on site 3 phase version

Includes:

- 1 x 6007028 - 500mm dish rack
- 1 x 6007029 - 500mm cup rack
- 1 x C660503 - cutlery container



The unit shall be a Watermark certified Washtech passthrough dishwasher, suitable for in-line or corner installation. The unit shall be fitted with automatic fill and low level pump and element protection and automatically start on door closure an operator selectable one, two or three minute complete operating cycle. Door clearance shall be 430mm. The unit shall be fitted with rotating upper and lower wash and rinse arms, detergent injector and rinse fluid injector. Hot water consumption shall be 2.6 litres per operating cycle. The unit shall require 15amp single phase electrical supply and be suitable also for 3 phase connection if required. The unit shall be supplied with 500mm all plastic cup and dishracks and shipped in 100% recyclable packaging. Height of machine shown includes height with maximum 60mm adjustable leg extension.



XP

Economy Passthrough Dishwasher - 500mm Rack



Australia
www.moffat.com.au

Australia
Moffat Pty Limited


Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

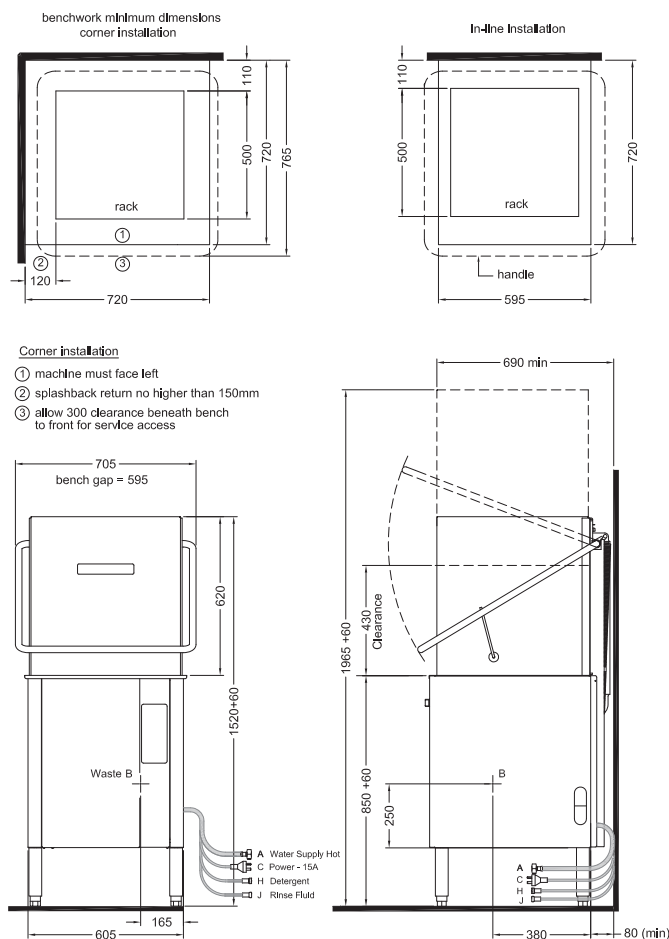

- Corner installation**
- ① machine must face left
 - ② splashback return no higher than 150mm
 - ③ allow 300 clearance beneath bench to front for service access

A Hot Water		Dimensions	
temperature	65°C	Width	705mm
connection	3/4	Depth	765mm
pressure	200-350kPa	Height	1520mm
flow	20 litres per min	Weight	94kg
quality	potable & soft	Packed Dimensions	
B Waste		Width	760mm
connection	1.5 BSP	Depth	830mm
line	2" BSP	Height	1450mm
C Electrical		Weight	125kg
single phase 240V 50Hz	15 amp plugset supplied	Cubicmetres	0.91m ³
OR 3 phase 415V 50Hz	15 amp		

Refer operator manual for complete installation instructions

