

# Metal Detector **AD-4971** Series

IP65

Capable of detecting metal contaminants in products, this system contributes to the delivery of safe products to customers.



*Provides high sensitivity detection with simple and easy operation and contributes to the delivery of safe products to your customers.*



### High sensitivity detection

You can conduct high sensitivity detection with simple and easy operation. The optimal sensitivity setting can be set through the auto sensitivity settings. The phase tracking function enables minimization of product phase and allows constant high sensitivity inspection.

### 7 inch color touch panel

The display utilises a high visibility touch panel color LCD with user friendly Graphic User Interface (audio guidance support function included).

### Image import from USB

Product images can be quickly uploaded to the metal detector from USB memory, making product identification and upload fast and simple.



USB memory  
(sold separately)

### Stores up to 1000 products


Products can be divided into 10 different groups, with up to 100 products able to be recorded within each group.




### IP65

Protected from dust and water to IP65 standards. Hygienic design with the entire system washable.

## Display examples

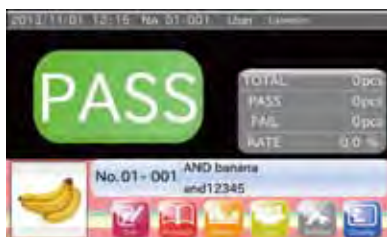

Normal display

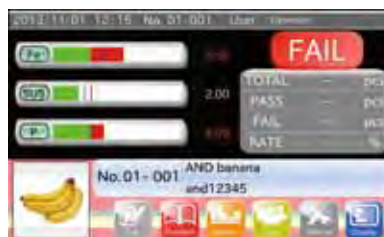

Bar graph display



Lissajous display

### Modbus® communication

Equipped with Modbus RTU/Modbus TCP as standard. With Modbus communication, seamless connection can be easily achieved.

Operations such as stopping and starting inspection, collecting data and changing product can all be set from an external device.



LCD screen



Touch panel PC

### Ethernet



AD-4971 Metal Detector



AD-4961 Checkweigher



## ■ Operation history

The history of configuration changes can be recorded and displayed.  
Suitable for use in HACCP programs along with the inspection history function.

Users can be registered and their scope of permitted operations controlled according to 4 management levels.

**Operator**

**Supervisor**

**Quality Manager**

**Administrator**

By assigning each user to the appropriate level of access, inadvertent operations can be avoided. \*

\* "Operator" is set as the factory default setting.

Time	User	No.	Item
2013/10/20 12:18:32	Admin	1-001	Login
2013/10/20 12:18:30	Admin	1-001	Language
2013/10/20 12:14:43	Admin	1-001	Language
2013/10/20 16:21:29	Admin	1-001	FAIL, cou
2013/10/20 16:21:31	Admin	1-001	FAIL, cou
2013/10/20 16:21:33	Admin	1-001	FAIL, cou
2013/10/20 17:30:30	Admin	1-001	Login
2013/10/20 17:30:30	Admin	1-001	Login
2013/10/20 17:40:16	Admin	1-002	Search
2013/10/20 17:41:21	Admin	1-002	Filter

## ■ Inspection history

Inspection results, such as date, time, product codes and inspection results, can be recorded to USB memory during inspection.

Inspection history  
output example

2013/07/31	12:30:00	01-001	PASS
2013/07/31	12:30:05	01-001	PASS
2013/07/31	12:30:10	01-001	PASS
2013/07/31	12:30:15	01-001	PASS
2013/07/31	12:30:20	01-001	FAIL 1
2013/07/31	12:30:25	01-001	PASS
2013/07/31	12:30:30	01-001	FAIL 2
2013/07/31	12:30:35	01-001	PASS
2013/07/31	12:30:40	01-001	PASS
2013/07/31	12:30:45	01-001	PASS
2013/07/31	12:30:50	01-001	FAIL 1

Date Time Code Detection result



All inspection data (csv), operation history (csv), inspection summary data (PDF) and operation check results (PDF) can be outputted to USB memory.

\*USB memory is not included. Please prepare separately.




Inspection results and operation check results can be outputted to a PostScript printer via Ethernet.

## Basic principle of metal detection

A sensor head of an electromagnetic induction type metal detector consists of a transmitter coil and two receiver coils that are equally spaced and are differentially connected. A transmitter coil broadcasts a radio frequency signal and generates an electromagnetic field between the transmitter coil and the receiver coils. When no contaminant exists, both receiver coils receive an equal amount of magnetic flux and differential signal output is balanced at zero.

The magnetic flux balance is disturbed and creates a differential output signal when a contaminant passes through the aperture.

Metal detectors detect metal contaminants by processing this differential output signal.

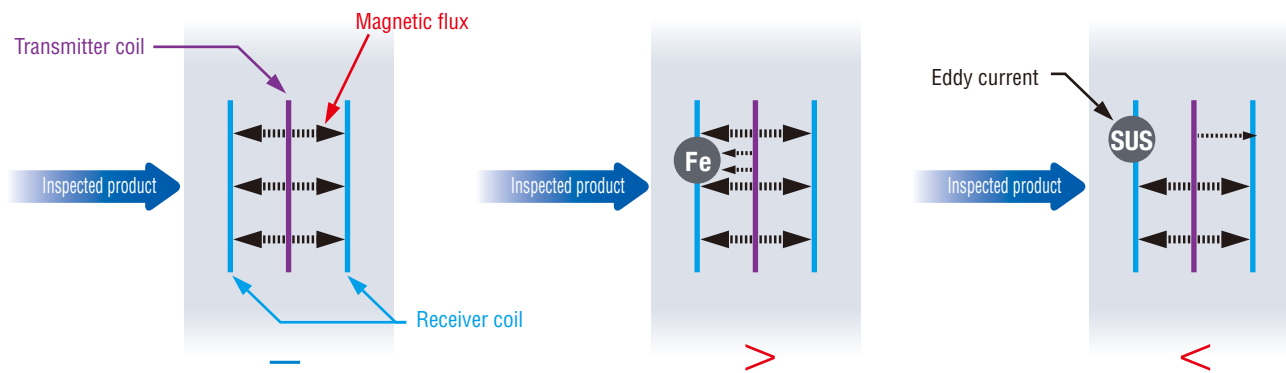

Magnetic flux balance in a steady state

Magnetic flux balance with a magnetic metal

Magnetic flux balance with a non-magnetic metal



## Common Specifications for AD-4971 Series

Conveyor belt width	250mm ( AD-4971-3510/3517/3525 ) 350mm ( AD-4971-4517/4525 )
Conveyor length	800mm
Transport medium	Urethane belt
Conveyor belt speed	10~60m/min
Display	7inch touch panel color display
Operation method	Touch panel (WVGA), Key switch
Number of recorded items	1000
Communication functions	Modbus TCP / Modbus RTU / TCP/IP(PostScript printer)/ USB (for USB memory, data storage, image import use)
External input	Non-voltage contact input 4 points
External output	Relay output 8 points
Dust/water resistance specifications	IP65 compliant
Operation temperature/humidity range	0~40°C / Humidity below 85%(with no condensation)
Power supply	Single phase AC100V~240V(+10%, -15%), 50/60Hz, 100VA
Material	Sensor head: Stainless Steel Display: ABS resin Conveyor unit: Phenolic resin, stainless steel, aluminum (alumite treatment) Control box: ABS resin Base unit: Stainless steel

## Operating precautions

- Decide where in the production process to install the metal detector by assessing the risk of metal contamination.
  - For raw materials with a lot of metal contaminants, install a metal detector before processing begins.
  - For products packed in aluminum foil packages, install a metal detector before the packaging process.
  - For frozen products, install a metal detector after freezing. (make sure the product is frozen to the core and is below -18 degrees celcius.)
- Production flow of horizontally long or oblique orientation is preferable.
- Keep inspected products as small as possible.
- Keep product temperature constant.
- Installing the metal detector in an area with little vibration is advised.
- Dedicated 100-240V wiring with low noise is advised.
- Make sure to ground the metal detector.
- Remove vibrating or shifting metals near the sensor head.
- Make sure that ground loops are not created by nearby equipment.
- Please prepare a  $\phi 4$ -7mm power cable.


### Accessories

#### AD4971-02

**Tower light**  
IP53 dust and water  
resistance levels



## AD-4971 Series Specifications

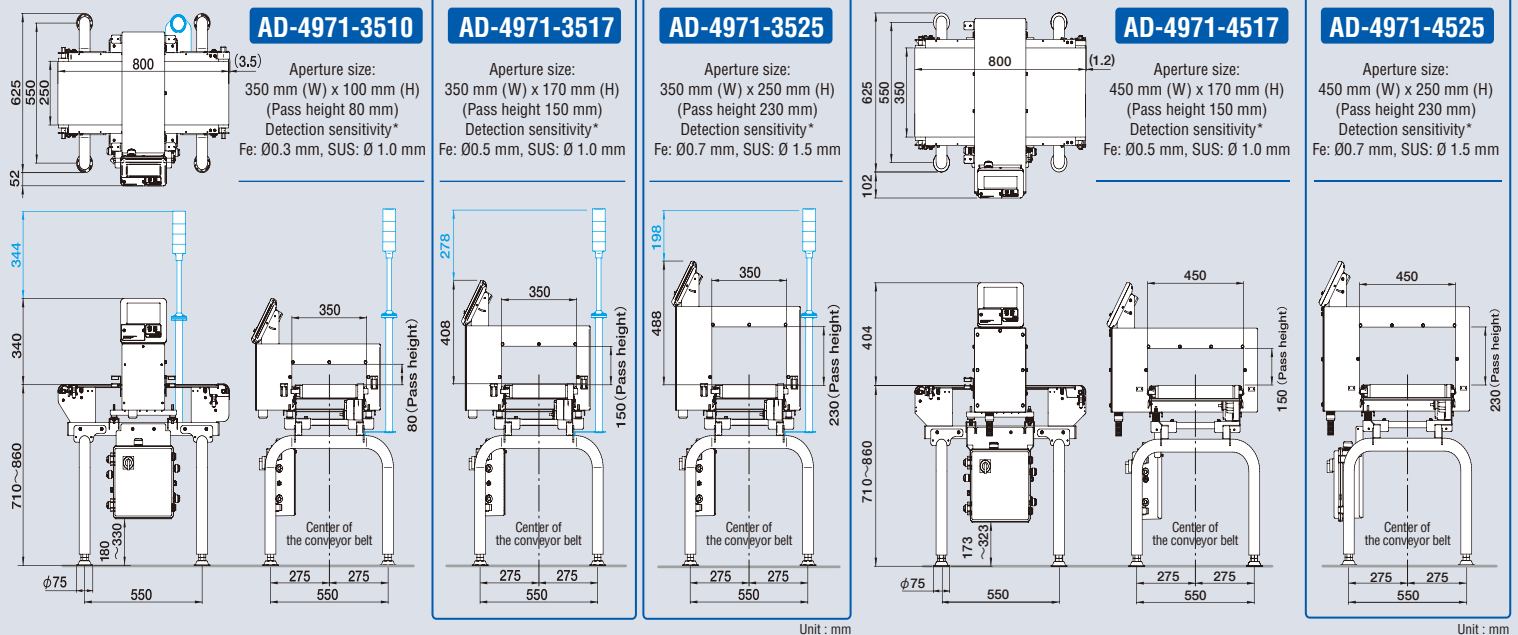

\*Optional tower lights are illustrated in blue.

\* Detection sensitivity will change depending on product and environmental conditions.  
Please prepare a  $\phi 4$ -7mm power cable.



...Clearly a Better Value

### A&D Company, Limited

3-23-14 Higashi-Ikebukuro, Toshima-ku, Tokyo 170-0013 JAPAN  
Telephone: [81](3) 5391-6132 Fax: [81](3) 5391-6148  
http://www.aandd.jp

### A&D ENGINEERING, INC.

1756 Automation Parkway, San Jose, CA 95131 U.S.A.  
Telephone: [1](408) 263-5333 Fax: [1](408) 263-0119

### A&D Australasia Pty Ltd.

32 Dew Street, Thebarton, South Australia 5031 AUSTRALIA  
Telephone: [61](8) 8301-8100 Fax: [61](8) 8352-7409

### A&D INSTRUMENTS LTD.

Unit 24/26 Blacklands Way Abingdon Business Park,  
Abingdon, Oxon OX14 1DY UNITED KINGDOM  
Telephone: [44](1235) 550420 Fax: [44](1235) 550485

### <German Sales Office>

Hamburger StraÙe 30 D-22926 Ahrensburg GERMANY  
Telephone: [49](0) 4102 459230 Fax: [49](0) 4102 459231

### A&D KOREA Limited

817, Manhattan Bldg., 33, Gukjegeumyung-ro 6-gil,  
Yeongdeungpo-gu, Seoul, 150-749, KOREA  
Telephone: [82](2) 780-4101 Fax: [82](2) 782-4280

### A&D RUS CO., LTD.

Vereyskaya str.17, Moscow, 121357 RUSSIA  
Telephone: [7] (495) 937-33-44 Fax: [7] (495) 937-55-66

### A&D Instruments India Private Limited

509 Udyog Vihar Phase V  
Gurgaon-122 016, Haryana, INDIA  
Telephone: [91](124) 471-5555 Fax: [91](124) 471-5599