


APPLICATIONS

- KIOSK/POS machines
- Transportation machines
- Ticketing machines
- Financial ATMs
- Entertainment/Gaming machines
- HMI equipment controller monitors
- Public communication machines
- Public advertisement machines

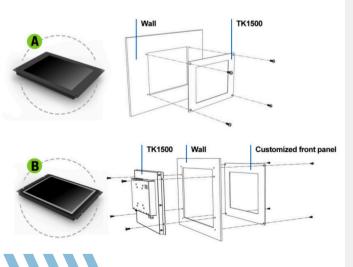

15" Industrial Touch Monitor (TK1500NP/C/T)

KEY FEATURES

- 15" LED display with 1024×768 resolution.
- 5-wire resistive touch panel for precise interaction.
- High contrast (1500:1) and brightness (300cd/m²) for clear visuals.
- Wide viewing angle of 170°/170°.
- Multiple inputs: HDMI, VGA, DVI, and A/V for versatile connectivity.
- Metal housing with integrated bracket for easy installation.







• Brightness: 300cd/m², Contrast: 1500:1.

• Aspect Ratio: 4:3.

Power: DC 12V, ≤15W consumption.

• Operating Temp: -20°C to 60°C

• Storage Temp: -30°C to 70°C.

 Dimensions: 402×289×45.5mm (with bezel); 400×279×43.5mm (open frame).

- Weight: 3.2kg (with touch panel), 2.8kg (without touch panel).
- Accessories: HDMI, VGA, and audio/video cables, 12V DC adapter, optional DVI cable, USB cable for touch, touch pen, and drive disk.

15" Industrial Touch Monitor (TK1500NP/C/T)

KEY FEATURES

- Bezel-less, slim design for sleek integration into embedded systems or kiosks.
- Customizable front panel options available for different industrial needs.
- Low power consumption of ≤15W for energy efficiency.
- Anti-glare and antifingerprint screen to maintain clarity in high-traffic or public environments.









