



# **COTTON PRO**

# A RELIABLE WORK HORSE

The characteristics of Dieci products can be summarised in three concepts that have always been the hallmark of each machine: **technology**, **reliability** and **durability**.

We work every day to evolve our machines, adopting the best solutions based on research, advice and customer experience. Offering a range of telehandlers designed to suit Australia's diverse agricultural environments.

The **Cotton Pro** is a top-quality telehandler, categorised by its load capacity. Ideal for work environments where there is a need to handle large volumes and reduce work cycles. Maintenance is straightforward, with durable components and materials designed to last.

Precision movements, manoeuvrability, maximum power at the wheels and boom, sound proofing, as well as the intelligently designed control layout, makes the Cotton Pro simple, intuitive and comfortable to use.

The Cotton Pro can be fitted with a full range of accessories, making it an incredibly versatile machine.

# **ABSOLUTE COMFORT:**

# MADE IN ITALY, DESIGNED FOR AUSTRALIA

Dieci telehandlers have always been a combination of **comfort** and **functionality** which makes us stand out all over the world.

## 4-in-I Joystick

The boom can be fully operated by the hydraulic control distributor-single joystick with proportional and simultaneous controls which also incorporates FNR, for easier and more practical direction control.

## Advanced Cooling

Equipped with a cooling system package tailored for the Australian cotton industry, which includes a large oil cooler with a reversible cooling fan and an extra-large open-core engine radiator.

## Easy Ride System

Developed by Dieci, the sophisticated air suspension system installed on the boom (optional), drastically reduces vibration when travelling over rough terrain.

## **Hydrostatic Transmission**

Complete with a servo controlled 2 speed gear box and constantly varying hydrostatic drive, which guarantees top-end speed and low-end torque.

#### Maximum Safety

The ROPS-FOPS approved cab is designed with a safety cell to provide maximum safety to the operator at all times. Dieci telehandlers comply with AS1418.19 / 10896.1.

Deadman sensor, combined with the operator presence sensor in the seat, prevents accidental operation.

The **Load Limiter Device** analyses vehicle stability in real time and inhibits any aggravating movements when the pre-set safety limits are reached.











Cotton Pro 70.10

9.50m Max Reach 7,000kg
Max Capacity

I25hp / 93kW

# Single Compensation Cylinder

Patented by Dieci - is located inside the lifting ram, ensures that the load on the boom is balanced at all times, thereby improving durability.

# Advanced Telescopic Boom

Reinforced boom is made of high resistance steel with load sensing and flow sharing Distributors that offer simultaneous movements for more efficient work.

# Attachment Holding Plate

Counter-lever articulation for a greater tilting angle.

# Perfect Climate

Equipped with an integrated electric driver's window, standard heater and a semi-automatic air conditioning system with six outlet vents, this setup allows perfect air circulation inside the cabin for maximum operator comfort.



## Panoramic Views

The large, curved windows of the cab offer a complete 360° outside view with uninterrupted visibility.

# Side Shift Carriage

Equipped with a side shift carriage, making repositioning and stacking loads tightly, an effortless task.

## Reversible Fan

The engine cooling system utilises a reversible fan to blow any dust and fibres away from the radiator.

# Inching Pedal

An essential control that allows travel speed to momentarily slow down or come to a stop while still offering maximum power to boom functions to increase precision and productivity for delicate operations.

## Comfort & Ease of Access

Spacious cab designed for operator comfort and ergonomics, adjustable steering wheel (height and depth), air suspension seat and storage compartments.

# **TECHNICAL DATA**

#### PERFORMANCE Maximum capacity 7,000 kg 9.50 m Maximum lifting height Maximum horizontal extension 5.40 m Fork swiveling angle 134° Pull-out force 5,700 daN 7,300 daN Towing force 40 % Maximum climb angle Unladen weight 12,100 kg Maximum speed 40 km/h

### **ENGINE**

Brand FPT

Nominal power 125 hp / 93 kW (@ 2,200 rpm)

Operation 4-stroke / diesel
Injection Mechanical direct
Number and arrangement of cylinders
Displacement 4,485 cm³
Emission standard Stage IIIA/Tier 3

Cooling Liquid

Intake Turbocharger after-cooler

#### **TRANSMISSION**

Type Hydrostatic transmission with variable displacement pump
Hydraulic motor Hydrostatic with continuous automatic adjustment

Reversal Electro-hydraulic

Inching control With hydraulic pedal for controlled forward movement

Gearbox Servo-controlled 2-speed

#### **HYDRAULIC SYSTEM**

Hydraulic pump type Gear pump for power steering and movements

Hydraulic pump capacity 130 l/min

Maximum operating pressure 26 MPa (3,771 psi)

Boom hydraulic sockets With quick couplings

Distributor control 4-in-1 joystick with integrated FNR (with deadman capacitive sensor)

Distributor type Hydraulic distributor-single joystick with proportional and simultaneous controls

#### **TANK CAPACITIES**

Hydraulic tank 160 l Diesel tank 125 l

## **DIFFERENTIAL AXLES**

Steering axles 2 steering, with 4 epicyclodial reduction gears

Type of steering 4 wheels / transversal / 2 wheels

Service brake Oil bath with servo brake on front and rear with double hydraulic system


Park brake Negative actuation with electrical control


#### **TYRES**

Size 18x22.5"

# **COTTON PRO 70.10**

DIMENSIONS	
A	420 mm
В	1,646 mm
C	2,950 mm
D	1,425 mm
F	4,955 mm
G	6,021 mm
Н	2,490 mm
1	940 mm
L	1,920 mm
M	2,380 mm
0	4,730 mm
P	1,700 mm
Q	4,400 mm

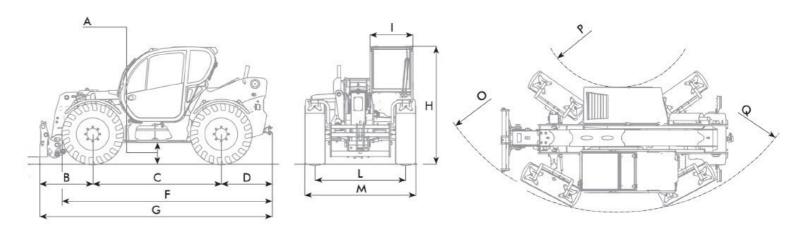

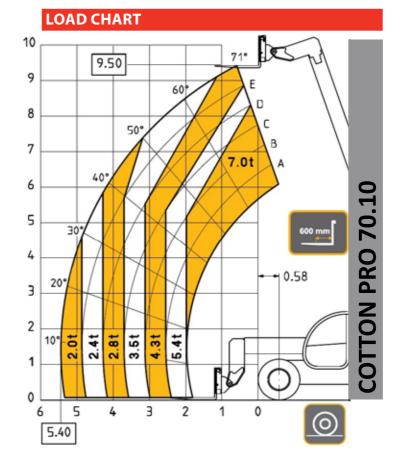

# SPECIAL FEATURES

Belly plates
Alternator sock
Full exhaust wrap
Turbo blanket

Increased capacity for oil cooler

Spark arrestor

Extra large open core radiator (5.5 fins/in<sup>2</sup>)

Hydraulic reversible fan

Window tint

Bonnet scoop

Canvas seat cover

Bluetooth radio and aerial

Air suspension seat



#### **NEW SOUTH WALES**

Sydney Branch 1/5 Melito Court, Prestons, NSW 2170

#### **WESTERN AUSTRALIA**

Perth Branch 32 Allott Way, Maddington, WA 6109

#### **VICTORIA**

Melbourne Branch 169 Studley Court, Derrimut, VIC 3026

#### **QUEENSLAND**

Brisbane Branch
1/7 Australand Drive,
Berrinba, QLD 4117

Brisbane North Branch 69 Griffin Crescent, Brendale, QLD 4500



www.dieciaustralia.com.au | ph: 1300 888 479 | sales@dieciaustralia.com.au

Distributed by Dieci Australia

Illustrations and photos show the standard international models and may or may not include optional equipment, accessories, customer installed or modified parts, optional parts and all standard equipment with some differences in colour and features. Machine specifications are subject to change without notice and additional load charts and machine or attachment specifications may be available on request. Please refer to the user and maintenance manuals located on Dieci Australia's website for correct machine and attachment operation.