

# AT4P HD Color Screen Digital Display Rail Watt-Hour Meter

## ---Bluetooth version User Manual---

AC85~265V 50/60HZ 100A/max 26.5kw

**Function title bar**

**Various measurement parameters**

**Time and online icon**

(Display running time when not connected to the Internet, display calendar, when connected to the Internet)

**Temperature display**

(display the internal temperature when not connected to the Internet, and display the network temperature when connected)

### Specifications:

Model: AT4PB-Bluetooth

Voltage: AC 85-265 (V)

Basic current: 100A

Power range: Max 26.5KW

Energy Measurement range: 0 ~ 99999kWh

Accuracy: +1%

Frequency: 50/60 (Hz)

Power factor: 0-1.00PF

Power consuming: <0.3W

Display: voltage, current, real-time power consumption, total power

Product size: 97x76x76mm Rail Mounting Dimensions: 35mm

Ambient temperature: -20°C ~ +60°C

Screen Type: 2.4inch TFT-LCD HD Display Panel Graphic 240'RGB'320 Dot-matrix

\*Over current Protection

\*Over voltage protection

\*Under voltage protection

\*Set the electricity unit price function/accumulate electricity bills


\*Screen rotation and screen monitoring large display

### Notes:

Please search for **E-test** name in Google Play or **E-test** name in Apple Store Download app and install!

**Support android 5.0 above app and IOS 8.0 above APP!**

**Be sure to turn on the phone's Bluetooth mode and GPS positioning**

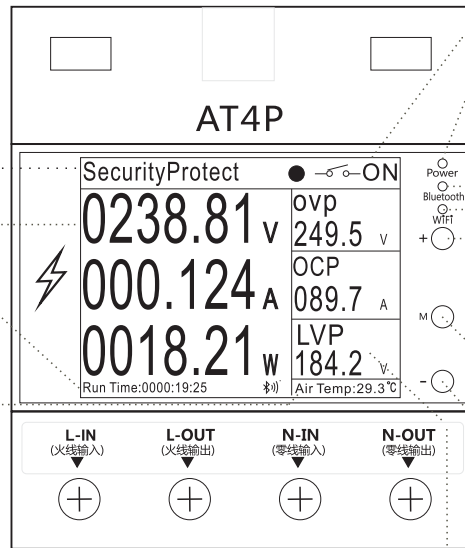

**ON/OFF/Auto switch**

**Power supply indicator**

**Bluetooth indicator**

(when you purchase the Bluetooth version, this light will display the Bluetooth status, the WIFI version will not display)

**WIFI indicator**

(when you purchase the WIFI version, this light will display the WIFI status, the bluetooth version will not display)

**Button +**

Short press to switch the switch mode, long press to switch the interface backwards

When the number is flashing, short press to increase, long

**Button M is the setting key/menu key**


Short press to flash the set number/repeated short press to switch the number position/long press to enter

**Button-**

Short press to switch the switch mode, long press to switch the interface forward. When the number is flashing, short press to decrease, long press to continuously decrease

**Multifunctional display bar**

### --Wiring method--

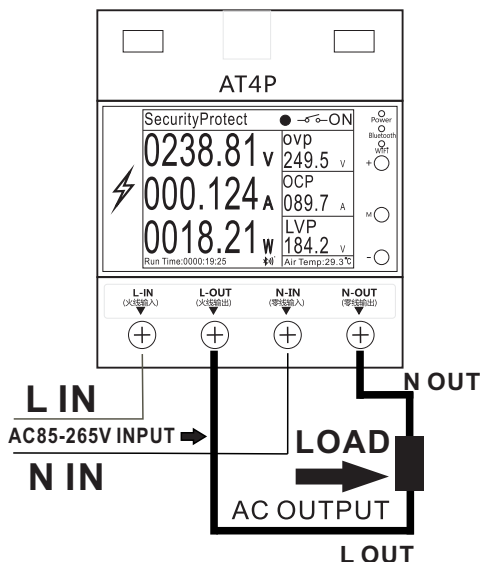

For more information, please scan the QR code to visit the official



Pay attention to safety, please strictly follow the wiring in the manual!

Mobile and computer APP software download address: <http://www.atorch.cn>