

Cat® DE65 GC

Diesel Generator Sets



Standby: 50 Hz & 60 Hz



Engine Model	Cat® C3.3 Inline 4-stroke Diesel
Bore x Stroke	105.0 mm x 127.0 mm (4.1 in x 5.0 in)
Displacement	3.3 L (201.4 in ³)
Compression Ratio	17.25:1
Aspiration	Turbocharged
Fuel Injection System	Inline
Governor	Mechanical

Image shown might not reflect actual configuration.


Model	Standby		Emission Strategy
	50 Hz kVA (ekW)	60 Hz kVA (ekW)	
DE65 GC	65.0 (52.0)	75.0 (60.0)	Low BSFC

PACKAGE PERFORMANCE

Performance		Standby	
		50 Hz	60 Hz
Genset power rating		65.0 kVA	75.0 kVA
Genset power rating with fan @ 0.8 power factor		52.0 kW	60.0 kW
Emissions		Low BSFC	
Performance number		P2506B	P2506A
Fuel Consumption			
Fuel tank capacity, litres (US gal)		103 (27.2)	
100% load with fan, L/hr (gal/hr)		15.3 (4.0)	18.2 (4.8)
75% load with fan, L/hr (gal/hr)		11.3 (3.0)	13.6 (3.6)
50% load with fan, L/hr (gal/hr)		7.8 (2.1)	9.5 (2.5)
Cooling System ¹			
Radiator air flow, m ³ /min (cfm)		110.4 (3899)	145.8 (5149)
Total coolant capacity, L (gal)		10.2 (2.7)	
Inlet Air			
Max. combustion air intake restriction, kPa (in H ₂ O)		8.0 (32.1)	
Combustion air inlet flow rate, m ³ /min (cfm)		3.9 (138)	4.9 (173)
Exhaust System			
Exhaust stack gas temperature, °C (°F)		571 (1060)	564 (1047)
Exhaust gas flow rate, m ³ /min (cfm)		10.4 (367)	12.5 (441)
Exhaust system backpressure (maximum allowable), kPa (in. water)		10.0 (3.0)	15.0 (4.4)
Heat Rejection			
Heat rejection to jacket water, kW (Btu/min)		38.0 (2161)	43.0 (2445)
Heat rejection to alternator, kW (Btu/min)		5.7 (324)	6.0 (341)
Heat rejection to atmosphere from engine, kW (Btu/min)		11 (626)	11 (626)
Heat rejection to exhaust (total) kW (Btu/min)		46.0 (2618)	54.0 (3074)

Alternator ²	50 Hz				60 Hz			
	380	415	400	480	440	220	380	240
Voltages	100	120	111	133	111	111	84	100
Motor starting capability @ 30% Voltage Dip, skVA	98.8	90.4	93.8	90.2	98.4	196.8	105.4	178.7
Temperature Rise, °C	150/40	150/40	150/40	130/40	150/40	150/40	163/27	163/27
Frame Size	A2133L4							
Excitation	S.E							

WEIGHTS & DIMENSIONS

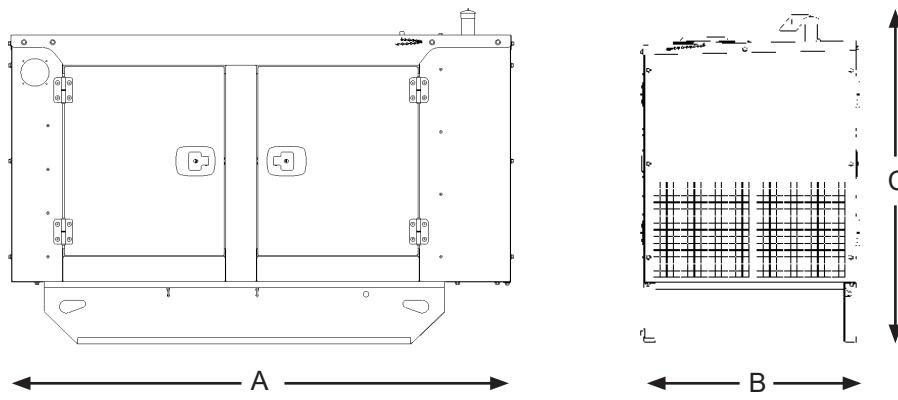

Note: General configuration not to be used for installation. See general dimension drawings for detail.

Dim "A" mm (in)	Dim "B" mm (in)	Dim "C" mm (in)	Dry Weight kg (lb)
2278 (89.7)	900 (35.4)	1332 (52.4)	1031 (2273)

[#]Weight includes standard generator, Enclosure and Integral Tank base.

APPLICABLE CODES AND STANDARDS:

AS1359, NFPA37, NFPA70, NFPA99, NFPA110, IEC 60034-1, ISO 3046, ISO 8528, 2006/95/EC, 2006/42/EC, 2004/108/EC.
 Note: Codes may not be available in all model configurations.
 Please consult your local Cat Dealer representative for availability.

STANDBY: Output available with varying load for the duration of the interruption of the normal source power. Average power output is 70% of the standby power rating. Typical operation is 200 hours per year, with maximum expected usage of 500 hours per year.

RATINGS: Ratings are based on SAE J1349 standard conditions. These ratings also apply at ISO 3046 standard conditions.

DEFINITIONS AND CONDITIONS

¹ For ambient and altitude capabilities consult your Cat dealer. Air flow restriction (system) is added to existing restriction from factory.

² Generator temperature rise is based on a 27°C ambient per NEMA MG1-32.

LET'S DO THE WORK.™

www.cat.com/electricpower

©2020 Caterpillar

All rights reserved.

Materials and specifications are subject to change without notice.

The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, LET'S DO THE WORK, their respective logos, "Caterpillar Corporate Yellow" the "Power Edge" and Cat "Modern Hex" trade dress as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.