



25 kg



1500 mm



±0.08 mm

CS625

CS SERIES



ELITE ROBOTS


CS625 | CS SERIES



Robotic Arm

Payload		25kg
Radius		1500mm
Accuracy		±0.08mm
Axis		6
Joints rotation	J1-J6	±360°
	J1-J2	125°/s
Joints speed	J3	150°/s
	J4-J6	210°/s
Typical TCP Speed		2.0 m/s
IP rating		IP65 (optional IP68)
Temperature range		-10~50°C
Relative humidity		<90% (non-condensing)
Noise reduction		<70db
Typical power usage		625w
Mounting		Any angle
Tool I/O connector		T1: M8, 8pin T2: Ø 12.8mm, 4pin
Tool I/O ports		4 config. DI / DO; 1 AI, 1 AO
Tool I/O power supply		T1: 0 / 12V / 24V; 3A / 2A / 1A T2: 24 V; 5A
Tool I/O communication		RS485
Footprint		Ø 240 mm
Weight		58 kg
Material		Aluminum, steel, plastic, rubber
Cable length		5.5m*
Certifications		ISO 13849, ISO 10218, ISO/TS 15066, ISO 14644 cleanroom class 5, RoHS, SEMI-S2; UL, CE, KCs
Programming		Python-script, graphical proprietary user interface, free-drag/offline programming

* Optional cable lengths of 1.5m, 3m and 10m and additional extensions up to 10m are available.

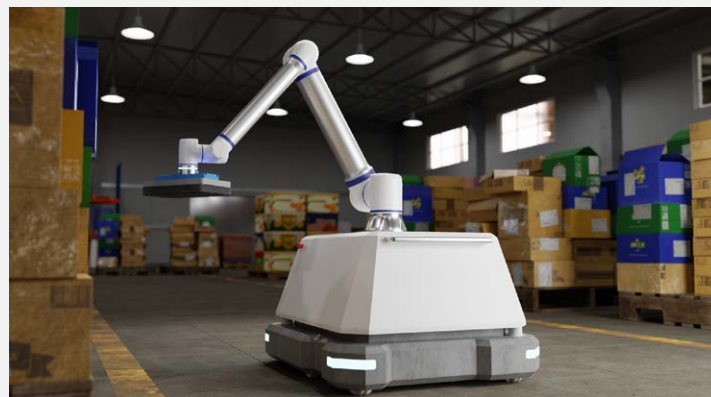

Featuring the same architecture as CS620, the CS625 is the cobot with the highest payload of the entire CS series. Yet, with a weight of only 58kg and an ultra-compact 240mm footprint (the same as CS620), this collaborative robot ensures broad versatility on any work floor.

Standard controller

Type	AC
I/O ports	24 DI, 24 DO (8 safety config. DI/DO); 2 AI, 2 AO; 4 High-Speed DI
I/O power supply	24V/3A (internal), 6A (external)
Communication	RS485, Ethernet TCP/IP, Modbus TCP/RTU, Ethernet/IP slave, Profinet slave
Size	505 mm x 257 mm x 447 mm
IP Rating	IP44
Weight	15 kg
Power source	100-240 VAC, 50-60 Hz
Temperature range	0~50°C
Relative humidity	95% (non-condensing)
Material	Aluminum, Steel



The standard controller integrates a holder to optionally attach the TP

OEM controller

Type	DC / AC
I/O ports	24 DI, 24 DO (8 safety config. DI/DO); 2 AI, 2 AO; 4 High-Speed DI
I/O power supply	24V/3A (internal), 6A (external)
Communication	RS485, Ethernet TCP/IP, Modbus TCP/RTU, Ethernet/IP slave, Profinet slave
Size	495mm x 200mm x 227mm
IP Rating	IP40
Weight	7.5 kg
Power source	AC: 100-240 VAC, 50-60 Hz DC: 40-55VDC
Temperature range	0~50°C
Relative humidity	95% (non-condensing)
Material	Aluminum, Steel



The optional OEM controller is suitable for integrators, OEM partners and users who want to create their own custom design.

Teach Pendant

	ERP400	ERP400S
Size	301mm x 232mm x 54mm	301mm x 232mm x 105mm
Screen size	12.1"	
Resolution	1280 x 800 pixels	
IP rating	IP54	
Weight	1.7 kg	1.8 kg
Cable length	5.5 m	
Temperature range	0~50°C	
Relative humidity	5%~95% (non-condensing)	
Material	Aluminum, plastic, rubber	
Input method	Capacitive full touch-screen	Capacitive full touch-screen, 3-mode enable key, jogging-keys, function keys



The CS teach pendant contains Elite Robots proprietary software. The optional ERP400S version integrates jogging and function keys and a 3-mode enable key for enhanced safety.

