# Medical Oxygen



## Description

Medical oxygen is considered to be non-toxic at atmospheric pressure. It is a colourless, odourless and tasteless gas.

## Applications

- Medical oxygen gas is essential for human respiration. In Anaesthesia, medical oxygen functions as a carrier gas for the delivery of anaesthetics agents to the tissues of the body. In Respiratory Therapy, medical oxygen is administered to increase its amount and thus decrease the amount of other gases circulating in the blood.
- Medical oxygen is also widely used in high altitude and underwater breathing, and hyperbaric chambers.

# Hazard statement(s)

- · May cause or intensify fire; oxidizer.
- Contains gas under pressure; may explode if heated.

#### Prevention statement(s)

- Keep/Store away from clothing/incompatible materials/combustible materials.
- Keep reduction valves free from grease and oil.

### Response statement(s)

In case of fire: Stop leak if safe to do so.

#### Storage statement(s)

• Protect from sunlight. Store in a well-ventilated place.

#### Other hazards

- No information provided.
- Do not open the cylinder valve before the regulator is connected.

Signal Word: Danger

UN No.: 1072

Hazard No.: 2(S)

Chem Symbol: O<sub>2</sub>

Pictograms:
















## General Specifications

| Specifications                          | B Cyl.    | C Cyl.    | CR Cyl.   | CXR Cyl.  | CL Cyl.   | D Cyl.    | E Cyl.    | G Cyl.         | 12 Pack                |
|---|-----------|-----------|-----------|-----------|-----------|-----------|-----------|----------------|------------------------|
| Cylinder/Pack - L<br>(101.325kPa @15°C) | 275       | 470       | 410       | 620       | 760       | 1,700     | 4,000     | 10,300         | 123,600                |
| Water capacity per<br>cylinder - L      | 1.7       | 2.9       | 3.36      | 3.36      | 3.6       | 10        | 23        | 50             | 600                    |
| Cylinder Colour                         | White     |           |           |           |           |           |           |                |                        |
| Outlet Connection                       | Pin Index |           |           |           |           |           |           |                |                        |
| Package Dimensions - mm<br>(H x W x D)  | 365 x 110 | 515 x 110 | 570 x 110 | 590 x 130 | 740 x 110 | 645 x 180 | 880 x 204 | 1,510 x<br>230 | 1,900 x 780 x<br>1,020 |

Cylinder dimensions are approximate – variations may occur due to manufacturing tolerances. Height includes the valve. Container sizes may vary from state to state.

## Package Sizes Available

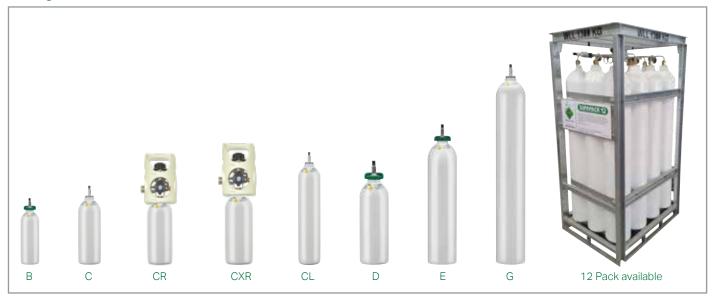

## Typical Analysis

| Product Type  | O <sub>2</sub> | CO <sub>2</sub> | СО    | Moisture |
|---------------|----------------|-----------------|-------|----------|
| Medical Grade | >99.5%         | <300ppm         | <5ppm | <67ppm   |



