



# Nuvo-10108GC Series

Industrial Edge AI Computer Supporting Single 350W NVIDIA® RTX™ GPU, Intel® 13th/ 12th-Gen Core™ Processor with Three Additional PCIe Slots



## Key Features

- Supports single NVIDIA® 350W GPU with Gen4 x16 single and dedicated GPU-locking bracket
- Intel® 13th/ 12th-Gen Core™ 35W/ 65W LGA1700 CPU
- Up to 64GB ECC/ non-ECC DDR5 4800 with Intel R680E chipset (2x SODIMM)
- Three x8 PCIe slots with Gen3 x4 signal for add-on cards
- 6x USB 3.2, 2x 2.5GbE, 1x GbE, and 1x optional 10GbE
- Two front-accessible storage options: 1x 2.5" SATA tray and 1x optional NVMe tray
- 8V to 48V wide-range DC input with ignition power control
- Rugged, -25°C to 60°C operation

Contact Neusys

Get Quote

## Introduction

Nuvo-10108GC is Neusys' response to the ruggedized Edge AI computer with extreme CPU and GPU performance for autonomous driving and AI-powered factory automation. It leverages an Intel® 13th/ 12th-Gen CPU and an NVIDIA® RTX™ 40 series or the latest RTX™ 6000 Ada GPU, offering single-precision GPU performances up to 48 TFLOPS or 91 TFLOPS, respectively.

Powered by an Intel® 13th/ 12th-Gen CPU with up to 24 cores and 32 threads, Nuvo-10108GC offers up to twice the performance compared to previous Intel® 10th or 11th-Gen platforms. In addition, Nuvo-10108GC supports ECC memory to deliver mission-critical computation, e.g., automated driving in urban traffic. It inherits a proven thermal dissipation design for the CPU and GPU to guarantee rugged, -25°C to 60°C wide-temperature operation. To withstand continuous shaking and juddering conditions in on-highway and off-highway applications, Nuvo-10108GC features an innovative GPU locking bracket to fasten the GPU with the chassis, and Neusys' patented damping bracket to absorb high-frequency vibration.

Nuvo-10108GC also features an abundance of I/Os, such as 6x USB3.2 Gen2, 3x 2.5GbE/GbE, and 1x optional 10GbE. Expansion-wise, Nuvo-10108GC offers 3x additional PCIe slots for GMSL2/ industrial camera frame grabbers and various add-on cards. Also, it provides 2x full-size mini PCI Express sockets for CAN bus/ COM/ WiFi expansion and 1x M.2 B key sockets for mobile connectivity with 4G LTE, 5G NR modules. In terms of data storage, Nuvo-10108GC offers an M.2 2280 M socket for Gen4x4 NVMe, and dual front-accessible storage options, including a 2.5" SATA HDD/SSD and an optional M.2 2280 Gen4x4 NVMe tray.

By utilizing Intel's 13th/ 12th-Gen platform, state-of-the-art NVIDIA® RTX™ GPU, and Neusys' industrial-grade power, thermal and mechanical designs with rich I/O and expansion, Nuvo-10108GC is a rugged edge AI platform that offers unprecedented GPU and CPU computing power for modern AI applications.

## Specifications

System Core	
<b>Processor</b>	Supporting Intel® 13th-Gen Core™ CPU (LGA1700 socket, 65W/ 35W TDP) - Intel® Core™ i9-13900E/ i9-13900TE - Intel® Core™ i7-13700E/ i7-13700TE - Intel® Core™ i5-13500E/ i5-13400E/ i5-13500TE - Intel® Core™ i3-13100E/ i3-13100TE Support Intel® 12th-Gen Core™ CPU (LGA1700 socket, 35W/ 65W TDP) - Intel® Core™ i9-12900E/ i9-12900TE - Intel® Core™ i7-12700E/ i7-12700TE - Intel® Core™ i5-12500E/ i5-12500TE - Intel® Core™ i3-12100E/ i3-12100TE - Intel® Pentium® G7400E/ G7400TE - Intel® Celeron® G6900E/ G6900TE
<b>Chipset</b>	Intel® R680E Platform Controller Hub
<b>Graphics</b>	Integrated Intel® UHD Graphics 770 (32EU)/ 730 (24EU)
<b>Memory</b>	Up to 128GB ECC/ non-ECC DDR5 4800 SDRAM (up to 2x 64GB SODIMM modules) <sup>[1]</sup>
<b>AMT</b>	Supports Intel vPro/ AMT 16.0
<b>TPM</b>	Supports dTPM 2.0
I/O Interface	
<b>Ethernet</b>	2x 2.5G Ethernet by I226-IT and 1x Gigabit Ethernet by I219-LM
<b>10G Ethernet (optional)</b>	1x 10GBASE-T port by Marvell AQC113CS, supporting NBASE-T (5G/ 2.5G) and 1000BASE-T (Optional)
<b>USB 3.2</b>	6x USB 3.2 Gen2x1 (10 Gbps) ports
<b>USB 2.0</b>	1x USB 2.0 ports (internal for dongle use)
<b>Video Port (Integrated Graphics)</b>	1x VGA connector, supporting 1920 x 1200 resolution 1x DisplayPort connector, supporting 4096 x 2304 resolution
<b>Serial Port</b>	2x software-programmable RS-232/ 422/ 485 ports (COM1/COM2)
<b>Audio</b>	1x 3.5 mm jack for mic-in and speaker-out
Storage Interface	
<b>SATA HDD</b>	1x front-accessible, hot-swappable HDD trays for 2.5" HDD/ SSD installation
<b>M.2</b>	1x M.2 2280 M key socket (PCIe Gen4 x4) for NVMe SSD 1x front-accessible M.2 2280 M key tray (PCIe Gen4 x4) for NVMe SSD (Optional)

Expansion Bus	
<b>PCI Express</b>	1x PCIe x16 slot @Gen4, 16-lanes with 65 mm slot width. The standard GPU locking bracket is designed for NVIDIA® RTX™ A4000, A5000, A6000, 6000 Ada, and selected RTX 40 Series GPU cards. 3x PCIe x8 slots @Gen3, 4-lanes
<b>Mini PCI Express</b>	2x full-size mini PCI Express sockets with internal SIM sockets
<b>M.2</b>	1x M.2 2242/3052 B key socket with internal SIM sockets
Power Supply	
<b>DC Input</b>	3-pin + 4-pin pluggable terminal block for 8V to 48V DC input with ignition control <sup>[2]</sup>
Mechanical	
<b>Dimension</b>	214 mm (W) x 400 mm (D) x 196 mm (H) (without damping bracket)
<b>Weight</b>	6.2 kg (excluding damping bracket)
<b>Mounting</b>	Wall-mount with damping brackets
Environmental	
<b>Operating Temperature</b>	With 35W CPU and NVIDIA® 350W GPU -25°C to 60°C <sup>[3]</sup> With 65W CPU and NVIDIA® 350W GPU -25°C to 60°C <sup>[3][4]</sup> (with optional fan kit) -25°C to 50°C <sup>[3][4]</sup> (without optional fan kit)
<b>Storage Temperature</b>	-40°C to 85°C
<b>Humidity</b>	10% to 90% , non-condensing
<b>Vibration</b>	MIL-STD-810H, Method 514.8, Category 4 (with damping bracket)
<b>Shock</b>	MIL-STD-810H, Method 516.8, Procedure I (with damping bracket)
<b>EMC</b>	CE/FCC Class A, according to EN 55032 & EN 55035

<sup>[1]</sup> As of Aug, 2023, the maximum single DDR5 SODIMM capacity is 48GB.


<sup>[2]</sup> System load under 100W, the required DC input range is 8V to 48V

System load between 100W to 480W (single GPU), the required DC input range is 18V to 48V

<sup>[3]</sup> For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.


<sup>[4]</sup> For 65W CPUs, the optional fan kit is recommended for operating at ambient temperatures higher than 50°C.

## Appearance

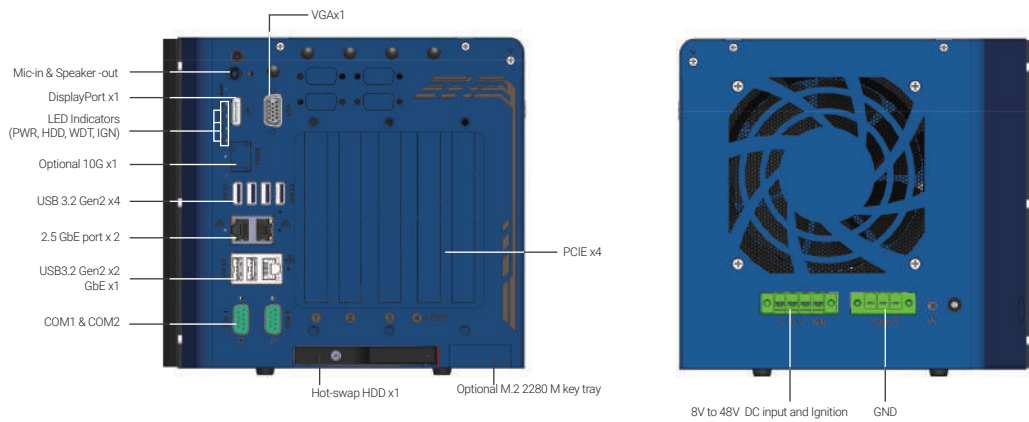

## Dimensions

Unit : mm

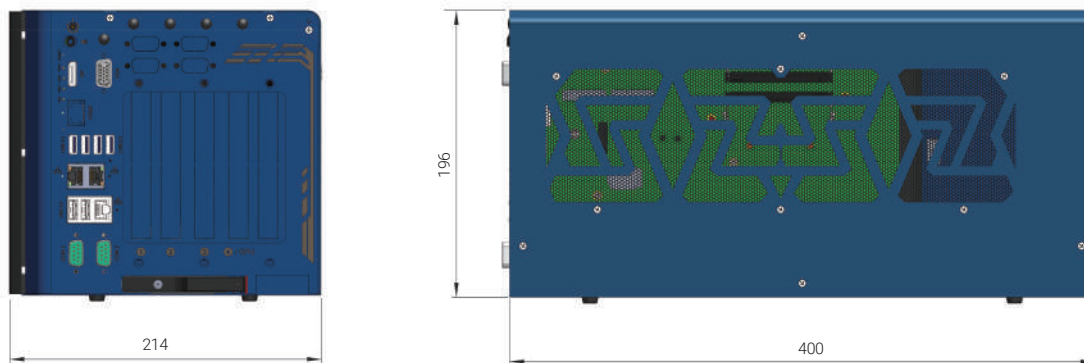

## Ordering Information

Model No.	Product Description
<b>Nuvo-10108GC</b>	Industrial-grade Edge AI Platform supporting single NVIDIA® RTX series 350W GPU Cards, Intel® 13th/12th-Gen Core™ processor with 3x additional PCIe slots
	<b>Optional 10GbE and M.2 2280 M key tray (PCIe Gen4 x4)</b>

## Optional Accessories

<b>AccsyBx-FAN-Nuvo10208GC</b>	Fan assembly for Nuvo-10108GC and Nuvo-10208GC series, 92x92x25 mm
<b>TY-NVMe-Nuvo10108GC</b>	M.2 NVMe 2230/42/60/80 SSD Tray for Nuvo-10108GC
<b>Cblkit-GPWR-N10108</b>	GPU power cable kit compatible with RTX A4000, A5000, and RTX A6000 for the Nuvo-10108GC. Wafer ATX3.0 PCIe 5.0 12VHPWR(12+4P) to x2 Wafer 4.2 6P + 2P, Black, 20AWG, -20°C to +80°C, Length: 35cm
<b>PA-600W-ENC</b>	600W AC/DC power adapter 24V/25A; cord end terminals for terminal block, operating temperature : -20°C to 70°C.
<b>PA-1000W-MW-2</b>	AC/DC power supply providing 1000W output power for 90V - 264V AC input voltage and offers rated voltage 24V.