



# CHAIN BLOCK & LEVER BLOCK

**Affordable  
excellence  
in chain and  
lever blocks.**

**Chain Block**  
500kg to 2000kg

**Lever Block**  
750kg to 3000kg


New from HES comes an economy range of chain and lever blocks offering the same commitment to quality as our premium range. These blocks are equipped with features that make them a durable option at an economy price, giving customers another alternative when making their buying decision, depending on their lifting needs.

**12-MONTH WARRANTY**

**FULL 12-MONTH  
REPLACEMENT WARRANTY  
ACROSS THE WHOLE RANGE**  
CONDITIONS APPLY\*



# CHAIN BLOCK 500KG TO 2000KG

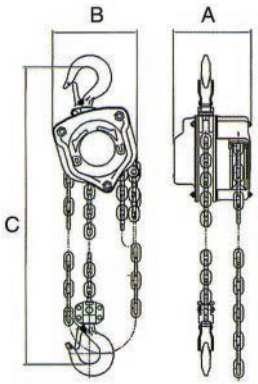

## FEATURES & BENEFITS

**All steel construction:** Good for industrial environments where dependability is a must.

**Weatherproof twin pawl brake:** Weston style two pawl brake designed to hold the load during the operation.

**Industrial grade powder coating:** Provides a long lasting finish in harsh environments.

**Zinc plated hand chain:** Provides a durable finish.

**Fully enclosed gearing:** Protects the gears from debris and contamination.

**Individual Test Certificate:** Each hoist is tested at 150% of WLL.

**Individual serial number:** Allows for complete traceability throughout the manufacturing process.

**Minimum head room:** Ideal for restricted space applications.


**Grade 80 alloy chain:** Calibrated load chain.

**Forged alloy steel hooks:** Designed for rugged applications.

**Bearings:** Load sheave rotates freely during operation.

Model	Capacity	Standard Lift	Running Test Load	Falls of Load Chain	Load Chain Diameter	Dimensions			Net Weight
						A	B	C	
HES05T3	500kg	3m	750kg	1	5mm	129mm	136mm	270mm	8.4kg
HES05T6	500kg	6m	750kg	1	5mm	129mm	136mm	270mm	13kg
HES1T3	1000kg	3m	1500kg	1	6.3mm	151mm	145mm	317mm	12kg
HES1T6	1000kg	6m	1500kg	1	6.3mm	151mm	145mm	317mm	16kg
HES2T3	2000kg	3m	3000kg	1	8mm	161.5mm	187mm	414mm	20kg
HES2T6	2000kg	6m	3000kg	1	8mm	161.5mm	187mm	414mm	28kg

# LEVER BLOCK 750KG TO 3000KG

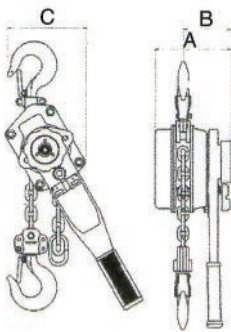

## FEATURES & BENEFITS

**All steel construction:** Good for industrial environments where dependability is a must.

**Weatherproof twin pawl brake:** Weston style two pawl brake designed to hold the load during the operation.

**Industrial grade powder coating:** Provides a long lasting finish in harsh environments.

**Fully enclosed lift wheel:** Helps keep debris from contaminating the lift wheel.

**Steel handle with rubber grip:** Provides a non slip, sure grip surface.

**Pocket wheel tab:** Helps keep debris from entering the load sheave.

**Individual Test Certificate:** Each hoist is tested at 150% of WLL.

**Individual serial number:** Allows for complete traceability throughout the manufacturing process.

**Minimum head room:** Ideal for restricted space applications.

**Grade 80 alloy chain:** Dependable calibrated load chain.

**Forged alloy steel hooks:** Designed for rugged applications.

**Bearings:** Load sheave rotates freely during operation.

Model	Capacity	Standard Lift	Running Test Load	Falls of Load Chain	Load Chain Diameter	Dimensions			Net Weight
						A	B	C	
HES75T	750kg	1.5m	1125kg	1	6mm	148mm	87.5mm	135mm	7kg
HES15T	1500kg	1.5m	2250kg	1	8mm	176mm	102mm	157mm	11kg
HES3T	3000kg	1.5m	4500kg	1	10mm	195mm	109mm	210mm	19kg

**FULL 12 MONTH REPLACEMENT WARRANTY.** \* Warranty Policy: The HES Chain and Lever Block range is guaranteed to be free of defects in materials and workmanship. If one of these products is found to be defective due to materials or workmanship within 12 months of purchase, it will be replaced with a new unit at our discretion. This guarantee does not apply to any product showing signs of misuse, overloading, alteration or improper maintenance.



### HES NSW

31 Mangrove Lane  
Taren Point NSW 2229  
T: 1300 792 464  
F: 1300 309 041  
E: sales@hesnsw.com.au  
www.hesnsw.com.au

### HES VIC

16 Fink Street (Cnr Chifley Dr)  
Preston VIC 3072  
T: (03) 9480 5577  
F: (03) 9480 0855  
E: sales@hesvic.com.au  
www.hesvic.com.au

### SCHILLINGS SA

41 Second Street  
Wingfield SA 5013  
T: (08) 8244 7611  
F: (08) 8244 7699  
E: sales@schillings.com.au  
www.schillings.com.au