



PROVEN PERFORMER

Vended Tumble Dryers

SA030, SA055, SA075

Features

- Large door opening for easy loading and unloading
 - extra strong hinge and reversible door
- Galvanized drum - oval drum holes preventing damage from standard drywall screws
- Unique drum supporting system (axial airflow only)
 - at the rear: bearing
 - at the front: rubber rolls with bearings
- Large lint filter - easy removal of lint, efficient drying
- Axial airflow (SA030, SA055)
 - drum perforations only at the front and back
 - maximum airflow, less energy consumption and short drying times
- Radial airflow (SA075)
 - drum perforations over the entire surface
 - high production
 - pulley drive system
- Average of 40% lower energy input compared to the Speed Queen classic tumblers
- Overall utility savings per year are around 5%

- Quantum™ Gold Control
 - easy to operate, easy to program
 - flexibility of 5 programmable cycles
- Single slot electronic multi denomination coin drop for versatility and accuracy
- Digital display and countdown

Options

- Electric and Steam heat
- Stainless steel front
- Stainless steel drum
- Reversing: prevents tangling of the linen
- ECO Energy saver models
- Cashless Payment by Credit Card Activation



Supporting Smart Card, Tap & Go, Mag Stripe


- Speed Queen Insights Network Gateway and Subscription - Cashless APP Payment and Equipment Management online.




EASY OPERATION



LOW ENERGY CONSUMPTION





LARGE DOOR OPENING



HIGH OUTPUT



Quantum™ Gold Control

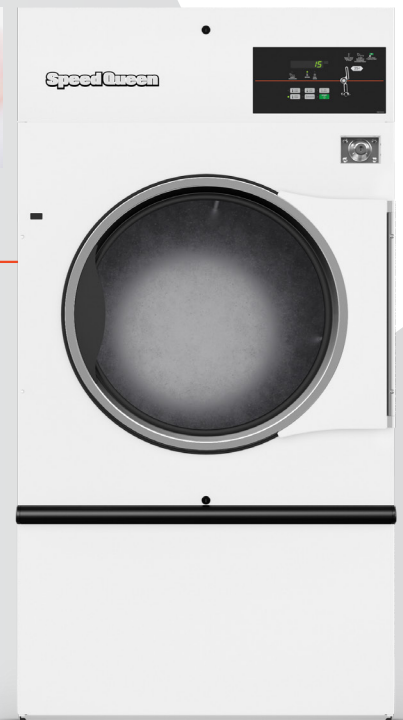

Controls

Quantum™ Gold

In addition to its network capabilities and remote off-site management features, Quantum™ Gold offers additional owner and customer benefits such as PC programming and machine audit capabilities, as well as time-of-day pricing, a "lucky cycle" for loyal customers and the ability to interface with the store owner's payment systems. Cycle modifier keys create additional profit opportunities for store owners.


	SA030	SA055	SA075
Drum			
Capacity 20:1 kg	14kg	25kg	34kg
Volume Lt	270	490	634
Cylinder diameter mm	673	838	939
Motor			
Fan kW (non-rev/rev)	0.19/0.19	0.37/0.37	0.56/0.25
Drive kW (non-rev/rev)	0.19/0.19	0.37/0.19	0.56/0.25
Programmer			
Type of control	Quantum Gold	Quantum Gold	Quantum Gold
Cabinet			
Colour	White, option stainless steel	White, option stainless steel	White, option stainless steel
Drum	Galvanized, option stainless steel	Galvanized, option stainless steel	Galvanized, option stainless steel
Heating			
Gas 50 Hz	68 MJ	108 MJ	174 MJ
Electric	12 kW	18 kW	21 kW
Connection			
Electrical (Gas Heat)	240V/50Hz/1	240V/50Hz/1	240V/50Hz/1
Full Load Amps / Breaker Size Amps	6.0 / 15	7.0 / 15	7.0 / 15
Electrical V / Hz			
Make up air supply	710 cm ²	929 cm ²	1258 cm ²
Air outlet diameter mm	150	200	200
Steam inlet (NPT)	n/a	n/a	n/a
Steam Outlet (NPT)	n/a	n/a	n/a
Gas inlet (NPT)	12mm	12mm	12mm
Operation			
Drying cycles	5	5	5
Radial drying system yes or no	Axial	Axial	Yes
Power			
With reversing (where available)	Option	Option	Option
Motor HP Fan kW (non-rev/rev)	0.19/0.19	0.37/0.37	0.56/0.25
Motor HP Drive kW (non-rev/rev)	0.19/0.19	0.37/0.19	0.56/0.25
Transport data			
Gross weight kg	165	216	307
Net weight kg	150	197	279
Dimensions H×W×D mm	1625×711×1155	1700×875×1350	1960×980×1350
Packaging dimension H×W×D mm	1720×762×1240	1829×902×1499	2120×1060×1420
Volume m ³	1.6	2.5	3.1
Agency Approvals Australian Gas Approval CE Approval	#7401 Yes	#7401 Yes	#4944 Yes

SQ Insights Pro

Allows a closer association with the end user and the ability to adapt and change as required. It also allows for a great networking and marketing campaigns. Enables the customer to reach end users for specific targets. Insights PRO: Reporting, monitoring, and SQ Pay Cashless Payment + Rewards APP all in one online platform - accessible from anywhere


Insights: Cloud-based management platform

- No software to install
- All the features you are used to from Quantum
- Supported and upgraded by Speed Queen remotely.

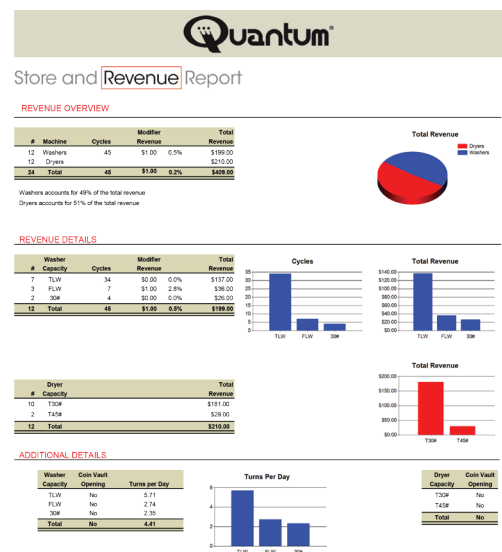

Dimensions

All measurements are in mm.

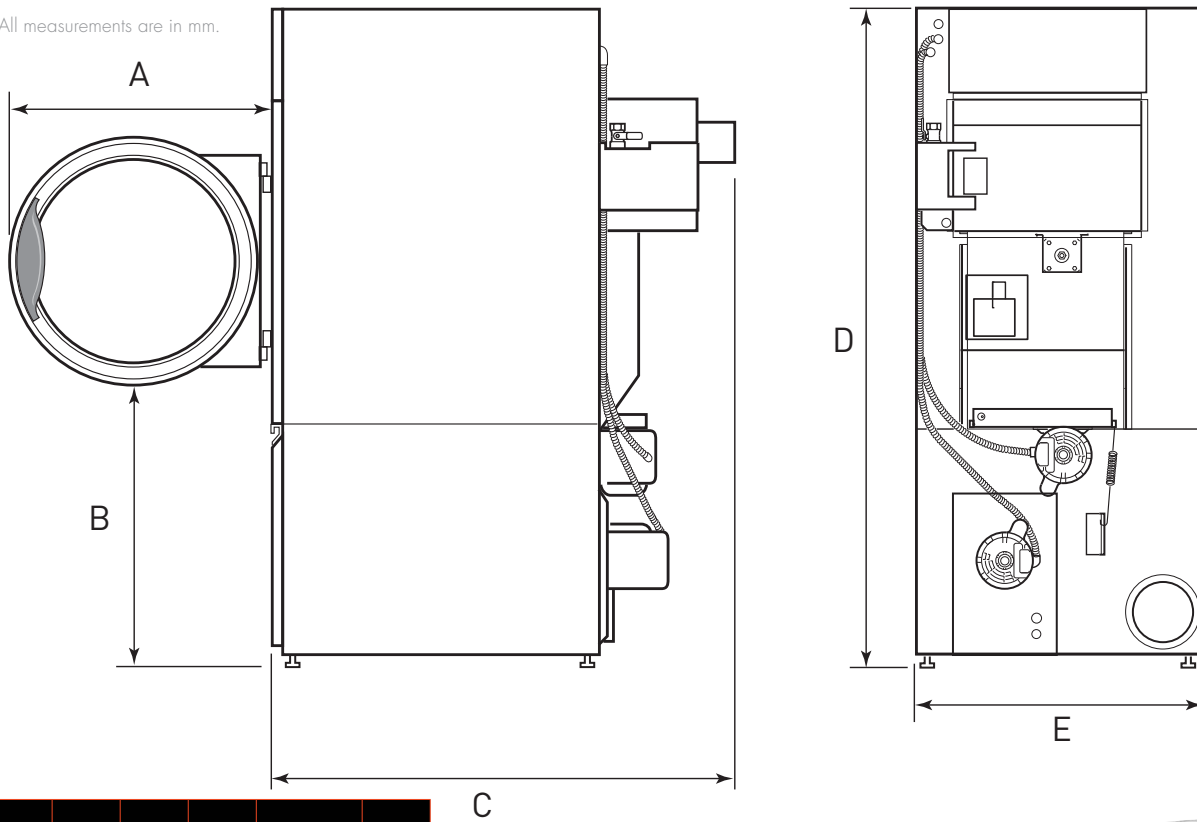

	A	B	C	D	E
SA030	667	699	1191	1622	711
SA055	810	682	1365	1694	876
SA075	860	781	1378	1946 (G/E) 2032 (S)	981
			depth	height	width

NOTE: When positioning units - allow for service access and Energy Safe requirements behind and above the unit.

Manufacturer recommends clearance of 610mm at rear and 300mm above cabinet body.



All measurements are in mm. *With levelling legs turned into base.

NOTE: Exhaust openings are 150 or 200 mm metal ducting.

IMPORTANT: The dryer should have sufficient clearance around it for needed ventilation and for the ease of installation and servicing.

Please refer to Installation guide for correct make up air requirements - open space behind these units is required for service access (min 400mm)

For maximum drying performance, we recommend that more clearance be allowed around the dryer than the minimum indicated.





Andrew Barton Laundry Systems.
67 Colebard Street West, Acacia Ridge,
QLD 4110
Ph: +61 7 3716 1333
Fax: +61 7 3716 1398
W: www.andrewbarton.com.au
E: info@andrewbarton.com.au
Servicing Queensland.

The content of this brochure (including, without limitation, any analysis forming part of it) is general information, for personal use only and should not be relied upon for investment purposes. This brochure provides information based on subjective assumptions and does not provide actual or expected returns, which may in practice be lower than those stated in the brochure. You should obtain independent financial advice prior to making any decision to invest in, or with, Alliance Laundry Systems LLC. To the extent permitted by law, we do not accept any liability (whether in contract, tort, negligence or otherwise and howsoever arising), nor owe any duty of care to you, for any consequences of your acting (or refraining from acting) in reliance on the contents of this brochure. If you enter into a contract with us, we will require that you irrevocably waive your rights to bring a claim against us for acting in reliance on the content of this brochure. E&OE