

# 9KG FRONT-LOAD WASHERS



## MHN33



### DURACORE DRIVE SYSTEM

- DuraCore Drive System is designed and tested to run 15,000 cycles\*
- Watertight, flexible triple-lip seal with garter spring keeps moisture away from the shaft, protecting the premium bearings
- Durable shaft sleeve is designed to eliminate shaft wear



### INTELLIGENT CONTROLS WITH M-SERIES TECHNOLOGY

- Offer flexibility and individual cycle pricing options for optimal earnings
- One-touch cycle selection allows end users to easily choose their preferred wash selection
- Built-in diagnostics help streamline service calls



### ADVANCED SPIN TECHNOLOGY

- Delivers more consistent cycle times\*\*
- Offers automatic load balancing through a six-point suspension to provide optimal stability for the entire wash unit



### BUILT TO LAST

- Front-access panel — easy to remove, which streamlines service by providing fast access to internal components
- Heavy-duty die-cast door hinge — opens 180° and is built to withstand the rigors of commercial laundry
- Accelerometer — takes an accurate reading of cabinet vibration to reduce out of balance loads and ensure fast final spin speeds
- Durable soap dispenser — its sturdiness adds to the machine's overall durability



### CARD READER COMPATIBLE

- Order your new washer as Card Only to prevent vandalism and increase safety on site.
- Never have to worry about where the gold coins from your laundry end up with real time reporting and payment deposited straight into your nominated bank account.



**COIN DROP OR  
CARD READER READY**  
MHN33PD (pictured)



**NON-COIN**  
MHN33PN (pictured)

9kg Front-Load Washer Models	
Payment Configuration	Model Number
Coin Drop or Card Reader Ready	MHN33PD
Non-Coin	MHN33PN





See [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) for warranty details.

# 9KG FRONT-LOAD WASHERS



## MHN33

### SIDE VIEW

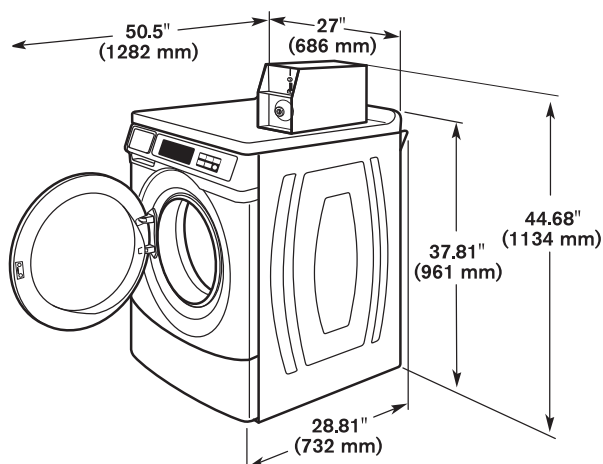

\*Includes height of metercase.

\*\*Based on 2018 United States DOE J2 Testing with factory preset cycles.

Dimensions are for planning purposes only. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

MODELS	MHN33PD	MHN33PN
PAYMENT CONFIGURATION	COIN DROP OR CARD READER READY	NON COIN PUSH TO START
<b>CAPACITY</b>		
Cylinder Volume — liters	88	88
Cylinder Diameter — mm	547	547
Cylinder Depth — mm	341	341
<b>DIMENSIONS</b>		
Depth — mm	732	732
Width — mm	686	686
Height — mm	1,134*	961
Door Opening — mm	362	362
<b>CRATED DIMENSIONS</b>		
Crated Width — mm	737	737
Crated Depth — mm	851	851
Crated Height — mm	1,232	1,029
<b>APPROXIMATE WEIGHT</b>		
Uncrated — kg	111	107
Crated — kg	115	111
<b>ELECTRICAL REQUIREMENTS</b>		
Voltage	220-240V - 50Hz	220-240V - 50Hz
Frequency	50Hz	50Hz
Breaker/Fuse — Amps	10	10
<b>WATER INLET HOSE/DRAIN HOSE</b>		
Operating Pressure — psi (bar)	20–100 (1-8)	20–100 (1-8)
Inlet Hose Length — m	1.22	1.22
Drain Hose Length — m	1.83	1.83
<b>APPROXIMATE WATER USAGE</b>		
Average Total Water Usage Per Cycle — liters	40.50**	40.50**
Extract Speed — Max G-Force/Max RPM	300/1,000	300/1,000
Motor Size — hp (kW)	.09 (.07)	.09 (.07)