

# monitor LiFTS

SYDNEY MELBOURNE BRISBANE TAMWORTH

monitor.net.au • 1800 025 024

## MONITOR 1380 SPIDER LIFT





# MONITOR 1380

**The Monitor 1380 Spider Lift's light weight and amazingly compact stowed dimensions allows it to be used in the most difficult locations.**

The light-weight basket is simple to remove in less than one minute, allowing very narrow

access and reducing the stowed length to only 3.64 m.

The Monitor 1380 Spider Lift is a simple, strong machine, ideally suited to commercial contractors such as painters, electricians and shed builders.

The large fly-jib is designed for maximum travel and flexibility. The drive controls can be operated via a remote control for ease of manoeuvrability.

Expandable tracks provide stability on uneven terrain, and narrow access ability when required for confined areas.










**12.99m**  
WORKING HEIGHT







# TECHNICAL SPECIFICATIONS

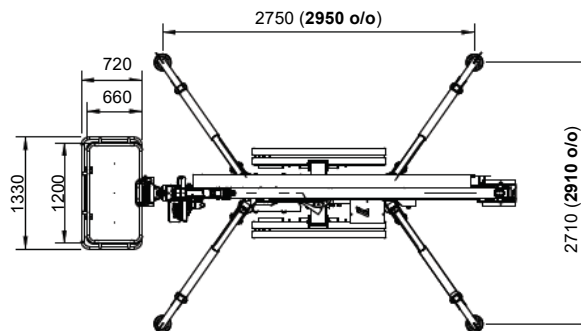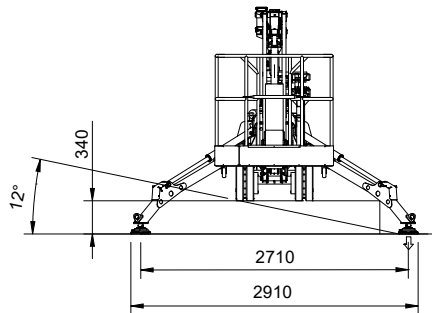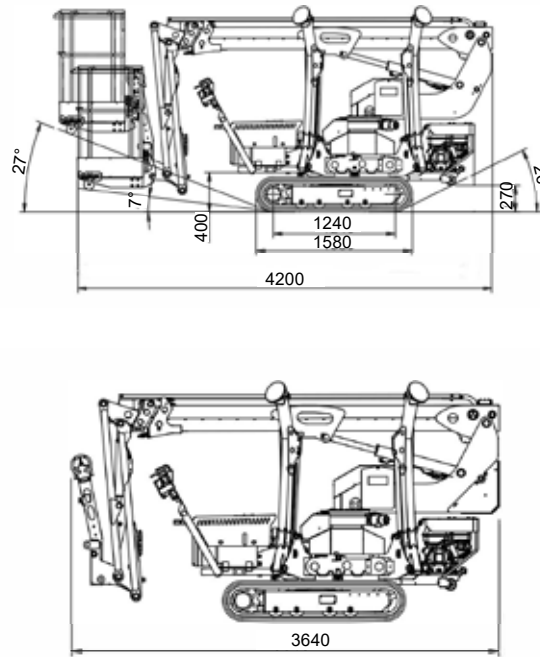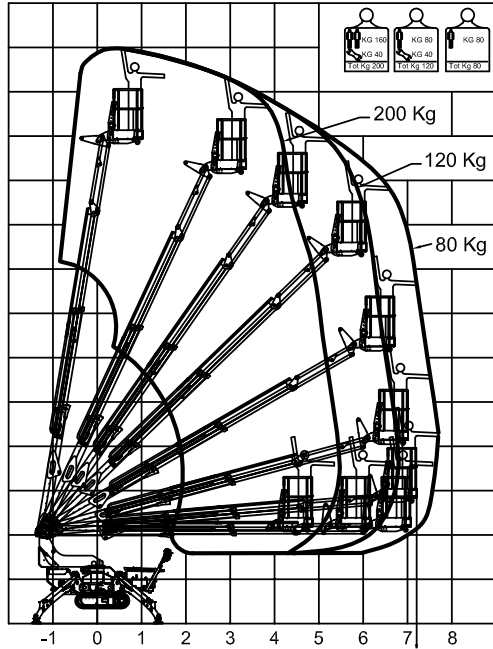

Max working height	12.99 m
Max horizontal outreach	7.70 m
Max rated capacity	200 kg
<b>Weight: Engine + 240v</b>	<b>EP 1800 kg</b>
: Engine + Batteries	BP 1842 kg
Turret rotation	360°
Basket rotation	N/A
Ground pressure driving (approx)	37.8 kN/m <sup>2</sup>
Max stabiliser force	11.81 kN
Max stabiliser pressure (std foot pad)	375 kN/m <sup>2</sup>
Traffic load (live load) travelling	3.1 kN/m <sup>2</sup>
Traffic load (live load) stabilised	2.3 kN/m <sup>2</sup>
Auto levelling	N/A
Max slope for stabilisers (no extra pads)	12°
Gradeability lengthwise	15°
Gradeability sideways	12°
Standard engine	Honda 13 Hp Petrol
Optional engine	Hatz 7 Hp Diesel
Dual power options	240V or Batteries
Expanding tracks	Std
Max drive speed	2.4 km/h
Drive control	Wired remote
Electric emergency lowering	Optional

(All specs E&OE and subject to change)







# GET IN TOUCH

You may contact us at [monitor.net.au](http://monitor.net.au), or call us at 1800 025 024.



MONITOR 1380 - SPIDER LIFTS

