



POSILIFT

LIFTING AND POSITIONING EQUIPMENT

Making All Lifting and Positioning Safer and Easier

ARMTEC BAG HANDLER

A QUALITY BAG HANDLER AT A LOWER PRICE

(A MANIPULATOR PRICED AS A VACUUM TUBE)

MORE PRODUCTIVITY WITH LESS EFFORT

RIGID ARM

BALANCED

WEIGHT PRE-SELECTOR

- Easier to Use
- Faster to Use
- Less Tiring
- Greater Control
- More Reliable
- Less Maintenance
- Less Downtime
- Lower Operating Costs

QUALITY—RELIABILITY

DURABILITY



Lift, Move and Place bags up to 50kg weight.

Column, Overhead Fixed or Overhead Running configurations.

12 months warranty. CE Certified

The Armtec RA50 Bag Handler is a light, compact Industrial Manipulator specifically designed to lift, move and place bags weighing up to 50kg.

“NoLoad” and “Load” balancing makes it weightless as if floating to the operator. Makes it faster, easier and safer to use.

Greater Productivity with Less Effort.

All Armtec equipment is designed, manufactured and tested to International Standards. Built in China to Armtec specifications and under Armtec supervision and quality control.

Available in Column, Overhead Fixed or Overhead Running configurations and available with all the features needed for most situations. Priced to compare with a vacuum tubes.

Many options and accessories available.



Posilift Pty Ltd

Suite 1A, Level 2, 802 Pacific Highway

Gordon NSW 2072 Australia

Phone: (02) 9415 1914

Email: sales@posilift.com.au

Web: www.posilift.com.au




POSILIFT

LIFTING AND POSITIONING EQUIPMENT

Making All Lifting and Positioning Safer and Easier



Weight Capacity: 15-50KG
Radius: 790-2500mm
Supply: 7 bar, clean & dry compressed air and 415V 3 Phase 50HZ Electricity
Configuration: Column, Fixed overhead, Mobile overhead

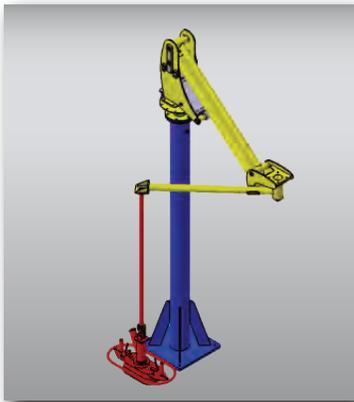

At rest the manipulator and tooling are in a "No Load" condition. They are balanced as if weightless. The operator can move the head up down and around the work area with no effort. The operator places the head onto a bag and the manipulator grips and automatically switches to a "load"

condition. The operator can now move the bag up down and around the work area, again with no effort as if weightless. Once the bag is placed in the correct position the operator releases by simply squeezing the handles. The manipulator automatically returns to "no load" and is ready to start the next cycle.