

BTE1-7



GSR E209PX on Hino 817 4x4 Truck





GSR E209PX on Hino 817 4x4 Truck



Double articulating + telescopic boom for up and over functionality.



The E209PX is a super compact 20 m truck mounted lift. This versatile package is a favourite with tree trimming & trades industries. The compact boom is made up of a double articulating boom giving straight "Plumb line" movement making it great for working up a vertical face such as the side of a building. The top section is telescopic providing point and shoot functionality providing 9m outreach. With almost zero tail swing, it is well adapted to work roadside and in confined spaces.



BTE1-7 GSR E209PX ON HINO 817 4X4 TRUCK



➤ GSR E209PX on Hino 817 4x4 Truck

The E209PX truck mounted lift is extremely rigid, and safe to accommodate 2 persons and tools with a maximum rated capacity of 220 kg. The heavy-duty hydraulic proportional multifunctional joysticks are housed within a fully protected area and provide the operator with exceptional smoothness and accuracy even at full height and outreach. Hoses and cables are placed within the booms, with internal tracking which is protected from debris by a set of self-cleaning brushes placed at each of the telescopic sections



Upper Controls



Lower Controls



GSR E209PX on Hino 817 4x4 Truck



- 20m reach on a compact 4x4
- Simple Hydraulic Controls providing super smooth operation
- Vertical Legs offering massive correction
- Easy boom to ground access



BTE1-7 GSR E209PX ON HINO 817 4X4 TRUCK



GSR E209PX on Hino 817 4x4 Truck

No tail swing – great for roadside and confined area operation.

Telescopic boom offering point and shoot functionality.

Smooth controls – compliant with 1418.10

Double articulating boom providing “plumb line” vertical movement.

Easy to use rear controls for fast and safe deployment

Straight down outriggers with massive correction



SPECIFICATIONS



Specifications:	
Manufacturer	GSR
Model	E209PX
Working height	20.2m
Height(ground to bucket floor)	18.2m
Working radius	8.50m
Insulation	No
Boom style	Articulating/Telescopic
Boom slew rotation	450° non continuous
Bucket rotation	140°
Bucket capacity SWL	220kg
Control type	Hyd.
Power lead to basket	No
Truck Specifications:	
Make	Hino
Model	817
Specifications	4x4
HP	170
Transmission	Manual

Weights & Dimension's on base unit:	
GVM (kg)	7,500
Tare Weight (kg)	6,185
Front axle max. (Kg)	11,000
Rear axle max. (Kg)	2,800
Kerb mass front axle (Kg)	6,200
Kerb mass rear axle ((Kg)	2,610
Kerb mass total (Kg)	3,575
Payload max.(Kg)	6,185
Length (mm)	1,315
Wheelbase (mm)	6,650
Height (mm)	3,500
Width (mm)	3,400
Width (mm)	2,300




BTE1-7 GSR E209PX ON HINO 817 4X4 TRUCK





DIMENSIONS

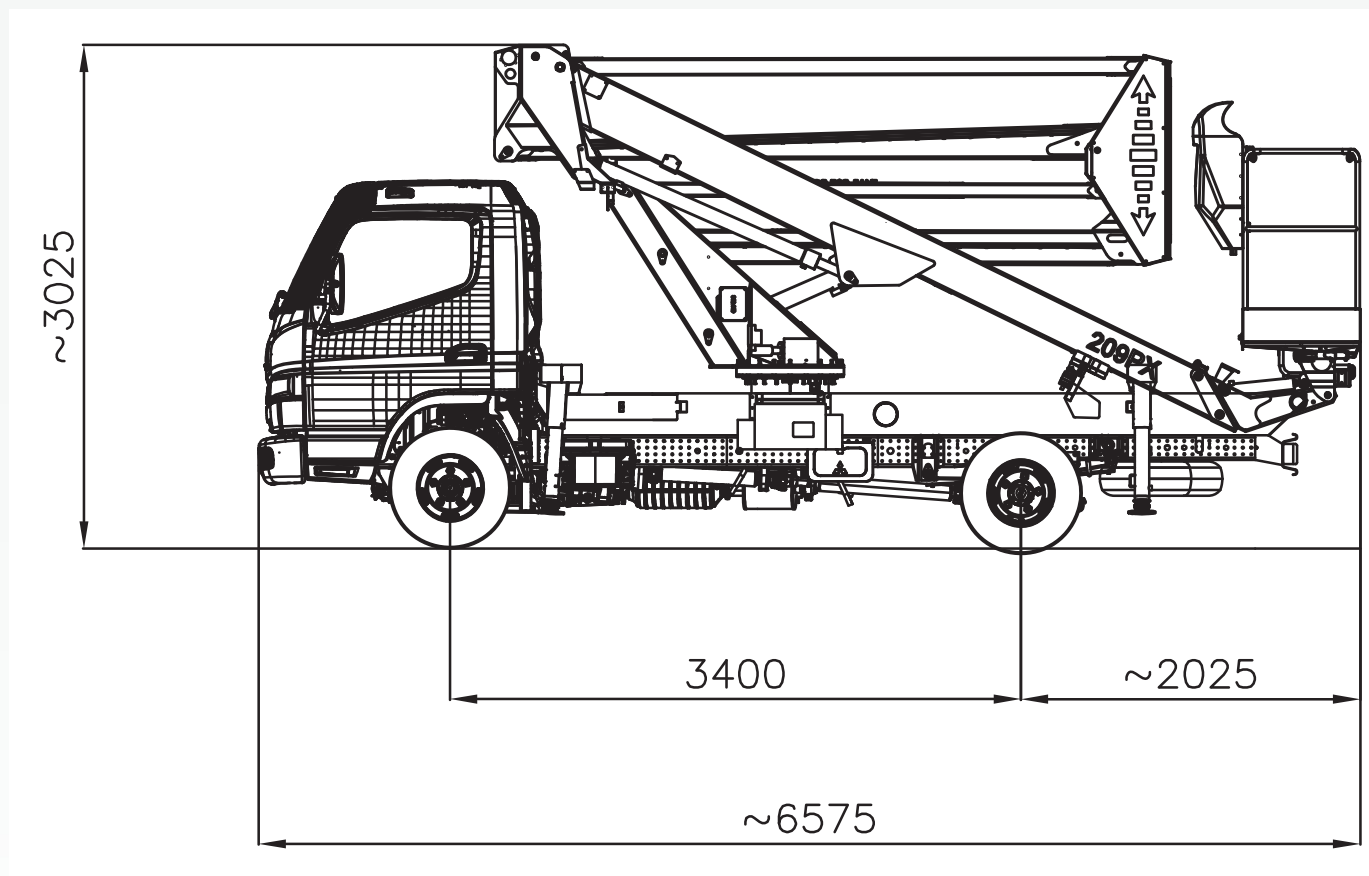


BTE1-7 GSR E209PX ON HINO 817 4X4 TRUCK





RANGE DIAGRAM

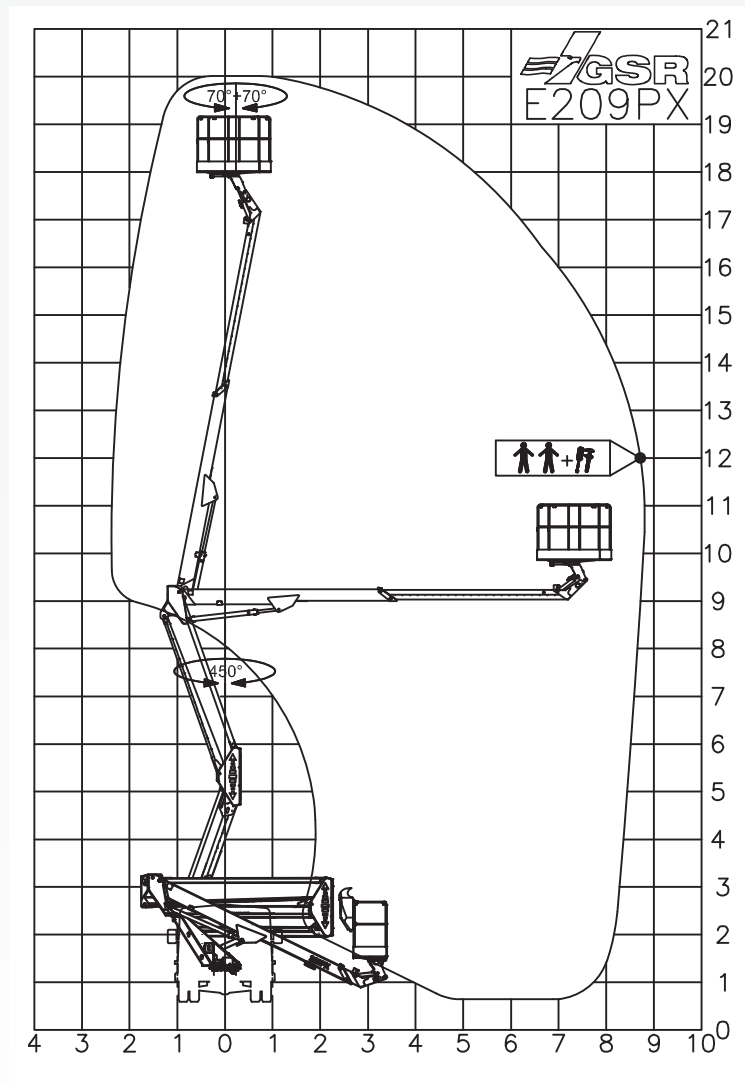

BTE1-7 GSR E209PX ON HINO 817 4X4 TRUCK



GET IN TOUCH

WAIMEA.NET.AU

02 8610 5601



CONTACT DETAILS



Kingsley Thomas
SALES

✉ Kingsley.thomas@waimea.net.au

☎ +61 4 3760 7712

WAU Number 0286 105 601

Toll free 1800 413 180



WAIMEA.NET.AU | 02 8610 5601

