

XE15SE Mini Excavator

MXG
Tough From Design






- ☆ Engine: Yanmar 3 cyl diesel water cool
- ☆ TOPS and FOPS certified canopy
- ☆ Easy access to engine gas strut hood
- ☆ Hydraulic hoses hidden inside the boom
- ☆ Swing boom/Arm,Extendable tracks
- ☆ Large ranges of attachments available

All models are upgraded to 4 legs/bar canopy.Please check with our sales team.

☎ 0401 347 788
☎ 03 8900 2987
✉ Info@mxg.com.au

🌐 www.mxg.com.au
📍 Melbourne Branch: 10-14 Citrus St, Braeside VIC 3195
📍 Brisbane Branch: 15-19 Elliott Court Hillcrest QLD 4118

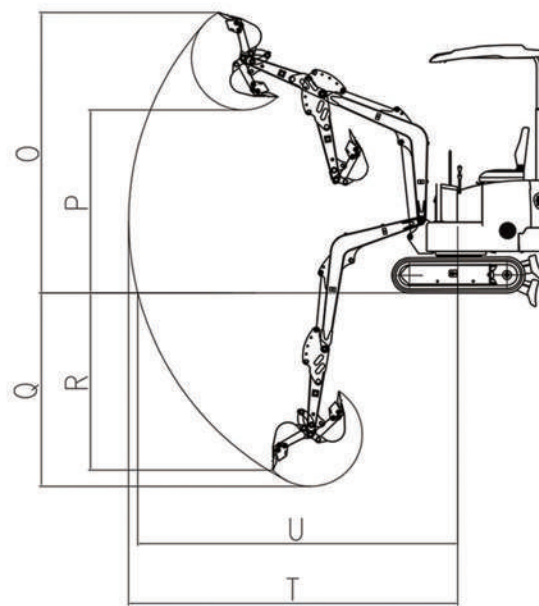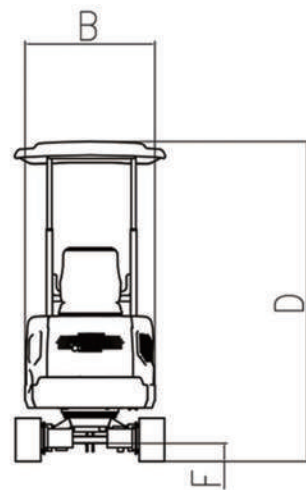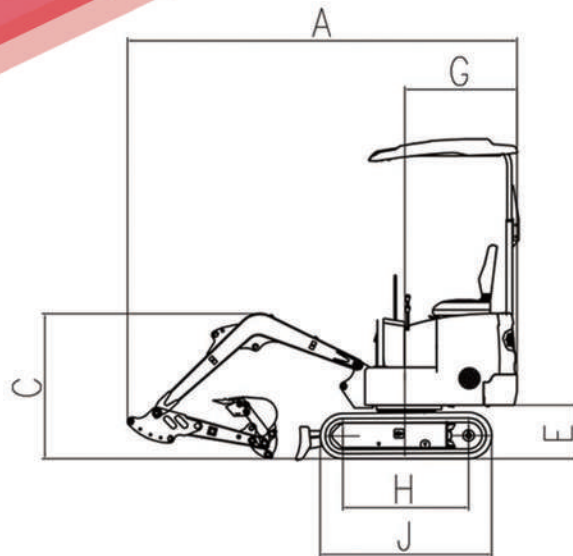

Specifications Model/Major	XE12S	XE15SE
Operating Weight(KG)	1200	1400
Engine Model	Koop KD192	Yanmar3TNV70
Rated Power(Kw/Hp)	8.6/11.7	14 kW/20.8HP
Max.Flow(L/min)	18	20.4
Working Pressure(Mpa)	16	18
Travel Speed(km/h)	2.2	2.2
Swing Speed(r/min)	13	12
Bucket Capacity(m³)	0.022	0.03
Fuel Tank Capacity(L)	7	15
Hydraulic Oil Tank Capacity(L)	9.4	13
Max.Gradeability	58%/30°	58%/30°
Ground Pressure(Kpa)	28	30
Arm Digging Force(KN)	4.6	6
Bucket Digging Force(KN)	7.2	10

Dimensions		
A- Verall Length	2976	3053
B- Overall Width	880	850/1050
C- Overall Height(to top of boom)	1110	1035
D- Overall Height(to top of driving shed)	2225	2458
E- Counterweight Ground Clearance	370	404
F- Min.Ground Clearance	132	120
G- Tail Swing Radius	815	806
H- Track Grounding Length	900	972
J- Track Length	1233	1296
K- Track Gauge	660	670(870)
L- Track Width	840	850-1050
M- Track Shoe Width	180	180

Working Range		
O- Max.Digging Height	2585	3018
P- Max. Dumping Height	1715	2039
Q- Max.Digging Depth	1520	1809
T- Max.Digging Reach	3210	3439
U- Max.Digging Reach at Ground Level	3125	3390
Deflection angle(left/right)	50°/70°	50°/70°
Max.Pushing Height/Depth	146/261	195/195

MXG Machinery assume no responsibility or liability for any errors or omissions in the content of this brochure. Specifications from the manufacturer are subject to change without notice. Refer to our sales team for model details at time of purchase.