



Icematic introduces a new dispenser line, the DI SERIES, which includes two models: DX35, vertical gourmet ice dispenser and TD130 for cubelet shaped ice

FLOOR MODEL

Electric control, touch free ice dispensing system.

Up to 29kg production per 24/hr of gourmet cube.

12kg capacity storage bin.

Stainless steel cabinet.

Cubes drop directly into the consumers glass, with no manipulation.

10 AMP power supply.




ICE PRODUCTION

Air Cooled Unit


Air Temp.	Water Temperature			
°C / °F	32° / 90°	21° / 70°	15° / 60°	10° / 50°
10° / 50°	30	32	34	35
21° / 70°	25	27	29	30
32° / 90°	21	23	24	25
38° / 100°	13	14	15	15

CUBE TYPE



20g
GOURMET CUBE
29 mm Ø x 34 mm H

CONTROL PANEL



BIN CAPACITY

12 Kg

DIMENSIONS

W x D x H (mm)



380 x 513 x 1720



470 x 650 x 1790

OPERATING REQUIREMENTS



220-240/50/1












R134a


MIN		MAX
10° C (50° F)		40° C (104° F)
5° C (41° F)		35° C (95° F)
- 10 %		+ 10 %
1 Bar (14 psi)		5 Bar (70 psi)




SPECIFICATIONS

	 cond	 comp. W	 ABS. W	 Fuse	 kWh/100kg	 L / hr	 kg	 kg
DX35 A		1251	450	10	-	6	62	75



Front View
Vista Frontale

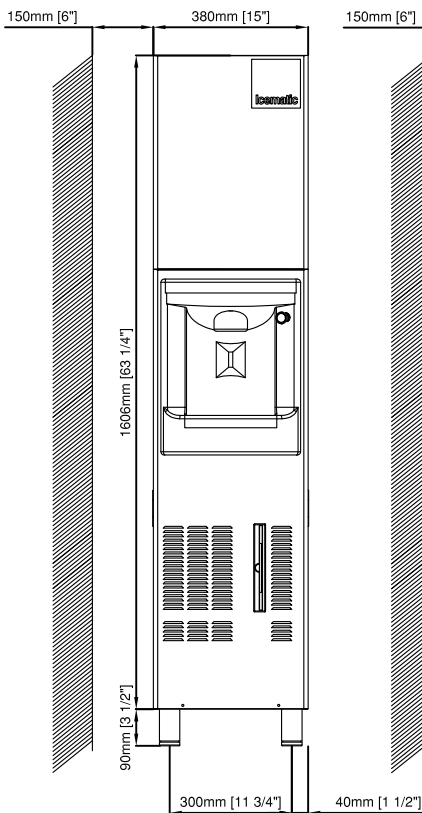


Lateral View
Vista Laterale

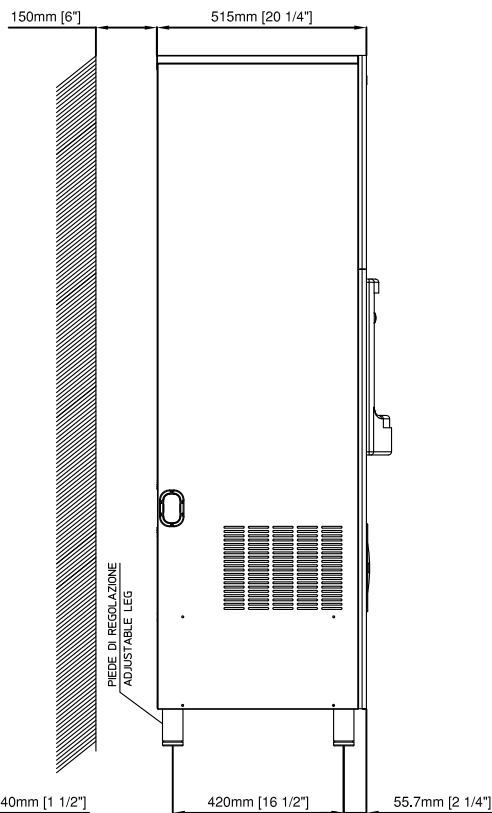

Back View
Vista Posteriore

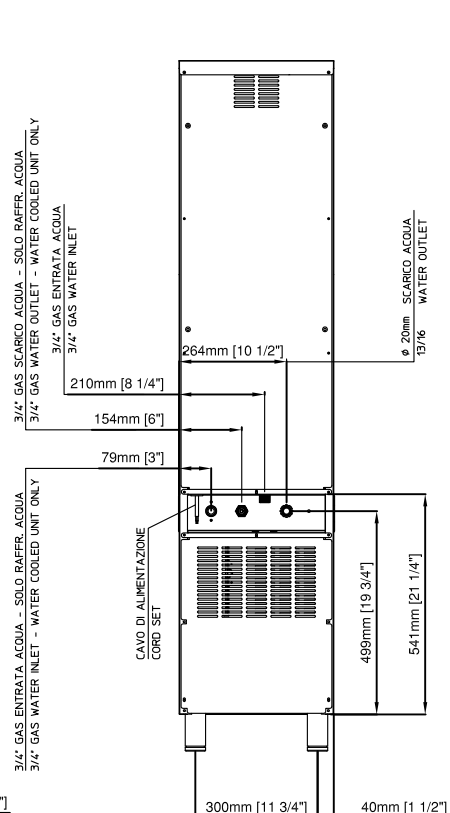

Top View
Vista Superiore

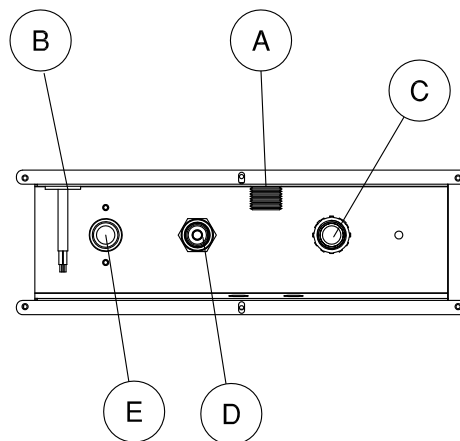

- A** Water inlet connection water condensation 3/4" gas OPTIONAL
- B** Electrical cable supply
- C** Water outlet connection
- D** Water outlet connection water condensation 3/4" gas
- E** Water inlet connection 3/4" gas