





chill index

September 2022



1920 - 2020 - 100 Years Young

www.orford.com.au











Orford Chill Index

Refrigerators—General

Freezer — General

Refrigerator—Specialties

Freezer—Specialties

Underbench / Underbars

Orford FMB20	<u>Page 5</u>
Orford FMB Black	<u>Page 6</u>
Orford FMB30	<u>Page 7</u>
Orford EB20 EcoChill™ Range	Page 8
Orford EB30 EcoChill™ Range	<u>Page 10</u>
Orford EB30 Storage Fridge	<u>Page 11</u>
Orford EB30 Pass Thru Rear Loading	<u>Page 12</u>
Orford EB36 EcoChill™ Range	<u>Page 13</u>
Orford EB36 Pass Thru Rear Loading	<u>Page 14</u>
Orford EB45 EcoChill™ Range	<u>Page 15</u>
Orford EB45 Pass Thru Rear Loading	<u>Page 16</u>
Orford EB EcoChill™ Energy Figures	<u>Page 17</u>
Halo HR350-B Slim Impulse	<u>Page 18</u>
Halo TF85 Impulse counter top	<u>Page 19</u>


Orford VB36L Freezer Page 21 Orford FML Freezer Series Page 22

Orford Flower Fridges 4U	<u>Page 27</u>
Orford Wine Fridges	<u>Page 31</u>
Orford Chocolate Fridges	<u>Page 36</u>
Orford Cake & Bakery Displays	<u>Page 40</u>

Orford FML Ice Merchandiser Page 43

Orford BB Backbar Range	<u>Page 47</u>
Halo KUR Undercounter Refrigerator	<u>Page 51</u>
Halo KUF Undercounter Freezer	<u>Page 52</u>
Halo KURF Undercounter Combos	<u>Page 53</u>

chill index www.orford.com.au www.halorefrigeration.com.au 1300 ORFORD 1300 673 673





Orford Chill Index

Halo Food Services


Halo KRF Fridge/Freezer	<u>Page 57</u>
Halo KR Refrigerator	<u>Page 61</u>
Halo KF Freezer	<u>Page 62</u>
Halo KHR Salad Table	<u>Page 63</u>
Orford Beverage Dispenser s	<u>Page 66</u>

Manitowoc Ice Machines

Manitowoc UG Series Manitowoc Neo U Series Manitowoc Indigo Series Manitowoc Flakers Manitowoc Nugget Machines Manitowoc M Series Manitowoc Accessories Manitowoc Commercial Warranty

<u>Page 86</u>

Page 70










www.orford.com.au www.halorefrigeration.com.au 1300 ORFORD 1300 673 673







fridge -general

4 Back to Index

General Purpose Orford FMB

Contact us for a trade disco Do you have an ABN

N	
0	
-	
٩	
~	
ш	
C	
-	
~	
~	
LI.	

Capacity

Weight

Range

Shelves

Door

MEPS

FMB20—B	Vertical Display Refrigerator
Capacity	557 Litres (Gross)
Dimensions	740W x 791D x 2010H
Weight	165Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	230 - 240v 50Hz. (Standard GPO)
Controller	Digital—Carel controller
	4 Height Adjustable Heavy Duty PVC Coated
Shelves	
	Shelf size : 610w x 450d (mm)
Shelf Adjustment	12mm Increments
	1 x Self Closing, Double Glazed Safety Glass,
Door	Single Heat reflective Low E, Argon filled, Right
	Hand hinged. (Left hand hinge available)
Footings	Heavy Duty Castors 75mm high, Lockable Front
Compressor	Danfoss
Interior Light	LED (on/off switch included) T8 1200mm tube
Refrigerant	R134A
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 5
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted

Vertical Display Refrigerator FMB20-Sn with Illuminated Advertising Sign

Powder Coated galvanized steel Int / Ext White Construction 557Litres (Gross) Dimensions 740W x 791D x 2200H 165Kg 0° - 5° C. **Operating Temp** Ambient Temp 0° - 40° C. **Power Point** 230 - 240v 50Hz. (Standard GPO) Controller **Digital Carel Controller** 4 Height Adjustable Heavy Duty PVC Coated Shelf Adjustment 12mm Increments 1 x Self Closing, Double Glazed Safety Glass, Single Heat reflective Low E, Argon filled, Right Hand hinged. (Door handle on left) Footings Heavy Duty Castors 75mm high, Lockable Front Compressor Danfoss Interior Light LED (on/off switch included) T8 1200mm tube Refrigerant R134A Insulation 50mm Polyurethane, CFC, HCFC, HFC Free **Climate Class** Class 5 Compliant (High Efficiency) **Condenser Filter** Rear mounted Illuminated Adver-200mm High, Top Mounted. tising Sign Sign Illumination LED

Orford FMB20—B RRP: \$2600 + GST



Energy consumed : 5.425 kWh/24hr

Orford FMB20Sn—B

RRP: \$2745 + GST



Energy consumed : 5.589 kWh/24hr

Carel digital controller standard



View this cabinet on display at our 39 Dunhill Crescent, Morningside, Queensland showroom. Phone or text 0418 700 006 for visit times.

Page 5

1300 ORFORD (1300 673 673) +617 4641 7372



FMB20-Sn-B

General Purpose Orford FMB

ontact us for a trade discount Do you have an ABN

FIVIB20-Sn-B	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Int / Ext Black
Capacity	557Litres (Gross)
Dimensions	740W x 791D x 2200H
Weight	165Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	
Power Point	230 - 240v 50Hz. (Standard GPO)
Digital Controller	Digital Carel Controller
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Deer	1 x Self Closing, Double Glazed Safety Glass, Argon filled
Door	Single Heat reflective Low E, Right Hand hinged.
Footings	Heavy Duty Castors, Lockable Front
Compressor	Danfoss
Interior Light	LED (on/off switch included) T8 1200mm tube
Refrigerant	R134A
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 5
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted
Illuminated Advertis-	200mm High, Top Mounted.
Sign Illumination	LED
FMB30-Sn	Vertical Display Refrigerator

rigerator with Illuminated Advertising Sign

Vertical Display Refrigerator

Construction	Powder Coated galvanized steel Int/ Ext Black		
Capacity	889 Litres (Gross)		
Dimensions	1130W x 791D x 2200H		
Weight	210Kg		
Operating Temp	0° - 5° C.		
Ambient Temp Range	0° - 40° C.		
Power Point	230 - 240v 50Hz. (Standard GPO)		
Digital Controller	Digital Carel Controller		
Shelves	8 Height Adjustable Heavy Duty PVC Coated		
Shelf Adjustment	12mm Increments		
_	1 x Self Closing, Double Glazed Safety Glass, Argon filled		
Door	Single Heat reflective Low E, Right Hand hinged.		
Footings	Heavy Duty Castors, Lockable Front		
Compressor	Danfoss		
Interior Light	LED (on/off switch included) T8 1200mm tube		
Refrigerant	R134A		
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free		
Climate Class	Class 5		
MEPS	Compliant (High Efficiency)		
Condenser Filter	Rear mounted		
Illuminated Advertis-	200mm High, Top Mounted.		
Sign Illumination	LED		

Orford FMB20Sn-B—Black RRP: \$2745 + GST



Energy consumed : 5.425

Orford FMB30Sn-B-Black

RRP: \$3408 + GST



Energy consumed : 5.589 kWh/24hr



New with Carel digital controller

Page 6

0

4

~ c Ľ w

- 1300 ORFORD (1300 673 673) +617 4641 7372

382 South St Harristown Queensland 4350 Australia

 \bowtie




General Purpose Orford FMB


FMB30—B	Vertical Display Refrigerator	Orford FMB30—
Construction	Powder Coated galvanized steel Interior /	RRP : \$3265 + G
Capacity Dimensions Weight Operating Temp Ambient Temp Range Power Point Controller Shelves Shelf Adjustment	 889 Litres (Gross) 1130W x 791D x 2010H 210Kg 0° - 5° C. 0° - 40° C. 230 - 240v 50Hz. (Standard GPO) Digital Carel Controller 8 Height Adjustable Heavy Duty PVC Coated 12mm Increments 	
Door	1 x Self Closing, Double Glazed Safety Glass, Single Heat reflective Low E, Argon filled,	
Footings Compressor Interior Light Refrigerant Insulation Climate Class MEPS	Heavy Duty Castors, Lockable Front Danfoss LED (on/off switch included) T8 1200mm tube R134A 50mm Polyurethane, CFC, HCFC, HFC Free Class 5 Compliant (High Efficiency)	C (TATE)
Condenser Filter	Rear mounted	Energy consumed : 7.59 kWh

z 0 _ -٩ ~ ш G -Ľ ш 2

Contact us for a trade discount

Do you have an ABN?







B Models onwards come standard with Carel digital controller



Page 7 <u>Back to Index</u>

1300 ORFORD (1300 673 673) +617 4641 7372

 \bowtie 382 South St Harristown Queensland 4350 Australia



General Purpose Orford FMB

	Vertical Display Refrigerator
FMB30-Sn—B	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Int/ Ext White
Capacity	889 Litres (Gross)
Dimensions	1130W x 791D x 2200H
Weight	210Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	230 - 240v 50Hz. (Standard GPO)
Controller	Digital Carel Controller
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
	1 x Self Closing, Double Glazed Safety Glass,
Door	Single Heat reflective Low E, Argon filled,
	Right Hand hinged.
Footings	Heavy Duty Castors, Lockable Front
Compressor	Danfoss
Interior Light	LED (on/off switch included) T8 1200 mm tube
Refrigerant	R134A
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Climate Class	Class 5
MEPS	Compliant (High Efficiency)
Condenser Filter	Rear mounted
Illuminated Advertising	200mm High, Top Mounted.
Sign	
Sign Illumination	LED

Orford FMB30Sn—B

RRP: \$3408 + GST







Contact us for a trade discount

Do you have an ABN?



Page 8 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au

<u>sales@orrord.com</u>





PlanetSmart[™] **Orford EB Range**

EB20R-Sn **Specifications**

Construction

Dimensions

Power Point

Input Current

Thermometer

Shelf Adjustment

Refrigerated Shelf Area Condensate Disposal

Shelves

Shelves

Door

Drier

Footings Interior Light

Refrigerant

Insulation

Cabinet Classes

Operating Temp Ambient Temp Range

Capacity

Weight

Vertical Display Refrigerator with Illuminated Advertising Sign

Powder Coated galvanized steel

220 - 240v 50Hz. (Standard GPO)

1 Fixed Stainless Steel Base Shelves

Heat reflective Low E, Warm edge, R/H

Right hand hinged with door handle on left Heavy Duty Castors, Lockable Front

50mm Polyurethane, CFC, HCFC, HFC Free

4 Height Adjustable Heavy Duty PVC Coated

Automatic by energy efficient, No Cost, Hot Gas 1 x Self Closing, Double Glazed Safety Glass, Double

Interior / Exterior White

756W x 762D x 2220H

595 Litres (Gross)

12mm Increments

155Kg

0° - 5° C.

0° - 40° C.

2.8 Amps

Digital

1.42 m²

R134a

Solid Core

3M1, 4M1, 5M1

3.43 kWh/24h

Easy front access

Compliant (High Efficiency)

200mm High, Top Mounted

LED, Automatic and manual control

RRP: \$3800 + GST **Orford EB20R-Sn-A**



Energy Consumption

		MEPS				
		* Ene	rgy Coi	nsumpt	ion	
		Cond	enser F	ilter		
				Adverti	sing S	ion
					5116 5	.9.1
		JIBIT	llumina			
z						
0			- 7	56		
-				<u> </u>	+	+
⊢					762	
A					76	
~					-+	1427
-					665	
U U					79	
-				U		- +
~						
-			- 7	56 -		
-		t	<u> </u>	· · ·		
~			n			
			-			
			-transmission			
	2220		-			
	22					
				<u> </u>		

ntact us for a trade discou

Do you have an AB



1300 ORFORD (1300 673 673) +617 4641 7372

382 South St Harristown Queensland 4350 Australia

The Orford Group



756

762

665

427

PlanetSmart[™] Orford EB Storage

EB20R-BLO-A Specifications	Vertical Storage Refrigerator
Construction	Stainless Steel
Capacity	595 Litres (Gross)
Dimensions	756W x 762D x 2220H
Weight	165Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.8 Amps
Thermometer	Digital
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelves	1 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	1.42 m ²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	1 x Self Closing, Block doors
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control T8 1350mm
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	3.43 kWh/24h
Condenser Filter	Easy front access
Sign Illumination	LED, Automatic and manual control

RRP : \$4415 + GST Orford EB20R-Blo-A







Do you have an ABN? Contact us for a trade discoun





1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au





PlanetSmart[™] Orford EB Range

EB30R-Sn	Vertical Display Refrigerator
Specifications	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Interior /Exterior White
Capacity	895 Litres (Gross)
Dimensions	1094W x 762D x 2220H
Weight	210Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.8 Amps
Thermometer	Digital
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	2.17 m ²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	2 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control T8 1350mm
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	4.24 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertising	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control

RRP : \$4324 + GST Orford EB30R-Sn-A





Contact us for a trade discoun

Do you have an ABN?



\$\$ 1300 ORFORD (1300 673 673)
 \$\$ +617 4641 7372
 \$\$ sales@orford.com.au





PlanetSmart[™] Orford EB Storage

EB30R-BLO-A Specifications	Vertical Storage Refrigerator
Construction Capacity Dimensions Weight Operating Temp Ambient Temp Range Power Point Input Current Thermometer Shelves Shelves Shelves Shelf Adjustment Refrigerated Shelf Area Condensate Disposal Door	Stainless Steel 895 Litres (Gross) 1094W x 762D x 2020H 210Kg 0° - 5° C. 0° - 40° C. 220 - 240v 50Hz. (Standard GPO) 2.8 Amps Digital 8 Height Adjustable Heavy Duty PVC Coated 2 Fixed Stainless Steel Base Shelves 12mm Increments 2.17 m ² Automatic by energy efficient, No Cost, Hot Gas 2 x Self Closing, Block doors
Footings Interior Light Refrigerant Cabinet Classes MEPS * Energy Consumption Condenser Filter Sign Illumination	Heavy Duty Castors, Lockable Front LED, Automatic and manual control T8 1350mm R134a 3M1, 4M1, 5M1 Compliant (High Efficiency) 4.24 kWh/24h Easy front access LED, Automatic and manual control

RRP : \$4800 + GST Orford EB30R-Blo-A







Page 12 Back to Index

ERATION

c

_

REFR

 \sqrt{s}
 1300 ORFORD (1300 673 673)

 (e)
 +617 4641 7372

 (e)
 sales@orford.com.au

382 South St Harristown Queensland 4350 Australia



Do you have an ABN? Contact us for a trade discoun



Orford EB Rear Loading Range

Construction Powder Coated galvanized steel Capacity 895 Litres (Gross) Dimensions 1094W x7620 x 2220H Weight 210Kg Operating Temp 0' - 5' C. Ambient Temp Range 0' - 40' C. Power Point 220 - 240 x 50Hz. (Standard GPO) Input Current 2.8 Amps Thermometer Digital Shelves 8 Height Adjustable Heavy Duty PVC Coated Shelves 2 Fixed Stainless Steel Base Shelves Shelf Adjustment 22m Intramente 2 x Self Closing, Double Glazed Safety Glass, Door + Rear doors Double Heat reflective Low E, Warm edge 2 x Self Closing, Double Glazed Safety Glass, Footings Heavy Duty Castors, Lockable Front Interior Light LED, Automatic and manual control. T8 Refrigerant R134a Drier Solid Core Insulation SOmm Polyurethane, CFC, HCFC, HFC Free Cabinet Classes 3M1, 4M1, 5M1 MEPS Compliant (High Efficiency) * Energy Consumption 4.74 kWh/2Ah Condenser File front access Illuminated Advertising 200mm High, Top Mounted Sien Illumination LED. Automatic and manual control 1000 1	EB30R-Sn-PT Specifications	Rear Loading Display Refrigerator with Illuminated Advertising Sign	RRP : \$4622 + GST
Dimensions 1094W x 762D x 2220H Weight 2005 Operating Temp 0'-5° C. Ambient Temp Range 0'-40° C. Power Point 220 - 240v 50Hz. (Standard GPO) Input Current 228 Amps Thermometer Digital Shelves 2 Fixed Stainless Steel Base Shelves Shelves 2 Fixed Stainless Steel Base Shelves Double Heat reflective Low E, Warm edge 2 X Self Colsing Double Giazed Safety Glass, Door + Rear doors Double Heat reflective Low E, Warm edge 2 X Self Colsing Double Giazed Safety Glass, Door + Rear doors Double Heat reflective Low E, Warm edge 2 X Self Colsing Double Giazed Safety Glass, Door + Rear doors Double Heat reflective Low E, Warm edge 2 X Self Colsing Double Giazed Safety Glass, Door + Rear doors Double Heat reflective Low E, Warm edge 2 X Self Colsing Double Giazed Safety Glass, Door + Rear doors Double Heat reflective Low E, Warm edge 2 X Self Colsing Double Giazed Safety Glass, Door + Rear doors Double Heat reflective Low E, Warm edge 2 X Self Colsing Double Glazed Safety Glass, Door + Rear doors Double Heat reflective Low E, Warm edge 2 X Self Colsing Double Glazed Safety Glass, Door + Rear doors Dom Polyurethane, CFC, HCFC, HFC Free Cabinet Classes SMI (High Efficiency) * Energy Consumption 1000 Immination EED. Automatic and manual control Imminated Advertising 200mm High, Top Mounted Sign Illumination EED. Automatic and manual control 1000 Immination Immination	Construction	Powder Coated galvanized steel	Orford EB30R-Sn-A-PT
Door + Rear doors Double Heat reflective Low E, Warm edge 2 x Self closing powdercoated doors Footings Heavy Duty Castors, Lockable Front Interior Light LED, Automatic and manual control. T8 Refrigerant R134a Drier Solid Core Insulation Solm Polyurethane, CFC, HCFC, HFC Free Cabinet Classes 3M1, 4M1, 5M1 Compliant (High Efficiency) 4.74 kWh/24h Condenser Filter Easy front access Illuminated Advertising 200mm High, Top Mounted Sign Illumination LED, Automatic and manual control IVP Protected by AUS DSN no 345317 8 Patent NO 2013100761 Image: Solid Core Image: Solid Core Sign Illumination LED, Automatic and manual control IVP Protected by AUS DSN no 345317 Image: Solid Core Image: Solid Core Sign Illumination LED, Automatic and manual control IVP Protected by AUS DSN no 345317 Image: Solid Core Image: Solid Core Image: Solid Core	Capacity Dimensions Weight Operating Temp Ambient Temp Range Power Point Input Current Thermometer Shelves Shelves	895 Litres (Gross) 1094W x 762D x 2220H 210Kg 0° - 5° C. 0° - 40° C. 220 - 240v 50Hz. (Standard GPO) 2.8 Amps Digital 8 Height Adjustable Heavy Duty PVC Coated 2 Fixed Stainless Steel Base Shelves 12mm Increments	
Footings Heavy Duty Castors, Lockable Front Interior Light LED, Automatic and manual control. T8 Refrigerant R134a Drier Solid Core Insulation SOmm Polyurethane, CFC, HCFC, HFC Free Cabinet Classes 3M1, 4M1, 5M1 Compliant (High Efficiency) 4.74 kWh/24h Condenser Filter Easy front access Illuminated Advertising 200mm High, Top Mounted Sign Illumination LED. Automatic and manual control IP Protected by AUS DSN no 345317 & Patent NO 2013100761 IP Protected by AUS DSN no 345317 & Patent NO 2013100761	Door + Rear doors	-	
Refrigerant Drier Insulation Cabinet Classes MI, 4M1, 5M1 Compliant (High Efficiency) 4.74 kVh/24h Easy front access Illumination LED. Automatic and manual control IP Protected by AUS DSN no 345317 8 Patent NO 2013100761	Footings		
Drier Solid Core Insulation SOmm Polyurethane, CFC, HCFC, HFC Free Cabinet Classes 3M1, 4M1, 5M1 MEPS Compliant (High Efficiency) 4.74 KWh/24h Condenser Filter Easy front access Illuminated Advertising 200mm High, Top Mounted Sign Illumination LED. Automatic and manual control IP Protected by AUS DSN no 345317 8 Patent NO 2013100761 Protected by AUS DSN no 345317 8 Patent NO 2013100761 Protected by AUS DSN no 345317 8 Patent NO 2013100761 Compliant Compliant	Interior Light	LED, Automatic and manual control. T8	C (run
Illuminated Advertising 200mm High, Top Mounted Sign Illumination LED. Automatic and manual control	Drier Insulation Cabinet Classes MEPS * Energy Consumption	Solid Core 50mm Polyurethane, CFC, HCFC, HFC Free 3M1, 4M1, 5M1 Compliant (High Efficiency) 4.74 kWh/24h	
Sign Illumination 194 197 197 197 197 197 197 197 197			
A Patent NO 2013100761	Sign Illumination		
		& Patent NO 2013100761	

Do you have an ABN?



Page 13 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au





PlanetSmart[™] Orford EB Range

EB36R-Sn			
	Vertical Display Refrigerator with Illuminated Advertising Sign	RRP : \$4	1786 + GST
Specifications	with multimated Adventising Sign	Orford F	B36R-Sn-A
Construction	Powder Coated galvanized steel		.D30K-311-A
Capacity	1071 Litres (Gross)		
Dimensions	1286W x 762D x 2220H		
Weight	221Kg		
Operating Temp	0° - 5° C.	and the second	
Ambient Temp Range	0° - 40° C.	PROTECTION	
Power Point	220 - 240v 50Hz. (Standard GPO)	Contraction of Contraction	
Input Current	2.9 Amps		
Thermometer	Digital		
Shelves	8 Height Adjustable Heavy Duty PVC Coated	terrin ringhause i	
Shelves	2 Fixed Stainless Steel Base Shelves		
Shelf Adjustment	12mm Increments		
Door	2 x Self Closing, Double Glazed Safety Glass,	the second se	
	Double Heat reflective Low E, Warm edge		
Footings	Heavy Duty Castors, Lockable Front		
Interior Light	LED, Automatic and manual control T8		
Refrigerant	R134a		-
Drier	Solid Core	States and a	
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free		
Cabinet Classes MEPS	3M1, 4M1, 5M1 Compliant (High Efficiency)		
* Energy Consumption	4.74 kWh/24h		
Condenser Filter	Easy front access	122000	
Illuminated Advertising	200mm High, Top Mounted		
Sign Illumination	LED, Automatic and manual control	•	
- 1286	-	_	
762	IP Protected by AUS DSN no 345317	Orford Group	Energy Consumption
<u>13</u>	& Patent NO 2013100761		Lifeigy consumption
		EB Model	@3M1 kWh/24hr
254			
	That Morks		4 30
- 1286		EB36R-A	4.28
		36R-SN-A with	A 7A
	l	uminated sign	4.74
(e)			
	762	Plan	etsmart

Do you have an ABN?



Page 14 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au

www.orford.com





Orford EB Rear Loading Range

EB36R-Sn-PT Specifications	Rear Loading Display Refrigerator with Illuminated Advertising Sign	RRP : \$5193 + GST
Construction	Powder Coated galvanized steel	Orford EB36R-Sn-A-PT
Capacity Dimensions Weight	1071 Litres (Gross) 1286W x 762D x 2220H 221Kg	
Operating Temp Ambient Temp Range Power Point	0° - 5° C. 0° - 40° C. 220 - 240v 50Hz. (Standard GPO)	
Input Current Thermometer Shelves Shelves	2.9 AmpsDigital8 Height Adjustable Heavy Duty PVC Coated2 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments 2 x Self Closing, Double Glazed Safety Glass,	
Door + Rear doors	Double Heat reflective Low E, Warm edge 2 x Self closing powdercoated doors	
Footings Interior Light	Heavy Duty Castors, Lockable Front LED, Automatic and manual control. T8	
Refrigerant Drier Insulation	R134a Solid Core 50mm Polyurethane, CFC, HCFC, HFC Free	
Cabinet Classes MEPS * Energy Consumption Condenser Filter	3M1, 4M1, 5M1 Compliant (High Efficiency) 4.74 kWh/24h Easy front access	
Illuminated Advertising Sign Illumination	200mm High, Top Mounted LED, Automatic and manual control	
1286	P Protected by AUS DSN no 345317 & Patent NO 2013100761	
354	that works	
		Planetsmart

Do you have an ABN? Contact us for a trade discount



Page 15 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 <u>sales@orford.com.au</u>

382 South St Harristown Queensland 4350 Australia



PlanetSmart[™] Orford EB Range

	EB45R-Sn Specifications	Vertical Display Refrigerator with Illuminated Advertising	Sign	-	5907 + GST EB45R-Sn-A
	Construction	Powder Coated galvanized steel		Oriora	ED45K-511-A
	Capacity Dimensions Weight Operating Temp Ambient Temp Range Power Point Input Current Thermometer Shelves Shelves Shelves Shelf Adjustment Refrigerated Shelf Area Condensate Disposal Door Footings Interior Light Refrigerant Cabinet Classes MEPS * Energy Consumption Condenser Filter Illuminated Advertising Sign Illumination	1384 Litres (Gross) 1640W x 762D x 2220H 265 Kg 0° - 5° C. 0° - 40° C. 220 - 240v 50Hz. (Standard GPO) 3.2 Amps Digital 12 Height Adjustable Heavy Duty PV 3 Fixed Stainless Steel Base Shelves 12mm Increments 3.38 m ² Automatic by energy efficient, No C 3 x Self Closing, Double Glazed Safet Double Heat reflective Low E, Warm Heavy Duty Castors, Lockable Front LED, Automatic and manual control R134a 3M1, 4M1, 5M1 Compliant (High Efficiency) 6.03 kWh/24h Easy front access 200mm High, Top Mounted LED, Automatic and manual control	Cost, Hot Gas ty Glass, n edge . T8		
•	762	IP Protected by AUS DSN no 345317 & Patent NO 2013100761	The Orford G		Energy Consumption
R A 1			EB Mode		@3M1 kWh/24hr
	- 1640		EB45R-A	L .	5.45
ж на стана и на стана и И на стана и			EB45R-SN-A illuminated		6.03
				REFRI Plan	GERATION etsmart

Do you have an ABN? Contact us for a trade discount¹



Page 16 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 <u>sales@orford.com.au</u>





Orford EB Rear Loading Range

EB45R-Sn-PT **Specifications**

Rear Loading Display Refrigerator with Illuminated Advertising Sign

Contact us for a trade discount Do you have an ABN?




Construction	Powder Coated galvanized steel
Capacity	1384 Litres (Gross)
Dimensions	1640W x 762D x 2220H
Weight	265 Kg
Operating Temp	0° - 5° C. 0° - 40° C.
Ambient Temp Range Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	3.2 Amps
Thermometer	Digital
Shelves	12 Height Adjustable Heavy Duty PVC Coated
Shelves	3 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	3.38 m ²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas 3 x Self Closing, Double Glazed Safety Glass,
	Double Heat reflective Low E, Warm edge
Door	Double fleat reflective Low L, waith Euge
	3 x Self closing powder coated rear doors
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control. T8
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption Condenser Filter	6.03 kWh/24h Easy front access
Illuminated Advertising	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control
458 762	
- 1640	745
	+

RRP: \$6480 + GST **Orford EB45R-Sn-PT**









IP Protected by AUS DSN no 345317 & Patent NO 2013100761



1300 ORFORD (1300 673 673) +617 4641 7372





Planetsmart™ Orford

Orford EB Range Energy Figures

The Orford Group Patented EB Model	Energy Consumption @ 3M1 kWh/24hr	Running Cost based on power at .28c per kW
EB20R-A	3.17	3.17 @ .28c = .89c per day = \$324.84 per annum
EB20R-Sn-A (with sign box)	3.43	3.43 @ .28c = .96c per day = \$350.40 per annum
EB30R-A	3.78	3.78 @28c = \$1.06c per day = \$386.90 per annum
EB30R-Sn-A (with sign box)	4.24	4.24 @28c = \$1.19 per day = \$434.35 per annum
EB36R-A	4.28	4.28 @ 28c = \$1.20 per day = \$428.00 per annum
EB36R-Sn-A (with sign box)	4.74	4.74 @ 28c = \$1.33 per day = \$485.45 per annum
EB45R-A	5.45	5.45 @ 28c = \$1.53 per day = \$558.45 per annum
EB45R-Sn-A (with sign box)	6.03	6.03 @28c = \$1.69 per day = \$616.85 per annum

Contact us for a trade discoun

Do you have an ABN?









1920 - 2020 - 100 Years Young

technology that works







IP Protected by AUS DSN no 345317 & Patent NO 2013100761

Page 18 <u>Back to Index</u>

- 🜭 1300 ORFORD (1300 673 673) 🎯 +617 4641 7372
- <u>sales@orford.com</u>





Halo HR350 Slim

<u>Contact us for a trade discoun</u> Do you have an ABN



Halo HR350-B Slim **RRP \$ 1650 + GST**

The Halo HR 350—B Slim offers eye catching appeal to Increase impulse sales. A versatile and energy efficient solution for your cooling requirements.

Quiet enough for Commercial or Domestic application

www.orford.com.au for specification sheet

Elegant Slim-lined styled, display refrigerator for storage and impulse merchandising

White in colour with Cool Grey Trim

- Strong well constructed body
- LED light, offering, long life, brilliant merchandising, stunning product visibility and energy savings
- Dixell controller with dust cover protects small fingers
- Low Global Warming Refrigerant R600a
- Lockable self closing doors
- Independent light switches for internal light and signbox

View this cabinet on display at our 39 Dunhill Crescent, Morningside, Queensland showroom. Phone or text 0418 700 006 for visit times.



z

0 _



Specifications	Slim Impulse HR350-B Display			
	Fridge			
Brand	Halo			
Model	HR350-В			
Maximum Ambient Temp	35°C (Perishables in maximum 25°C air condi- tioning)			
Temp Range	+1°C to +10°C			
Capacity /L	339 Litres			
Refrigerant	R600a			
External Dims in mm	640 w x 670 d x 1940 h			
Internal Dims in mm	530 w x 430 d x 1205 h			
Thermometer	Dixell Electronic Controller with dust cover			
Shelves	4 adjustable shelves with rear product stop and front ticket stripping			
Door	1 swing door hinged on the right with lock			
Footings	4 x castors			
Interior Light	Single LED light			
Weight	75kg			
Light switches	Separate light box switch and cabinet light switch			
Power Point	10Amp GPO			
Input power	1.84 kW/24h			

Page 19





382 South St

Harristown Queensland 4350 Australia



halo



Halo TF85 Impulse



0418 700 006 for visit times.

Halo® TF-85 Countertop Fridge **RRP \$900 + GST**

The Halo TF-85 counter top offers eye catching appeal to increase impulse sales. A versatile and energy efficient solution for your cooling requirements.

www.orford.com.au

Certificate of Suitability No : AZ 69023706

 Features Elegant Slim-line styled, Reach-in 	Halo TF-85 Specifications	Countertop Impulse Refrigerator
 Display Fridge for Storage and Merchandising Strong well-constructed body LED Light, offering, Long life, 	Construction Capacity	Powder Coated galvanized steel Interior / Exterior White 85 Ltr 505 w x 590 d x 780 H External
brilliant merchandising, stunning product visibility and energy	Dimensions	410 w x 395 d x 625 H Internal Decal size : 455w x 715h. Glass area 426h (mm)
 savings. Energy efficient, self-closing glass door 	Weight Operating Temp Ambient Tempera-	35 kg 0° - 10° C. 32° C.
 Plug and Use—power requirements Standard 10 Amp. Power point 	ture Power Point Thermometer	32 C. 220 - 240v 50Hz. (Standard GPO) Mechanical thermometer control
 Low Global Warming Refrigerant R600a adding a new dimension to 	Shelves Condensate Disposal Door	3 Height Adjustable Heavy Duty PVC Coated Automatic by energy efficient, No Cost, Hot Gas 1 x Safety Glass, With door locks
 environmental efficiency. Easy grip integrated handle 	Footings Interior Light Refrigerant	2 adjustable feet at front and 2 rollers at the back LED (on/off switch included) R600a
View this cabinet on display at our 39 Dunhill Crescent, Morningside, Queensland showroom, Phone or text	Insulation Power Supply	Polyurethane, CFC, HCFC, HFC Free 1 x 10 AMP





Page 20

1300 ORFORD (1300 673 673) +617 4641 7372



freezer -general






VB36L-Sn-A

Sign Illumination

Orford VB Freezer

ntact us for a trade discou Do you have an ABN

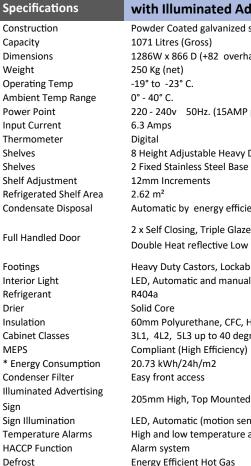

Vertical Display Ice Freezer with Illuminated Advertising Sign Powder Coated galvanized steel Interior /Exterior White 1286W x 866 D (+82 overhang = 952mm total) x 2215H (mm) 220 - 240v 50Hz. (15AMP power outlet) 8 Height Adjustable Heavy Duty PVC Coated 2 Fixed Stainless Steel Base Shelves Automatic by energy efficient, No Cost, Hot Gas 2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E, Warm edge with removable


Heavy Duty Castors, Lockable Front LED. Automatic and manual control 60mm Polyurethane, CFC, HCFC, HFC Free 3L1, 4L2, 5L3 up to 40 degree Celsius ambient Compliant (High Efficiency)

LED, Automatic (motion sensor control) and manual control High and low temperature alarms **Energy Efficient Hot Gas**

LED, Automatic and manual control

FREEZERS **Orford VB36L-Sn-A Freezer** RRP : \$8885 + GST



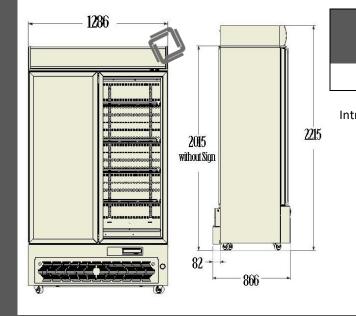

The Orford Group VB Freezer Model	Energy Consumption @3L1 kWh/24hr			
VB36L-Sn-A	20.73			
roducing the 2016 Orford Bottom Mount VB36L-Sn-A Freez- er with a removable package.				
Matches the O	rford EB Range			

100% designed by the Orford Engineering Team

Patent Protected in Australia & New Zealand



Page 22

z

0 _ 4 ~ u. c

_

2

ш, Ľ

> 1300 ORFORD (1300 673 673) +617 4641 7372





The Orford FML Freezer Series

Present your frozen food beautifully to your customer with the



<u>Contact us for a trade discou</u>

z

°

H

r e f r i g e r a

Do you have an ABN

The Orford FML50 is available in R290 Refrigerant.

Orford FML Freezer Series Available in 1 door, 2 door and 3 door

What is R290 Refrigerant? R290 is natural, non-toxic and free of ozonedepleting properties with a low GWP Global Warming Potential.



The Future is Now













View this cabinet on display at our 39 Dunhill Crescent, Morningside, Queensland showroom. Phone or text 0418 700 006 for visit times.



Model	Temp	Doors	Net Volume	Shelves	Dimensions	RRP Price	
FML-20	-18 to –22	1	560	5	750 w x 760 d x 2039 h	\$4275 + GST	
FML-30	-18 to –22	2	960	10	1253 w x 760 d x 2039 h	\$5567 + GST	
FML-50	-18 to –22	3	1480	15	1880 w x 760 d x 2039 h	\$6920 + GST	

Page 23 Back to Index

- I300 ORFORD (1300 673 673)
 ★617 4641 7372
- sales@orford.com.au
- www.orford.com.





The Orford FML Freezer Series



Orford Freezer FML20	Vertical Display Freezer
Specifications	
Construction	Powder Coated galvanized steel Interior /Exterior White standard (black optional, check
FML-20	1 DOOR FREEZER
Capacity	560 Litres (gross)
Dimensions	750 w x 760 D x 2039 H (B models post 2022 stock) with new higher ezyglide castors)
Weight	150kg (net)
Temp	-18c—-22c
Doors	1 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E,.
Ambient temp Weight Power Point * Energy Consumption	Hinged to the LEFT. With door handle on the RIGHT 32c degrees 166 Kg (net) 220—240v (1 x 10 AMP powerpoint) 12.7 kWh/24h/m2
Common Specifications	FML20 / FML30 / FML50
Compressor	Danfoss
Thermometer	Digital Elitech Controller
Shelves per door	5 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment Condensate Disposal Footings	12mm Increments Automatic by energy efficient, No Cost, Hot Gas Heavy Duty 2.5mm Ezy Roll Castors, Lockable Front
Interior Light	LED light with light switch
Refrigerant Drier	R290 Natural Refrigerant (B models onwards) Solid Core to suit
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	
Condenser Filter	Easy front access
Drip Tray Evaporation	
Method	Hot Gas
Kick Panel	Easy unclip and remove system
Defrost	Energy Efficient Hot Gas
Compliance	MEPS, EMC,

Orford FML-20-B Freezer

RRP \$4275 + GST







Page 24 Back to Index

Contact us for a trade discoun

ERATION

REFRIG

Do you have an ABN?





The Orford FML Freezer Series





Orford Freezer FML30	2 Door Vertical Display Freezer	Orford FML-30-B Freeze
Specifications		RRP \$5567 + GST
Construction	Powder Coated galvanized steel Interi- or /Exterior White	
FML-30	2 DOOR FREEZER	
Capacity	930 Litres (gross)	
Dimensions	1253 w x 760 D x 2039 H (mm)	
Weight	240 kg (net)	
Doors	2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E,	
Temp	-18—-22c degrees	
Ambient Temperature	32 degrees	17
Power Point	1 x 15 AMP plug	
* Energy Consumption	22.4 kWh/24h/m2	
Common Specifications	FML20 / FML30 / FML50	
Compressor	Danfoss	
Thermometer	Digital Elitech Controller	and a set
Shelves per door	5 Height Adjustable Heavy Duty PVC Coated	
Shelf Adjustment	12mm Increments	
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas	
Footings	Heavy Duty 2.5mm Ezy Roll Castors, Lockable Front	
Interior Light	LED light	
Refrigerant	R290 Natural Refrigerant (B models onwards)	
Drier	Solid Core	
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free	
Cabinet Classes		
Condenser Filter	Easy front access	
Drip Tray Evaporation	Hot Gas	
Method		
Kick Panel	Easy unclip and remove system	
Defrost	Energy Efficient Hot Gas	
Compliance	MEPS, EMC,	



1300 ORFORD (1300 673 673) +617 4641 7372

382 South St \bowtie Harristown Queensland 4350 Australia



Contact us for a trade discoun Do you have an ABN?



Page 25

Back to Index



The Orford FML Freezer Series





Orford Freezer FML-50	3 Door Vertical Display Freezer	
Specifications		
Construction	Powder Coated galvanized steel Interior /Exterior White	
FML-50-B	3 DOOR FREEZER	
Capacity	1450 Litres (gross)	
Dimensions	1880 w x 760 D x 2039 H (mm)	
Weight	305 kg (net)	
Doors	3 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E,	
* Energy Consumption	34.3 kWh/24h/m2	
Operating Temp	-18° to -22° C.	
Ambient Temp Range	32 degrees	
Power Point	220 - 240v 50Hz. (1 x 15 AMP power outlet)	
Compressor	Danfoss	
Digital Controller	Digital Carel Controller	
Shelves per door	5 Height Adjustable Heavy Duty PVC Coated	
Shelf Adjustment	12mm Increments	
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas	
Footings	Heavy Duty 2.5mm Ezy Roll Castors, Lockable Front	
Interior Light	LED light	
Refrigerant	R290 Natural Refrigerant (B models onwards)	
Drier	Solid Core	
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free	
Cabinet Classes	3L1	
Condenser Filter	Easy front access	
Drip Tray Evaporation Method	Hot Gas	
Kick Panel	Easy unclip and remove system	
Defrost	Energy Efficient Hot Gas	
Compliance	MEPS, EMC,	
Orford Website Link	www.orford.com.au	
Specification Sheet	FML50-B spec sheet	

Orford FML50-B Freezer

With R290 Refrigerant

RRP \$6920 + GST



Contact us for a trade discoun

Do you have an ABN?





Page 26 Back to Index 1300 ORFORD (1300 673 673) +617 4641 7372





Orford EB Flower Fridges

-44AD

EB30R-Sn-Flower Specifications

Vertical Flower Refrigerator with Illuminated Advertising Sign

Flower Cabinet	Designed to extend the shelf life of fresh flowers
Capacity	895 Litres (Gross)
Dimensions	1094W x 762D x 2220H
Weight	210Kg
Florist Benefits	Temperature Management for flowers
Colours	Ebony Black, and Snow White
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.9 Amps
Thermometer	Digital
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Door	2 x Self Closing, Double Glazed Safety Glass,
DOOL	Double Heat reflective Low E, Warm edge
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	4.24 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertis-	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control

RRP : \$4324 + GST Orford EB30R-Sn-A-Flower



Daily running costs based on power costs of .28c per kW

- \$1.20 per day with sign box off
 - \$1.33 per day with sign box on



For more information on the Orford Group flower Range including features & benefits refer to

www.flowerfridges4u.com.au

382 South St Harristown Queensland 4350 Australia



Do you have an ABN? Contact us for a trade discour





1094

Page 28 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au



Orford EB Flower Fridges

-44AD

EB36R-Sn-Flower **Specifications**

Vertical Flower Refrigerator with Illuminated Advertising Sign

Flower Cabinet	Designed to extend the shelf life of fresh flow- ers
Capacity	1071 Litres (Gross)
Dimensions	1286W x 762D x 2220H
Weight	
Florist Benefits	221Kg
	Temperature Management for flowers
Colours	Ebony Black, and Snow White
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.9 Amps
Thermometer	Digital
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Door	2 x Self Closing, Double Glazed Safety Glass,
	Double Heat reflective Low E, Warm edge
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	4.74 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertis-	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control

RRP: \$4786 + GST **Orford EB36R-Sn-A-Flower**



Daily running costs based on power costs of .28c per kW

- \$1.20 per day with sign box off
- \$1.33 per day with sign box on



For more information on the Orford Group flower Range including features & benefits refer to


www.flowerfridges4u.com.au

382 South St Harristown Queensland 4350 Australia



Contact us for a trade discou Do you have an ABN





1286

Page 29

1300 ORFORD (1300 673 673) +617 4641 7372

Orford EB Flower Fridges

EB45R-Sn-Flower Specifications

Vertical Flower Refrigerator with Illuminated Advertising Sign

Flower Cabinet Capacity Dimensions Weight **Florist Benefits** Colours **Power Point** Input Current Thermometer Shelves Shelves Shelf Adjustment Door Footings Interior Light Refrigerant **Cabinet Classes** MEPS * Energy Consumption **Condenser Filter** Illuminated Advertising Sign Illumination


Designed to extend the shelf life of fresh flowers 1384 Litres (Gross) 1640W x 762D x 2220H 265 Kg **Temperature Management for flowers** Ebony Black, and Snow White 220 - 240v 50Hz. (Standard GPO) 3.2 Amps Digital 12 Height Adjustable Heavy Duty PVC Coated 3 Fixed Stainless Steel Base Shelves 12mm Increments 3 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge Heavy Duty Castors, Lockable Front LED, Automatic and manual control R134a 3M1, 4M1, 5M1 Compliant (High Efficiency) 6.03 kWh/24h Easy front access 200mm High, Top Mounted LED, Automatic and manual control

RRP : \$5907 + GST EB45R-Sn-A-Flower



Daily running costs based on power costs of .28c per kW

- \$1.53 per day with sign box off
 - \$1.69 per day with sign box on



1640

762

458

1220

z o

RA

R – G 745

762

IP Protected by AUS DSN no 345317

& Patent NO 2013100761



For more information on the Orford Group flower Range including features & benefits refer to

www.flowerfridges4u.com.au

Page 30 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au

382 South St Harristown Queensland 4350 Australia



Do you have an ABN? Contact us for a trade discou



- CALINA

The Orford Flower Fridge Range now comes in a Rear Loading version.

Position your Flower Fridge next to your counter allowing customers to access from the front doors while you continue to restock from the rear doors

RRP : \$4622 + GST Orford EB30R-Sn-Flower- Pass Thru RRP : \$5193 + GST Orford EB36R-Sn-Flower- Pass Thru RRP : \$6480 + GST EB45R-Sn-Flower– Pass Thru















Flower Fridges 4 U



For more information on the Orford Group flower Range including features & benefits refer to

www.flowerfridges4u.com.au

Page 31 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au

382 South St Harristown Queensland 4350 Australia



Do you have an ABN? Contact us for a trade discoun



Economy Wine Range

FMB20-Sn-Wine

Contact us for a trade discount Do you have an ABN?

	with Illuminated Advertising Sign	
Construction	Powder Coated galvanized steel Int / Ext White	
Capacity	557Litres (Gross)	
Dimensions	740W x 791D x 2200H	
Weight	165Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	230 - 240v 50Hz. (Standard GPO)	
Thermometer	Digital Carel Controller	
Shelves	4 Height Adjustable Heavy Duty PVC Coated	
Shelf Adjustment	12mm Increments	
Door	Self Closing, Double Glazed Safety Glass, Argon filled	
DUUI	Single Heat reflective Low E, Right Hand hinged.	
Footings	Heavy Duty Castors, Lockable Front	
Compressor	Danfoss	
Interior Light	LED (on/off switch included)	
Refrigerant	R134A	
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free	
Climate Class	Class 5	
MEPS	Compliant (High Efficiency)	
Condenser Filter	Rear mounted	
Illuminated Advertising	200mm High Ton Mounted	
Sign	200mm High, Top Mounted.	
Sign Illumination	LED	

Vertical Display Refrigerator

FMB30-Sn-Wine

	with Illuminated Advertising Sign	
Construction	Powder Coated galvanized steel Int/ Ext White	
Capacity	889 Litres (Gross)	
Dimensions	1130W x 791D x 2200H	
Weight	210Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	230 - 240v 50Hz. (Standard GPO)	
Thermometer	Digital Carel Controller	
Shelves	8 Height Adjustable Heavy Duty PVC Coated	
Shelf Adjustment	12mm Increments	
Door	Self Closing, Double Glazed Safety Glass, Argon filled	
DOOI	Single Heat reflective Low E, Right Hand hinged.	
Footings	Heavy Duty Castors, Lockable Front	
Compressor	Danfoss	
Interior Light	LED (on/off switch included)	
Refrigerant	R134A	
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free	
Climate Class	Class 5	
MEPS	Compliant (High Efficiency)	
Condenser Filter	Rear mounted	
Illuminated Advertising	200mm High, Top Mounted.	
Sign	zoomin nigh, rop wounted.	
Sign Illumination	LED	

Vertical Display Wine Refrigerator

Orford FMB20Sn-wine RRP: \$2745 + GST



Orford FMB30Sn-Wine RRP: \$3408 + GST



Page 32

z

0 _

-

٩

~ ш

c

_

Ľ

u.

~

> 1300 ORFORD (1300 673 673) +617 4641 7372

382 South St Harristown Queensland 4350 Australia

 \bowtie






EB20R-Sn-Wine

Specifications

ntact us for a trade discou Do you have an ABI

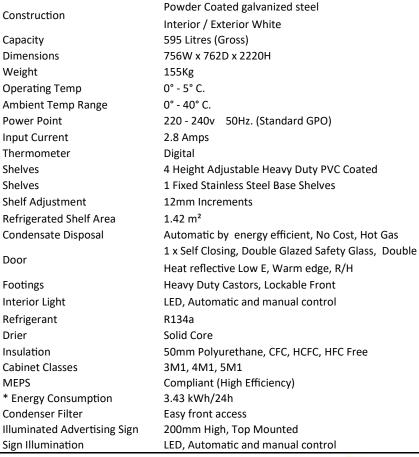

Vertical Display Wine Refrigerator with Illuminated Advertising Sign

RRP: \$3800 + GST Orford EB20R-Sn-A-Wine





IP Protected by AUS DSN no 345317 & Patent NO 2013100761



The Orford Group
EB20 Wine Cabinet

Energy Consumption @3M1 kWh/24hr

EB20R-SN-A with sign

3.43



1300 ORFORD (1300 673 673) +617 4641 7372

382 South St Harristown Queensland 4350 Australia

 \bowtie





EB30R-Sn-wine Specifications

Vertical Wine Display Refrigerator with Illuminated Advertising Sign

Construction
Capacity
Dimensions
Weight
Operating Temp
Ambient Temp Ra
Power Point
Input Current
Thermometer
Shelves
Shelves
Shelf Adjustment
Refrigerated Shel
Condensate Dispo
Door
Footings
Interior Light
Refrigerant
Cabinet Classes
MEPS
* Energy Consum
Condenser Filter

Contact us for a trade discount

z

0

_ -4

~ ш c _ Ľ Line, u. 2

Do you have an ABN?

Construction	Powder Coated galvanized steel	
construction	Interior /Exterior White	
Capacity	895 Litres (Gross)	
Dimensions	1094W x 762D x 2220H	
Weight	210Kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	2.8 Amps	
Thermometer	Digital	
Shelves	8 Height Adjustable Heavy Duty PVC Coated	
Shelves	2 Fixed Stainless Steel Base Shelves	
Shelf Adjustment	12mm Increments	
Refrigerated Shelf Area	2.17 m ²	
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas	
Door	2 x Self Closing, Double Glazed Safety Glass,	
DOOI	Double Heat reflective Low E, Warm edge	
Footings	Heavy Duty Castors, Lockable Front	
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consumption	4.24 kWh/24h	
Condenser Filter	Easy front access	
Illuminated Advertising	200mm High, Top Mounted	

Sign Illumination








LED, Automatic and manual control

t works









The Orford Group EB Model	Energy Consumption @3M1 kWh/24hr
EB30R-SN-A with sign	4.24

Page 34

1300 ORFORD (1300 673 673) +617 4641 7372

 \bowtie 382 South St Harristown Queensland 4350 Australia



EB36R-Sn-Wine **Specifications**

Wine Cabinet Capacity

Vertical Wine Refrigerator with Illuminated Advertising Sign

Capacity	1071 Litres (Gross)
Dimensions	1286W x 762D x 2220H
Weight	221Kg
Florist Benefits	Temperature Management for flowers
Colours	Ebony Black, and Snow White
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.9 Amps
Thermometer	Digital
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
-	2 x Self Closing, Double Glazed Safety Glass,
Door	Double Heat reflective Low E, Warm edge
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	4.74 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertis-	200mm High, Top Mounted

LED, Automatic and manual control

RRP : \$4786 + GST EB36R-Sn-A-Wine





Sign Illumination



IP Protected by AUS DSN no 345317 & Patent NO 2013100761





Daily running costs based on power costs of .28c per kW

- \$1.20 per day with sign box off
- \$1.33 per day with sign box on

For more information on the Orford Group Wine and Bar Range including features & benefits refer to



Page 35

z

0

4

~ u. c

_ 2 Line,

ш,

2

1300 ORFORD (1300 673 673) +617 4641 7372

382 South St \bowtie Harristown Queensland 4350 Australia



<u>Contact us for a trade discoun</u> Do you have an ABN



EB45R-Sn-Wine Specifications

Vertical Wine Refrigerator with Illuminated Advertising Sign


Wine Cabinet Capacity


Dimensions Weight **Florist Benefits** Colours Power Point Input Current Thermometer Shelves Shelves Shelf Adjustment Door Footings Interior Light Refrigerant **Cabinet Classes** MEPS * Energy Consumption **Condenser Filter** Illuminated Advertising

1384 Litres (Gross) 1640W x 762D x 2220H 265 Kg **Temperature Management for flowers** Ebony Black, and Snow White 220 - 240v 50Hz. (Standard GPO) 3.2 Amps Digital 12 Height Adjustable Heavy Duty PVC Coated 3 Fixed Stainless Steel Base Shelves 12mm Increments 3 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge Heavy Duty Castors, Lockable Front LED, Automatic and manual control R134a 3M1, 4M1, 5M1 Compliant (High Efficiency) 6.03 kWh/24h Easy front access 200mm High, Top Mounted

Sign Illumination

LED, Automatic and manual control





IP Projected by AUS DSN no 345317 C Pace ALNO/2013100761 RRP : \$5907 + GST EB45R-Sn-A-Wine



Daily running costs based on power costs of .28c per kW

- \$1.53 per day with sign box off
- \$1.69 per day with sign box on



www.barfridges4u.com.au

For more information on the Orford Group Bar and Wine Range including features & benefits refer to

z o

RA

ш 5

2

ш 22







"Cool-Choc" EB30CC-Sn

EB30R-CC-Sn	Vertical Display Choc Refrigerator	
Specifications	with Illuminated Advertising Sign	RRP : \$4324 ·
Construction	Powder Coated galvanized steel	EB30CC-S
	Interior /Exterior White	
Capacity	895 Litres (Gross)	
Dimensions	1094W x 762D x 2220H	2 1 6
Weight	210Kg	
Operating Temp	12° - 18° C.	
Ambient Temp Range	0° - 40° C.	
Power Point	220 - 240v 50Hz. (Standard GPO)	And and a second s
Input Current	2.8 Amps	and
Thermometer Shelves	Digital	
Shelves	8 Height Adjustable Heavy Duty PVC Coated 2 Fixed Stainless Steel Base Shelves	i i i i i i i i i i i i i i i i i i i
Shelf Adjustment	12mm Increments	
Shell Aujustment		antistan and and
Refrigerated Shelf	2.17 m ²	parameter and the state
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas	
Door	2 x Self Closing, Double Glazed Safety Glass,	
DOOI	Double Heat reflective Low E, Warm edge	anananinin analar
Footings	Heavy Duty Castors, Lockable Front	and
Interior Light	LED, Automatic and manual control	
Refrigerant	R134a	
Cabinet Classes	3M1, 4M1, 5M1	
MEPS	Compliant (High Efficiency)	
* Energy Consump-	4.24 kWh/24h	e pirtord
Condenser Filter	Easy front access	Caral State
Illuminated Advertis-	200mm High, Top Mounted	
Sign Illumination	LED, Automatic and manual control	

+ GST Sn





Contact us for a trade discount

Do you have an ABN?

+ +	1094	
762		IP Protecte
1220	pa	& Patent N
458		
	1094	745
		that
		$\sum_{i=1}^{n}$
2220		

ted by AUS DSN no 345317 NO 2013100761



The Orford Group EB Model	Energy Consumption @3M1 kWh/24hr
EB30R-A	3.78
EB30R-SN-A with illuminated sign	4.24

For more information on the Orford Refrigeration Chocolate Fridge Range including features & benefits refer to

www.orford.com.au

Page 37 Back to Index

1300 ORFORD (1300 673 673) +617 4641 7372

762



"Cool-Choc" EB36CC-Sn

ntact us for a trade discount!


Do you have an ABN

EB36R-CC-Sn **Vertical Display Choc Refrigerator** with Illuminated Advertising Sign **Specifications** Powder Coated galvanized steel Construction Interior /Exterior White Capacity 1071 Litres (Gross) Dimensions 1286W x 762D x 2220H Weight 221Kg **Operating Temp** 12° - 18° C. Ambient Temp Range 0° - 40° C. **Power Point** 220 - 240v 50Hz. (Standard GPO) Input Current 2.9 Amps Thermometer Digital Shelves 8 Height Adjustable Heavy Duty PVC Coated Shelves 2 Fixed Stainless Steel Base Shelves Shelf Adjustment 12mm Increments 2 x Self Closing, Double Glazed Safety Glass, Door Double Heat reflective Low E, Warm edge Footings Heavy Duty Castors, Lockable Front LED, Automatic and manual control Interior Light Refrigerant R134a Drier Solid Core Insulation 50mm Polyurethane, CFC, HCFC, HFC Free **Cabinet Classes** 3M1, 4M1, 5M1 MEPS Compliant (High Efficiency) * Energy Consumption 4.74 kWh/24h **Condenser Filter** Easy front access Illuminated Advertising 200mm High, Top Mounted

RRP : \$4786 + GST EB36CC-Sn







Sign Illumination

IP Protected by AUS DSN no 345317 & Patent NO 2013100761

LED, Automatic and manual control



762

The Orford Group EB Model	Energy Consumption @3M1 kWh/24hr
EB36R-A	4.28
EB36R-SN-A with illuminated sign	4.74

For more information on the Orford Refrigeration Chocolate Fridge Range including features & benefits refer to

www.orford.com.au

Page 38 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372

vanue orford com





"Cool-Choc" EB45CC-Sn

EB45R-Sn Specifications

Cabinet Classes

Condenser Filter

Sign Illumination

* Energy Consumption

Illuminated Advertising

1640

1640

MEPS

762

82

2220

1220

Vertical Display Refrigerator with Illuminated Advertising Sign

Powder Coated galvanized steel

Do you have an ABN? ntact us for a trade discount



Construction Interior / Exterior White Capacity 1384 Litres (Gross) Dimensions 1640W x 762D x 2220H Weight 265 Kg **Operating Temp** 12° - 18° C. 0° - 40° C. Ambient Temp Range **Power Point** 220 - 240v 50Hz. (Standard GPO) Input Current 3.2 Amps Thermometer Digital Shelves 12 Height Adjustable Heavy Duty PVC Coated 3 Fixed Stainless Steel Base Shelves Shelves Shelf Adjustment 12mm Increments **Refrigerated Shelf Area** 3.38 m² Condensate Disposal Automatic by energy efficient, No Cost, Hot Gas 3 x Self Closing, Double Glazed Safety Glass, Door Footings Interior Light Refrigerant

Double Heat reflective Low E, Warm edge Heavy Duty Castors, Lockable Front LED, Automatic and manual control R134a 3M1, 4M1, 5M1 Compliant (High Efficiency) 6.03 kWh/24h Easy front access

IP Protected by AUS DSN no 345317

& Patent NO 2013100761

762

200mm High, Top Mounted

LED, Automatic and manual control

RRP : \$5907 + GST EB45CC-Sn



The Orford Group EB Model	Energy Consumption
EB45R-A	5.45
EB45R-SN-A with illuminated sign	6.03

For more information on the Orford Refrigeration Chocolate Fridge Range including features & benefits refer to

www.orford.com.au

Page 39 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 color@offord.com.au

www.orford.com



Orford Bakery & Cake Display



Café & Cake KK Range

KK1500-3 Specifications

Cake Display—Tower Style

Contact us for a trade discoun Со Са Di W Op Ar Ро In Th Sł Re Re Fo In Re Dr Fa Sv Со

> Cl In

•	
onstruction	Stainless Steel—internal / external
apacity	850 Litres (Gross)
imensions	1500 W x 800 D x 1300 H (mm)
/eight	280 Kg (net)
perating Temp	2° to 8° C.
mbient Temp Range	0° - 32° C.
ower Point	220 - 240v 50Hz. (Standard GPO)
nput Current	5.6 Amps
hermometer x 2	Digital at rear and inside cabinet
helves	2 Height Adjustable Heavy Duty glass
efrigerated Shelf Area	2.62 m ²
ear Door	2 x Ezy slide doors
ootings	Heavy Duty Castors, Lockable Front
nterior Light	LED
efrigerant	R404a Charge 630g
rier	Solid Core
an	EBM Fans
witches	Separate lighting and cabinet switches
ompressor	Embraco
leaning Filter	Ezy pull out filter for cleaning
sulation	60mm Polyurethane, CFC, HCFC, HFC Free

Orford KK1500-3 Cake Display

RRP: \$6868 + GST



Display cakes beautifully in the Orford KK cake fridge

www.orford.com.au

sales@orford.com.au

1300 673 673







www.orford.com.au

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au

382 South St Harristown Queensland 4350 Australia

39 Dunhill Cres, 50 Morningside, Qld, 4170



Page 41 Back to Index

Do you have an ABN?



Café & Cake KK Range

Contact us for a trade discou Do you have an ABN









Features a second digital controller in the cabinet space





1300 ORFORD (1300 673 673) +617 4641 7372





Features a cleaning filter



Features a digital controller operational from the rear of the cabinet

Display cakes beautifully in the **Orford cake Display Cabinets**

www.orford.com.au

sales@orford.com.au

1300 673 673



Page 42

382 South St Harristown Queensland 4350 Australia

 \bowtie

39 Dunhill Cres, Morningside, Qld,





specialities

43 Back to Index

VB36L-Sn-IM **ICE Freezer**

VB36L-Sn-A-Ice **Specifications**

Vertical Display Ice Freezer

with Illuminated Advertising Sign

Construction Capacity Dimensions Weight Operating Temp Ambient Temp Range Power Point Input Current Thermometer Shelves Shelves Shelf Adjustment **Refrigerated Shelf Area** Condensate Disposal Full Handled Door Footings Interior Light Refrigerant Drier Insulation Cabinet Classes MEPS * Energy Consumption

Condenser Filter

Sign Illumination

HACCP Function

Sign Illumination

Temperature Alarms

Sign

Defrost

ntact us for a trade discou

Do you have an ABN


Powder Coated galvanized steel Interior /Exterior White 1071 Litres (Gross) 1286W x 866 D (+82 overhang = 952mm total) x 2215H (mm) 250 Kg (net) -19° to -23° C. 0° - 40° C. 220 - 240v 50Hz. (15AMP power outlet) 6.3 Amps Digital 8 Height Adjustable Heavy Duty PVC Coated 2 Fixed Stainless Steel Base Shelves 12mm Increments 2.62 m² Automatic by energy efficient, No Cost, Hot Gas 2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E, Warm edge with removable torsion bar, heated frame Heavy Duty Castors, Lockable Front LED, Automatic and manual control R404a Solid Core 60mm Polyurethane, CFC, HCFC, HFC Free 3L1, 4L2, 5L3 up to 40 degree Celsius ambient Compliant (High Efficiency) 20.73 kWh/24h/m2 Easy front access Illuminated Advertising 205mm High, Top Mounted LED, Automatic (motion sensor control) and manual control High and low temperature alarms Alarm system


Orford VB36LSn—IM ICE Freezer

RRP: \$8885 + GST









Energy Efficient Hot Gas

LED, Automatic and manual control

The Orford Group VB Freezer Model	Energy Consumption @3L1 kWh/24hr	
VB36L-Sn-IM	20.73	
Maximise Ice Sales with the Orford Bottom Mount Ice Freezer with a removable package.		
Matches the	Orford EB Range	
100% designed by the	e Orford Engineering Team	
Patent Protected in Australia & New Zealand		
Www.orford.com.au		



Page 44

1300 ORFORD (1300 673 673) +617 4641 7372



Orford Minus22 freezer Series

The Orford Minus22 Freezer Series



Orford Freezer FML20	Vertical Display Ice Freezer
Specifications	
Specifications	
	Powder Coated galvanized steel
Construction	Interior /Exterior White standard (black optional when
FML-20	1 DOOR FREEZER
Capacity	560 Litres (gross)
Dimensions	750 w x 760 D x 2039 H (mm) (B models onwards)
Weight	150kg (net)
Temp	-6c—-10c
_	1 x Self Closing, Triple Glazed Safety Glass, Argon filled
Doors	with Double Heat reflective Low E,
Ambient temp	32c degrees
Weight	166 Kg (net)
Power Point	220—240v (1 x 10 AMP powerpoint)
* Energy Consumption	12.7 kWh/24h/m2
Common Specifications	FML20 / FML30 / FML50
Compressor	Danfoss
Thermometer	Digital Elitech Controller
Shelves per door	5 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Footings	Heavy Duty 2.5mm Castors, Lockable Front
Interior Light	LED light with light switch
Refrigerant	R290 Natural Refrigerant (B models onwards)
Drier	Solid Core to suit
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	
Condenser Filter	Easy front access
Security	Freezer has lock and key
Drip Tray Evaporation	Hot Gas
Method	Πυι θαδ
Kick Panel	Easy unclip and remove system
Defrost	Energy Efficient Hot Gas
Compliance	MEPS, EMC,

Orford FML-20-Blce Freezer RRP \$4275 + GST





Page 45 Back to Index

Contact us for a trade discoun

REFRIGERATION

Do you have an ABN?

1300 ORFORD (1300 673 673)
 +617 4641 7372
 <u>sales@orford.com.au</u>





Orford Minus22 freezer Series

The Orford Minus22 Freezer Series





Do you have an ABN? Contact us for a trade discoun



Orford Freezer FML30	2 Door Vertical Display ice Freezer
Specifications	
Construction	Powder Coated galvanized steel Interior /Exterior White (please check stock)
FML-30	2 DOOR FREEZER
Capacity	930 Litres (gross)
Dimensions	1253 w x 760 D x 2039 H (mm)
Weight	240 kg (net)
Doors	2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E,
Temp	6c—-10c (Suitable for Ice)
Ambient Temperature	32 degrees
Power Point	1 x 15 AMP plug
* Energy Consumption	22.4 kWh/24h/m2
Common Specifications	FML20 / FML30 / FML50
Compressor	Danfoss
Thermometer	Digital Elitech Controller
Shelves per door	5 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Footings	Heavy Duty 2.5mm Castors, Lockable Front
Interior Light	LED light
Refrigerant	R290 Natural Refrigerant (B models onwards)
Drier	Solid Core
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	
Condenser Filter	Easy front access
Security	Freezer has lock and key
Drip Tray Evaporation Method	Hot Gas
Kick Panel	Easy unclip and remove system
Defrost	Energy Efficient Hot Gas
Compliance	MEPS, EMC,

Orford FML-30-B Ice Freezer RRP \$5567 + GST







Page 46 Back to Index







Orford Minus22 freezer Series

The Orford FML Freezer Series



Orford Freezer FML50

z

0

_ -

۹

~

ш

c

_

Ľ ы. ш, 2

3 Door Vertical Display ice Freezer

Specifications	
Construction	Powder Coated galvanized steel
	Interior /Exterior White (please check stock)
FML-50	3 DOOR FREEZER
Capacity	1450 Litres (gross)
Dimensions	1880 w x 760 D x 2039 H (mm)
Weight	305 kg (net)
Doors	3 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E,
Temp	6c—-10c (Suitable for Ice)
Ambient Temperature	32 degrees
Power Point	1 x 15 AMP plug
* Energy Consumption	34.3 kWh/24h/m2
Common Specifications	FML20 / FML30 / FML50
Compressor	Danfoss
Thermometer	Digital Elitech Controller
Shelves per door	5 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Footings	Heavy Duty 2.5mm Castors, Lockable Front
Interior Light	LED light
Refrigerant	R290 Natural Refrigerant (B models onwards)
Drier	Solid Core
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	
Condenser Filter	Easy front access
Security	Freezer has lock and key
Drip Tray Evaporation Method	Hot Gas
Kick Panel	Easy unclip and remove system
Defrost	Energy Efficient Hot Gas
Compliance	MEPS, EMC,

Orford FML50-B Ice Freezer

R290 Natural Refrigerant

RRP \$6920 + GST





 \bowtie



Page 47 Back to Index

1300 ORFORD (1300 673 673) +617 4641 7372

382 South St Harristown Queensland 4350 Australia



<u>Contact us for a trade discoun</u> Do you have an ABN?

under bench /bar series



PlanetSmart[™] **Black Bar Range**



Alfresco Dining with ORFORD

The Orford Back Bar Cooler Range

The perfect choice for your Alfresco area. The cabinets can be built fully into your cabinet or wall cavity

Energy efficient. Outdoor rated, tested to 32 degrees

The Orford Back Bar Range is part of the Orford

Planetsmart Range—saving the planet one fridge at a time



Orford BB135	135 Litre Back Bar RRP \$2010 + GST
Construction	Stainless Steel interior & Exterior
Capacity	135 Litres (Gross)
Dimensions	600.W x 500 D + 45mm handle x 865 H
Weight	55 Kg
Operating Temp	0° - 10° C.
Ambient Temp Range	0° - 32° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	8.2 Amps
Thermometer	Digital Carel Eco Controller
Shelves	2 Height Adjustable
Door	1 x Low E glass doors with heated door mullion
Fans	EBM fans
Condenser	Fin type—60 gram R600 refrigerant

LED IP23

Orford BB210

Condenser Interior Light

IP Rating

Construction	Stainless Steel interior & Exterior
Capacity	210 Litres (Gross)
Dimensions	900.W x 500 D + 45mm handle x 865 H
Weight	75 Kg
Operating Temp	0° - 10° C.
Ambient Temp Range	0° - 32° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	9.2 Amps
Thermometer	Digital Carel Eco Controller
Shelves	4 Height Adjustable
Door	2 x Low E glass doors with heated door mullion
Fans	EBM fans
Condenser	Tube condenser—48 gram refrigerant
Interior Light	LED
IP Rating	IP34



Page 49

z

0 _

-4

~

ш c

_

2

..... ш,

2

1300 ORFORD (1300 673 673) +617 4641 7372





PlanetSmart[™] Back Bar Range



Body Finish : 304 Stainless Interior Finish : Polished 304 Mirror Stainless Door Finish : 304 Stainless Door Mullion : Heated Door Hinged : Self Closing Door Opened Depth : 910mm Decibel rating : 50 Double Glazed tempered door. Low E glass Can operate in 40 degrees ambient Famous parts : Carel Eco controllers, EBM fans, Embraco compressor Orford Back Bars Alfresco dining just got better

Lockable : Yes Lighting : LED lights Adjustable Feet : Yes (4) Shelves : 2 x flat chromed adjustable shelves per door MEPS compliant CTick compliant IP34 Outdoor rated Allow 5 - 10 mm Shadowline when building into cabinetry Low E Glass Doors

Door Locks



Orford BB325	325 Litre Back Bar RRP \$3465 + GST
Construction	Stainless Steel interior & Exterior
Capacity	325 Litres (Gross)
Dimensions	1350 W x 500 D + 45mm handle x 865 H
Weight	110 Кg
Operating Temp	0° - 10° C.
Ambient Temp Range	0° - 32° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	9.2 Amps
Thermometer	Digital Carel Eco Controller
Shelves	6 Height Adjustable
Door	3 x Low E glass doors with heated door mullion
Fans	EBM fans
Interior Light	LED



z o

RA

Page 50 <u>Back to Ind</u>

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au
 www.orford.com.au

382 South St Harristown Queensland 4350 Australia

 \bowtie





PlanetSmart[™] Back Bar Range

Do you have an ABN? Contact us for a trade discount




Orford Back Bars Alfresco dining just got better





Model	H mm	W mm	D mm	Gross Weight KGs	Refrigerant	Shelves	Capacity litres	330ml Bottles	Power Consump- tion (at 25 de- grees ambient)
BB135	865	600	500 +45mm handle	55	R600a	2	135	104	1.93Kwh/24hrs
BB210	865	900	500 + 45mm handle	69	R600a	4	210	169	2.68Kwh/24hrs
BB325	865	1350	500 + 45mm handle	90	R600a	6	325	260	4.22Kwh/24hrs





ebmpapst)

German brand EBM fan motors for reliable service





Page 51 <u>Back to Index</u> 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au
 www.orford.com.au





Halo KUR Refrigerator



Halo KUR9-1 (HC)	198 Litre Underbench RRP \$3,670 + GST
Construction	Stainless Steel interior & Exterior (Front breathing)
Capacity	198 Litres (Gross)
Dimensions	900 W x 700 D x 850 mm H (on castors)
Weight	72 Kg
Operating Temp	0° - 10° C.
Ambient Temp Range	0° - 32° C.
Power Point	220 - 240v 50Hz. (Standard GPO) 1 x 10AMP plug
Input Current	3 Amps
Thermometer	LED Digital Display Soft Touch Controller
Shelves	1 Height Adjustable
Refrigerant	R290 Natural Refrigerant
Compressor	Left hand side Embraco Compressor

Halo KUR12-2 (HC)	311 Litre Underbench RRP \$4,200 + GST	
Construction	Stainless Steel interior & Exterior—Front breathing	
Capacity	311 Litres (Gross)	
Dimensions	1200 W x 700 D x 850 mm H (on castors)	-
Weight	84 Kg	
Operating Temp	0° - 10° C.	
Ambient Temp Range	0° - 32° C.	_
Power Point	220 - 240v 50Hz. (Standard GPO) 1 x 10AMP plug	
Input Current	3 Amps	
Thermometer	LED Digital Display Soft Touch Controller	
Shelves	2 x Height Adjustable	
Refrigerant	R290 Natural Refrigerant	
Compressor	Left hand side Embraco Compressor	



Halo KUR15-2 (HC)	425 Litre Underbench RRP \$4,560 + GST
Construction	Stainless Steel interior & Exterior
Capacity	425 Litres (Gross)
Dimensions	1500 W x 700 D x 850 mm H (on castors)
Weight	93 Kg
Operating Temp	0° - 10° C.
Ambient Temp Range	0° - 32° C.
Power Point	220 - 240v 50Hz. (Standard GPO) 1 x 10AMP plug
Input Current	3 Amps
Thermometer	LED Digital Display Soft Touch Controller
Shelves	3 x Height Adjustable
Refrigerant	R134a
Compressor	Left hand side Embraco Compressor

Page 52 Back to Index

Contact us for a trade discount

REFRIGERATION

Do you have an ABN?

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au





Halo KUR Refrigerator

\$5,080 + GST

Halo KUR18-3 Undercounter Specifications (HC)	Horizontal Undercounter Fridg
Construction	Stainless steel exterior & interior
Capacity	538 Litre
Dimensions	1800 w x 700 d x 850 h (mm) on castors
Weight	109 kg
Operating Temp	0c to 8c,
Ambient Temp Range	Up to 32 degrees
Input Current	220V / 50Hz
Thermometer	LED Digital Display & Soft Touch Control
Shelves	3 shelves
Refrigerant	R290 Natural Refrigerant
Compressor	Embraco
Fans	EBM fans



Halo KUR24—4 Undercounter Specifications (HC)	Horizontal Undercounter Fridge \$7,270 + GST
Construction	Stainless steel exterior & interior
Capacity	640 Litre
Dimensions	2440 w x 700 d x 850 h (mm) on castors
Weight	122kg
Operating Temp	0c to 8c,
Ambient Temp Range	Up to 32 degrees
Input Current	220V / 50Hz 10 AMP
Thermometer	LED Digital Display &Soft Touch Control
Shelves	4 shelves
Refrigerant	R290 Natural Refrigerant
Compressor	Embraco
Fans	EBM fans

Page 53 Back to Index

Do you have an ABN?

Cont

REFRIGERATION

1300 ORFORD (1300 673 673)
 +617 4641 7372
 color@orford.com au

www.orford.com.a





Construction Capacity

Dimensions Weight

Power Point


Input Current

Thermometer

Shelves

Halo KUF Freezer

198 Lt Undercounter FREEZER \$3,890 + GS1

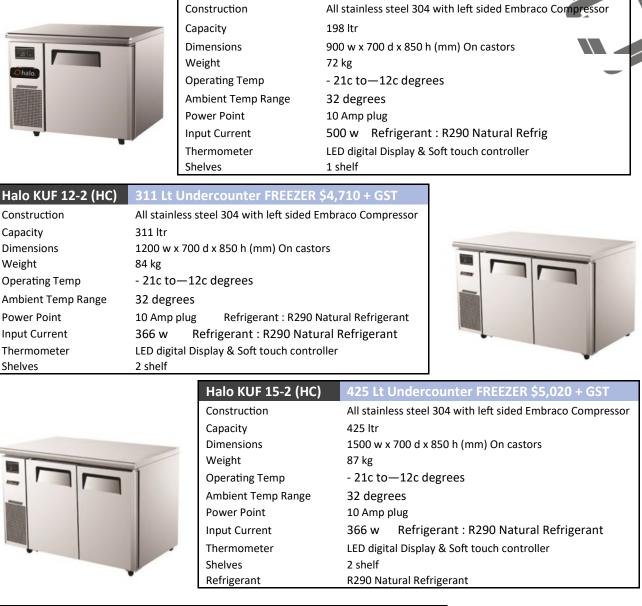

Halo KUF 18-3 (HC)	538 Lt Undercounter FREEZER \$5,990 + GST
Construction	All stainless steel 304 with left sided Embraco Compressor
Capacity	538 ltr
Dimensions	1800 w x 700 d x 850 h (mm) On castors
Weight	109 kg
Operating Temp	- 21c to—12c degrees
Ambient Temp Range	32 degrees
Power Point	10 Amp plug Refrigerant : R290 Natural Refrigerant
Input Current	613 w 4.4 Amps
Thermometer	LED digital Display & Soft touch controller
Shelves	3 shelf
Refrigerant	R290 Natural Refrigerant

Halo KUF 9-1 (HC)



Page 54

z

0

<

~

c 2 ш,

> 1300 ORFORD (1300 673 673) +617 4641 7372





Halo KURF Combos

Halo I Constr Capaci

Halo KURF12-2	Undercounter FREEZER / FRIDGE \$5,440 + GST
Construction	All stainless steel 304 with left sided Embraco Compressor
Capacity	Freezer 134 Ltr / Fridge 136 ltr
Dimensions	1200 w x 700 d x 850 h (mm) On castors
Weight	87 kg
Operating Temp	Fridge 1—5 degrees / Freezer 21c to—12c degrees
Ambient Temp	32 degrees
Power Point	10 Amp plug
Input Current	
input ourrent	316 w
Thermometer	316 w LED digital Display & Soft touch controller
1	
Thermometer	LED digital Display & Soft touch controller





Halo KURF15-2 (HC)	Undercounter FREEZER / FRIDGE \$5,750 + GST
Construction	All stainless steel 304 with left sided Embraco Compressor
Capacity	Freezer 177 Ltr / Fridge 189 ltr
Dimensions	1500 w x 700 d x 850 h (mm) On castors
Weight	96 kg
Operating Temp	Fridge 1—5 degrees / Freezer 21c to—12c degrees
Ambient Temp Range	32 degrees
Power Point	10 Amp plug
Input Current	316 w Refrigerant : R290—Natural Refrigerant
Thermometer	LED digital Display & Soft touch controller
Shelves	2 shelf
Refrigerant	R290—Natural Refrigerant

Halo KURF18-3 (HC)	Undercounter FREEZER / FRIDGE \$6,420 + GST
Construction	All stainless steel 304 with left sided Embraco Compressor
Capacity	Freezer 151 Ltr / Fridge 314 ltr
Dimensions	1800 w x 700 d x 850 h (mm) On castors
Weight	96 kg
Operating Temp	Fridge 1—5 degrees / Freezer 21c to—12c degrees
Ambient Temp Range	32 degrees
Power Point	10 Amp plug
Input Current	316 w Refrigerant : R290—Natural Refrigerant
Thermometer	LED digital Display & Soft touch controller
Shelves	2 shelf
Refrigerant	R290—Natural Refrigerant



Contact us for a trade discount Do you have an ABN?



Page 55 Back to Index

1300 ORFORD (1300 673 673) +617 4641 7372

 \bowtie 382 South St Harristown Queensland 4350 Australia





Halo KGR Refrigerator

Halo KGR9—1 door (HC) Specifications (HC)	Horizontal Undercounter Fridge \$4,280 + GST
Capacity	137 Litre
Dimensions	900 w x 700 d x 850 h (mm) on castors
Weight	80 kg on castors
Operating Temp	0c to 8c,
Ambient Temp Range	Up to 28 degrees
Input Current	220V / 50Hz 10 AMP
Thermometer	LED Digital Display &Soft Touch Control
Doors & Shelves	1 door with LOW E glass and 1 shelf
Refrigerant	R290 Natural Refrigerant





Halo KGR12—2 door (HC) Specifications	Horizontal Undercounter Fridge \$5,530 + GST
Capacity	311 Litre
Dimensions	1200 w x 700 d x 850 h (mm) on castors
Weight	80 kg on castors
Operating Temp	0c to 8c,
Temp Range	Up to 28 degrees ambient
Input Current	220V / 50Hz 10 AMP
Thermometer	LED Digital Display &Soft Touch Control
Doors & Shelves	2 doors with LOW E glass and 2 shelves
Refrigerant	R290

Page 56 Back to Index

REFRIGERATION

℅ 1300 ORFORD (1300 673 673) ஜ +617 4641 7372

sales@orford.com.a



halo

Halo KGR Refrigerator

Halo KGR15—2 door Specifications (HC)	Horizontal Undercounter Fridge \$5,790 + GST
Capacity	425 Litre
Dimensions	1500 w x 700 d x 850 h (mm) on castors
Weight	90 kg on castors
Operating Temp	0c to 8c,
Ambient Temp Range	Up to 28 degrees
Input Current	220V / 50Hz 10 AMP
Thermometer	LED Digital Display &Soft Touch Control
Doors & Shelves	2 door with LOW E glass and 2 shelf
Refrigerant	R290 Natural Refrigerant





<i>Halo KGR18—3 dr</i> Specifications (HC)	Horizontal Undercounter Fridge \$6,890 + GST
Capacity	538 Litre
Dimensions	1800 w x 700 d x 850 h (mm) on castors
Weight	127 kg on castors
Operating Temp	0c to 8c,
Temp Range	Up to 28 degrees ambient
Input Current	220V / 50Hz 10 AMP
Thermometer	LED Digital Display &Soft Touch Control
Doors & Shelves	3 door with LOW E glass and 3 shelves
Refrigerant	R290

Halo KGR24—4dr Specifications (HC)	Horizontal Undercounter Fridge \$8,510 + GST
Capacity	600 Litre
Dimensions	2400 w x 700 d x 855 h (mm) on castors
Weight	145 kg on castors
Operating Temp	0c to 8c,
Temp Range	Up to 28 degrees ambient
Input Current	220V / 50Hz 10 AMP
Thermometer	LED Digital Display &Soft Touch Control
Doors & Shelves	3 door with LOW E glass and 3 shelves
Refrigerant	R290



Page 57 Back to Index

REFRIGERATION







halo

KRF Fridge / Freezer Combos

Halo KRF 25-2 (HC)

Construction

Operating Tem Ambient Temp Power Point


Input Current Thermometer Shelves Refrigerant Compressor

Capacity Dimensions Weight

664 Litre Combo RRP \$5,970 + GST

	Stainless Steel interior & Exterior top Mount
	Freezer 242 Litres plus Fridge 222 Litres = 664 Ltre
	640 W x 860 D x 1926 mm H (on castors)
	85 Kg
	5
р	Fridge—1° - 10° C. Freezer - 21° - 12° C.
Range	0° - 32° C.
	220 - 240v 50Hz. (Standard GPO) 1 x 10AMP plug
	4.4 Amps
	LED Digital Display Soft Touch Controller
	2 x Height Adjustable
	R290 Natural Refrigerant
	Two compressor system









Contact us for a trade discoun

Do you have an ABN?



Halo KRF 45-2 (HC)	1109 Litre Combo RRP \$8,565 + GST
Construction	Stainless Steel interior & Exterior top Mount
Capacity	Freezer 464 Litres plus Fridge 645 Litres = 1109 Ltre
Dimensions	1260 W x 800 D x 1926 mm H (on castors)
Weight	150 Kg
Operating Temp	Fridge—1° - 8° C. Freezer - 21° - 12° C.
Ambient Temp Range	0° - 32° C.
Power Point	220 - 240v 50Hz. (Standard GPO) 1 x 15 AMP plug
Input Current	Fridge - 4.4 Amps Freezer—6.73 Amps 15amp
Thermometer	LED Digital Display Soft Touch Controller
Shelves	2 x Height Adjustable
Refrigerant	R290 Natural Refrigerant
Compressor	Two compressor system

Page 59 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au




KRF Fridge / Freezer Combos

Halo KRF 45-4	Dual Temp Fridge / Freezer RRP \$9,100 + G
Construction	Stainless Steel Top Mount
Capacity	Freezer 464 ltres / fridge 642 Ltres = 1106 Ltres
Dimensions	1260 w x 860 d x 1935 h (including castors)
Weight	150 kg
Operating Temp	Fridge 1°c to 8°c Freezer -21°c to -12°c
Ambient Temp Range	Up to 32°c ambient temperature
Power Point	15 Amp Australian plug
Input Current	Fridge—R-134A 4.4amps power—w673,
Thermometer	Digital
Shelves	3 per side (6 in total)
Refrigerant	R290 Natural Refrigerant
Compressor	Two compressor system





halo.



Halo KRF 65—3	Dual Temp Fridge / Freezer RRP \$11,470 + GST		
Construction	Stainless Steel Top Mount		
Capacity	Freezer 555 ltres / fridge 1275 Ltres = 1830 Ltres		
Dimensions	1900 w x 860 d x 1935 h (including castors)		
Weight	250 kg		
Operating Temp	Fridge 1°c to 8°c Freezer— -21°c to -12°c		
Ambient Temp Range	Up to 32°c ambient		
Power Point	15 Amp Australian plug		
Input Current	Fridge—R-134A 4.4amps power—w673		
Thermometer	Digital		
Shelves	3 per door (9 in total)		
Refrigerant	R290 Natural Refrigerant		
Compressor	Two compressor system		

Do you have an ABN? Contact us for a trade discount!

> Page 60 Back to Index

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au





Food Service Storage Cabinets







Model	Temp	Doors	Net Vol- ume	Shelves	Dimensions	Power 220v 50Hz	Shipping Weight
Halo KR25-1	Refrigerator 1~ 8 degrees	1	574	3	640w x 850d x 1926h	314w	115
Halo KF25-1	Freezer –21 ~ -12 degrees	1	574	3	640w x 850d x 1926h	496w	120
Halo KR45-2	Refrigerator 1 ~ 8 degrees	2	1215	6	1260w x 850d x 1926h	366w	190
Halo KF45-2	Freezer –21~ -12 degrees	2	1215	6	1260w x 850d x 1926h	774w	200
Halo KR65-3	Refrigerator 1—8 degrees	3	1876	9	1900w x 850d x 1926h	732w	280
Halo KF65-3	Freezer –21 ~ 12 degrees	3	1876	9	1900w x 850d x 1926h	1346w	280

Note : the depth includes 50mm for the rear condensate tray



Page 61 Back to Index



ord.com.au





Food Services

Contact us for a trade discou Do you have an ABI









- Designed to 40 Degrees ambient operating temperature
- **Requires one standard power point : 240V 50Hz** 10 amp
- **Digital Temperature Display**
- 3 height adjustable shelves per door. Individual shelves behind each door maximize storage configurations
- Stainless steel construction for superior corrosion resistance
- Stainless steel internal floor with coved corners allows for easy cleaning and sanitizing
- Large castors for ease of cabinet movement
- Solid lockable doors. Designed with recessed handle and self closing hinging with 90 degree dwell feature
- **LED interior lighting**
- One piece door gaskets, removable without tools for easy cleaning
- Automatic energy efficient hot gas condensate dis-• posal. No drainage required
- Internal Pressure release valve



Page 62

1300 ORFORD (1300 673 673) +617 4641 7372





KR Refrigerator



Halo KR45—2 (HC) Construction Capacity Dimensions Weight

Operating Temp

Power Point

Input Current

Ambient Temp Range

Halo KR25-1 (HC)	574 Ltr Refrigerator RRP \$5,010 + GST	
Construction	Stainless Steel Top Mount	
Capacity	574 Litre	
Dimensions	640 w x 850 d x 1926 h (incl castors)	
Weight	80kg	
Operating Temp	1c to 8c	
Ambient Temp Range	32 degrees ambient	
Power Point	10 Amp	
Input Current	Amps 3.5 Power - W366	
Thermometer	Digital	
Shelves	3 adjustable	
Refrigerant	R290 Natural Refrigerant	
1215 Ltr Refrigerator RRI	P \$6,070 + GST	
Stainless Steel Top Mount		
1215 Litre		
1130 w x 850 d x 1926 h (incl castors)		
80kg		
1c to 8c		

1	Thermometer		Digital	
Ś	Shelves		4 adjusta	able
ł	Refrigerant		R290 Na	tural Refrigerant
				Halo KR65—3 (H
				Construction
				Capacity
				Dimensions
	n r	r I		Weight
				Operating Temp
	1	L	1	Ambient Temp R
			1000	

32 degrees ambient

Amps 3.5 Power - W366

10 Amp

Halo KR65—3 (HC)	1876 Ltr Refrigerator RRP \$9,300 + GST
Construction	Stainless Steel Top Mount
Capacity	1876 Litre
Dimensions	1900 w x 850 d x 1926 h (incl castors)
Weight	167 kg
Operating Temp	1c to 8c
Ambient Temp Range	32 degrees ambient
Power Point	10 Amp
Input Current	Amps 3.5 Power - W366
Thermometer	Digital
Shelves	6 adjustable
Refrigerant	R290 Natural Refrigerant

Page 63 Back to Index

REFRIGERATION

1300 ORFORD (1300 673 673)
 +617 4641 7372
 <u>sales@orford.com.au</u>



halo

KF Freezer



Halo KF25-1F	574 ltr Freezer RRP \$5,430 + GST
Construction	Stainless steel inner & outer Top Mount
Capacity	574 ltre
Dimensions	640 w x 850 d x 1926 h (including castors)
Weight	80 kg
Operating Temp	-12c to -25c
Ambient Temp Range	36 degrees ambient
Power Point	10 Amps
Input Current	Power - W496 10 Amp
Thermometer	Digital
Shelves	3 adjustable
Refrigerant	R-290 Natural Refrigerant

Halo KF45-2F (HC)	1215 ltr Freezer RRP \$7,940 + GST
Construction	Stainless steel inner & outer Top Mount
Capacity	1215 ltre
Dimensions	1260 w x 850 d x 1926 h (including castors)
Weight	142 kg
Operating Temp	-12c to -25c
Ambient Temp Range	36 degrees ambient
Power Point	10 Amps
Input Current	Power - W496 10 Amp
Thermometer	Digital
Shelves	6 adjustable
Refrigerant	R-290 Natural Refrigerant





Halo KF65-3F (HC)	1876 ltr Freezer RRP \$10,480 + GST
Construction	Stainless steel inner & outer Top Mount
Capacity	1876 ltre
Dimensions	1900 w x 850 d x 1926 h (including castors)
Weight	167 kg
Operating Temp	–12c to –25c
Ambient Temp Range	36 degrees ambient
Power Point	15 Amps
Input Current	Power - W496 10 Amp
Thermometer	Digital
Shelves	9 adjustable
Refrigerant	R-290 Natural Refrigerant



2 0

IGERATI

REFR

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au



Salad and Sandwich Tables



halo_®



Halo KHR9-1 (FB) Specifications	Salad Table with Hood Lid RRP \$4,390 + GST
Construction	Stainless Steel—Front Breathing
Capacity	213 Litres
Dimensions	900 w x 700 d x 1134 h (with castors)
Weight	100 kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 32° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.5 Amps
Condiment Pans	1/6 size pans, 100mm deep plastic condiment pans
Shelves	1 shelf per door
Cutting Boards	204 mm deep, 12 mm thick cutting board
Temperature Controller	Digital Controller
Air Curtain	Cold air curtain forcing air to flow around the food pan
	area, covering underneath the pan and front, top and
Doors	1 Door with Door locks standard
Refrigerant	R290 Natural Refrigerant

Halo KHR12-2		
Specifications	Salad Table with Hood Lid RRP \$5,220 + GST	
Construction	Stainless Steel	A REAL PROPERTY AND A REAL
Capacity	309 Litres	
Dimensions	1200 w x 700 d x 1134 h (with castors)	
Weight	100 kg	
Operating Temp	0° - 5° C.	
Ambient Temp Range	0° - 32° C.	
Power Point	220 - 240v 50Hz. (Standard GPO)	
Input Current	3 Amps	
Power	314 W	
Condiment Pans	1/6 size pans, 100mm deep plastic condiment pans	
Shelves	1 shelf per door	
Cutting Boards	204 mm deep, 12 mm thick cutting board	
Temperature Controller	Digital Controller	
Air Curtain	Cold air curtain forcing air to flow around the food pan	
	area, covering underneath the pan and front, top and rear	MANAGAN
Doors	2 Doors with Door locks standard	
Refrigerant	R290	





Page 65

z 0 _ -۹ ~ ш ۍ – 2 ш 2



 \bowtie 382 South St Harristown Queensland 4350 Australia





Salad and Sandwich Tables

Halo KHR15-2 (FB) Specifications	Salad Table with Hood Lid RRP \$5,760 + GST
Construction	Stainless Steel
Capacity	420 Litres
Dimensions	1500 w x 700 d x 1134 h (with castors)
Weight	100 kg
Operating Temp	0° - 5° C.
Ambient Temp Range	
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	3 Amps
Power	314 W
Condiment Pans	1/6 size pans, 100mm deep plastic condiment pans
Shelves	1 shelf per door
Cutting Boards	204 mm deep, 12 mm thick cutting board
Temperature Controller	Digital Controller
Air Curtain	Cold air curtain forcing air to flow around the food pan
Air Curtain	area, covering underneath the pan and front, top and rear
Doors	2 Doors with Door locks standard
Refrigerant	R290





Contact us for a trade discount

Do you have an ABN?



Halo KHR18-3 (FB)	
Specifications	Salad Table with Hood Lid RRP \$6,720 + GST
Construction	Stainless Steel
Capacity	516 Litres
Dimensions	1800 w x 700 d x 1134 h (with castors)
Weight	102 kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 32° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	4.4 Amps
Power	366 W
Condiment Pans	1/6 size pans, 100mm deep plastic condiment pans
Shelves	1 shelf per door
Cutting Boards	204 mm deep, 12 mm thick cutting board
Temperature Controller	Digital Controller
Air Curtain	Cold air curtain forcing air to flow around the food pan
Air Curtain	area, covering underneath the pan and front, top and rear
Doors	3 Doors with Door locks standard
Refrigerant	R290

Page 66 <u>Back to Index</u>

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au



Orford Beverage Dispensers

Orford Refrigeration www.orford.com.au 1300 673 673



Orford Beverage Dispensers

Orford BD20— Refrigerated Premix dispenser RRP \$980 + GST

The Orford BD20 is a dual pour chilled beverage dispenser ideal for storing, chilling and dispensing beverage and is built to withstand the demands of high traffic areas such as Hotels, Resorts, Clubs, Pubs, Cafeterias, etc

Operates at +2 degrees to + 10 at 30 deg ambient temp and 60% humidity Features

- stores two x 10Lt packages of beverage simultaneously •
- Light box display
- Strong durable colorbond metal liner easy to clean and rust resistant
- The outlet pipeline is surrounded by a shield
- Dual pour







door lock



full plastic

di spen si ng

full plastic movable door

removable do or gasket





🗋 orford

Water tray with position sign



<u>Contact us for a trade discoun</u>

Do you have an ABN






Package shelf th guide



sealed outlet

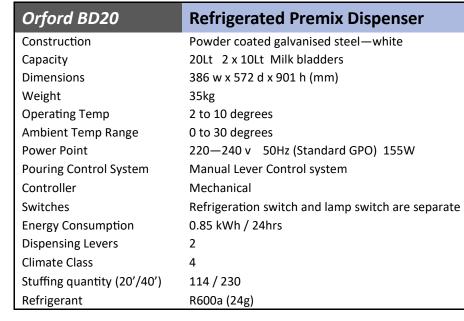

Page 68

1300 ORFORD (1300 673 673) +617 4641 7372





Orford BD20A Auto — Refrigerated Premix dispenser

The Orford BD20A Auto is a dual pour chilled beverage dispenser ideal for storing, chilling and dispensing beverage and is built to withstand the demands of high traffic areas such as Hotels, Resorts, Clubs, Pubs, Cafeterias, etc

Operates at +2 degrees to + 10 at 30 degrees ambient temp and 60% humidity

Features


Contact us for a trade discoun

z o

EFRIGERA

Do you have an ABN

- stores two x 10Lt packages of beverage simultaneously
- Light box display
- Electronic control system. The millilitres dispensed can be controlled
- Strong durable colorbond metal liner easy to clean and is rust resistant
- The outlet pipeline is surrounded by a shield
- A removable partition can be adjusted to accommodate cups at different heights





Dual pour

Orford BD20A Auto	Refrigerated Premix Dispenser
Construction	Powder coated galvanised steel—white
Capacity	20Lt 2 x 10Lt Milk bladders
Dimensions	386 w x 572 d x 901 h (mm)
Weight	35kg
Operating Temp	2 to 10 degrees
Ambient Temp Range	0 to 30 degrees
Power Point	220—240 v 50Hz (Standard GPO) 195W
Pouring Control System	Electronic Control system with controlled milk pourer
Climate Class	4
Controller	Mechanical
Switches	Refrigeration switch and lamp switch are separate
Energy Consumption	0.85 kWh / 24hrs
Refrigerant	R600a

Page 69 Back to Index
 \$\lambda\$
 1300 ORFORD (1300 673 673)

 \$\lambda\$
 +617 4641 7372

 \$\vee\$
 sales@orford.com.au





Gravity Mats & Dividers

Gravity Mats and Dividers and Ticket Stripping


Features & Benefits

- Fully customisable system to fit any product mechanising application \Rightarrow
- Unique wave surface increases efficiency and product flow \Rightarrow
- Retro-fit to existing cabinet fleets \Rightarrow
- Low profile design to maximise shelf space and product access \Rightarrow
- Designed and manufactured in Australia \Rightarrow

Email : sales@orford.com.au

Phone: 1300 673 673 (1300 ORFORD)



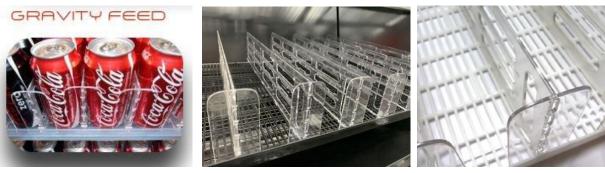







1300 ORFORD (1300 673 673) +617 4641 7372






Gravity Mats & Dividers

Gravity Feed Systems Suits EB20 / FMB20 (Single Door) RRP - \$246.15+ GST

- Excludes freight and Installation and excludes ticket stripping
- 5 x Gravity Mats
- 30 Dividers
- 10 Cable Ties

Gravity Feed Systems Suits EB30 / FMB30 (Slim 2 Door) RRP - \$445.30 + GST

- Excludes freight and Installation and excludes ticket stripping
- 10 x Gravity Mats
- 50 Dividers
- 20 Cable Ties





Product Pricing Ticket Strips—Per Shelf \$6.80 + GST

- Pricing is per shelf
- Ticket stripping slips over the existing shelf product stoppers
- To be ordered separately to the gravity feed systems







Page 71 <u>Back to Index</u> 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au
 www.orford.com.au





Gravity Mats & Dividers

Gravity Feed Systems Suits EB36 (2 Door) RRP - \$448.40 + GST

- Excludes freight and Installation and excludes ticket stripping
- 10 x Gravity Mats
- 60 X Dividers
- 20 X Cable Ties

Gravity Feed Systems Suits EB45 (3 Door) RRP - \$665.80 + GST

- Excludes freight and Installation and excludes ticket stripping
- 15 x Gravity Mats
- 75 Dividers
- 30 X Cable Ties



Product Pricing Ticket Strips—Per Shelf \$6.80 + GST

- Pricing is per shelf
- Ticket stripping slips over the existing shelf product stoppers
- To be ordered separately to the gravity feed systems





z o

ATI

~

c

Ľ

ш,

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au
 www.orford.com.au

382 South St Harristown Queensland 4350 Australia



Do you have an ABN? Contact us for a trade discou

ice machines,



HALF DICE

Hard, clear ice cube with unique "rhomboid" shape 3/8" x 1-1/8" x 7/8" (0.95 x 2.86 x 2.22 cm) in dimension, 96 cubes per pound of ice, maximum cooling with nearly 100% ice to water ratio.



DICE



Hard, clear ice cube with unique "rhomboid" shape 7/8" x 7/8" x 7/8" (2.22 x 2.22 x 2.22 cm) in dimension, 48 cubes per pound of ice, maximum cooling with nearly 100% ice to water ratio.

Hard, clear ice cube with unique "rhomboid" shape 1-1/8" x 1-1/8" x 7/8" (2.86 x 2.86 x 2.22 cm) in dimension, 32 cubes per pound of ice, maximum cooling with nearly 100% ice to water ratio.

REGULAR

GOURMET



Hard, clear, individual ice cube with unique octagon shape 1-3/8" x 1-3/8" (3.49 x 3.49 cm) in dimension, maximum cooling with nearly 100% ice to water ratio.





NUGGET

Easy to chew but hard enough to be dispensed without hand scooping, 3/8" (.95 cm) to 1/2" (1.27 cm) in width and length on average.

TUBULAR NUGGET



FLAKE

Small, soft pieces of ice with a 73% ice to water ratio. Perfect for displaying products and hand scooping into drinks.

CRUSHED



Manitowoc dice or half dice cubes crushed into small pieces using a Manitowoc ice machine and a Servend® beverage dispenser equipped with icepic[™] ice crusher.



Softer texture with good cooling. Cylindrical shaped nugget with 5/8" (1.59 cm) diameter and average length of 1" (2.54 cm) with 90% ice to water ratio.

1300 ORFORD (1300 673 673)

+617 4641 7372

382 South St Harristown Queensland 4350 Australia



Page 74





	Model	21 Air / 10 Water 32 Air /	21 Water Stora	ge Dimensions	RRP ex GST	
			Сарас	ity H x W x D cm		
	UG30	31kg 21	5kg 5.5 K	G 65 X 45 X 48	2950	
	UG50	57kg 43	3KG 14 KG	G 80 X 55 X 55	3690	
	UG65	65kg 58	30 KG	6 90 X 70 X 60	4060	
	UG80	85kg 67	7KG 30 KG	G 90 X 70 X 60	4390	
Levellers supplied with all models (adjustable)						
	Optional adjusta	able Legs (set of 4)	K00345	001 10.1–15.2	200	

24 HOUR Production Octagonal Gourmet Ice Cubes

All units 10amp Power (with 1.82 mt lead)

Uses gravity to drain water away



Hard, clear, individual ice cube with unique octagon shape 3.49 x 3.49 cm in dimension, maximum cooling with nearly 100% ice to water ratio.



GOURMET



UG80

Page 75 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au







orto





Model	21 air / 10	32 air / 21	Storage	Dimensions	RRP Price Ex GST
	water	water	er Capacity	H x W x D cm	
UDE0080A—Full dice	46KG	32KG	14KG	94.04 X 50 X 56.7	4160
Gravity drain					
NEO-u140	55KG	41KG	40KG	97.8 X 66 X 71.1	5320
NEO-u190	79KG	60KG	36KG	97.8 X 66 X 71.1	5530
	07/0	60V0	20110		
NEO-u240	87KG	68KG	36KG	97.8 X 66 X 71.1	5830
NEO-u310	132KG	103KG	45KG	97.8 X 76.2 X 71.5	7420
LEGS X 4 K00445	30MM			Optional	120

Standard legs supplied—Adjustable 15.24—20.33 All units 10Amp power with 2.43 mt Lead

Neo models available in full and half dice at the same price

Specs quoted ae all Full dice. Half dice available on request

The U080 replaces the QM45



Page 76 Back to Index 1300 ORFORD (1300 673 673) +617 4641 7372 sales@orford.com.au





INDIGO Intelligent thinking inside the box.

24Hr production. Full and Half cubes available.

Only Full dice quoted below. Please phone or email for other models.

Model	21 Air / 10 water	32 Air / 21 water	Dimensions (ex bin)	RRP exc GST
Modular Width			H x W x D cm	
IDT-0620 Full Dice (10 Amp)	243 kg	195 kg		7580
IYT-0620 Half Dice (10 Amp)	243 kg	195 kg	55 x 55.9 x 62	7580
Bin models to suit				
i-620 : A320, D420c or D570C*	(*requires adapte	r plate 040004915 RRF	° \$400 + GST)	
A320, D420c or D570c **	(**requires adapt	tor plate K00470 RRI	9 \$790 + GST)	

Model	Storage Capacity	Dimensions	RRP exc GST
D320	120KG	96.5 X 55.9 X 86.4	1910
D420c	174KG	127 X 55.9 X 86.4	2110
D570C	210KG	127 X 76.2 X 86.4	2380

Standard legs supplied with bins—Adjustable 15.24—20.33

All units suit 10 Amp Australian plugs with a 1.82mt lead



Phone: 1300 673 673

Email : sales@orford.com.au



1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au





INDIGO Intelligent thinking inside the box.

24Hr production. Full and Half cubes available.

Model	21 Air / 10 water	32 Air / 21 water	Dimensions	RRP exc GST
Regular Width			H x W x D cm	
IDT-0500A—Full dice 10Amp	227 KG	175 KG	55 X 76.2 X 63	7720
IDT-0750A —Full dice 10Amp	291 KG	251 KG	55 X 76.2 X 63	9290
IYT-0750A —Half dice 10Amp	306 kg	265 kg		
IDT-0900A—Full dice 15 Amp	381KG	312KG	68 X 76.2 X 63	12100
IDY-0900A—Half dice 15 Amp	378kg	336kg		
IDT1200A—Full dice 15 Amp	542KG	429KG	75 X 76.2 X 63	13900
IDY1200A—Half dice 15 Amp	544kg	424kg		

I450 & I606 10Amp power / I906 & I1106 15 Amp power 1.83mt Lead

Bin models to suit	Model	Storage Capacity	Dimensions	RRP exc GST
Adaptor Plate for i-322, i-522 on A400v, A570V bin	A400	166kg	96.5 x 76.2 x 86.4	2090
K00472 (K00365) \$400 + GST	D570C	241kg	127 x 76.2 x 86.4	2380
Adaptor plate for IDT-0450—IDT1200A on A970v Bin	D970C	360kg	127 x 121.9 x 86.4	3390
K00470 (K00458) \$670 + GST				



Phone : 1300 673 673



Page 78 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au

382 South St Harristown Queensland 4350 Australia



indigo Series 1-606 Ice Machine on 8-570 Bin





INDIGO Intelligent thinking inside the box.



Indigo Series I-1400 Ice Machine on B-970 Bin







S-3070C ice Machine - 115V



CVD Condensing Unit - 208-230/60/3



www.icemachines4u.com

1300 673 673



Page 79

1300 ORFORD (1300 673 673) +617 4641 7372

Indigo NXT Series iT1900 Ice Machine on D970 Bin





INDIGO Intelligent thinking inside the box.

24Hr production. Full and Half cubes available.

Only Full dice quoted below. Please phone or email for other models.

Model	21 Air / 10 water	32 Air / 21 water	Dimensions	RRP exc GST
The Wide Boys			H x W x D cm	
iT-1500 20Amp	782 kg	574 kg	74.93 x 121.9 x 62.20	\$15,670
NXT i-1900 Hard wired	828 kg	615 kg	74.93 x 1219 x 62.20	\$21,810

Bin models to suit

l400-l800 : D970C or F1300	Model	Storage Capacity	Dimensions	RRP exc GST
S3070 : F1300	D970C	400 kg	127 x 121.9 x 86.4	3390
	F1300	600 kg	161.3 x 121.9 x 78.7	10,150

Adaptor Plates

D570 bin uses K00472 (K00365) adaptor-RRP \$470+ GST

D970 bin uses K00470 (K00458) adaptor-RRP \$790 + GST



1300 673 673



1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au







Page 81 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au







Flakers

Under Counter Flakers—Head and Bin


Model	21 Air / 10 water	32 Air / 21 water	Storage	Dimensions	RRP exc GST
			Capacity	H x W x D cm	
UFK0200A—10Amp	77kg	63kg	27kg	95 x 50 x 66	\$8,080
UFK0350A—15Amp	152kg	122kg	40kg	101 x 74 x 69	\$8,500

Height includes legs. Standard adjustable legs are supplied 11.43-15.24cm

Modular Flakers—Head Only

Model	21 Air / 10 water	32 Air / 21 water	Dimensions	RRP exc GST
RFK0320A - 15Amp	174kg	130kg	66 x 56 x 60	\$8,380
RFK0620A—15Amp	305kg	248kg	66 x 56 x 60	\$10,740
RFK1300A—15Amp	545kg	396kg	70 x 76 x 60	\$14,500
RFS2378C—15Amp / 3hp Hard-	984kg	772kg	70 x 76 x 60	\$25,030

Bin to Suit Model Storage Dimensions **RRP exc GST** Capacity RFS300A : A320, A430, A570* RFS1200 : D570C* D970C** H x W x D cm A320 97 x 56 x 86 RFS650 : A420, A570* RF2300 : F1300 95kg \$1910 *Requires adapter plate K00472 D420C 141kg 127 x 56 x 86 \$2110 127 x 76 x 86 D570C* 210kg \$2380 **requires adaptor plate K00470 D970C 360kg 127 x 122 x 86 \$3390 F1300 600kg 162 x 122 x 79 \$10,150



Page 82

1300 ORFORD (1300 673 673) +617 4641 7372





Dispensers

Modular Dispensers—Order Ice Maker Separately

Model	Storage Only	Dimensions—Dispenser Only	RRP exc GST
		H x W x D cm	
SPA160 - Ice Dispenser 10 Amp	54kg	122 x 56 x 80	\$9,210
SFA291—Ice & Water Dispenser 10 Amp	82kg	139 x 76 x 82	\$12,240
SPA310—Ice Dispenser 10 Amp	82KG	138 X 76 X 82	\$11,030
DISP500T 10 Amp	250kg	163 x 76 x 134	\$26,200
DISP1000T 10 Amp	450kg	163 x 122 x 134	\$33,200



SFA Ice Dispenser comes with bin inclusive of water valve With 2.43mt LEAD

SPA	Ice Only Dispenser
SFA	Ice & Water Dispenser
SN12A	10 Amp Power
SFA & APS Units	10 Amp Power
т	Timed Agitation

1300 673 673

Page 83 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au









D320C





D420C











F1300

D970C



1300 673 673



Page 84 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au







Model	Storage Only	Dimensions—Dispenser Only	RRP exc GST
		H x W x D cm	
D320c	120kg	97 x 56 x 86	\$1910
D400c	166kg	97 x 76 x 86	\$2090
D420c	174kg	127 x 56 x 86	\$2110
D570C	240kg	127 x 76 x 86	\$2380
K-00472 (K00365)	Adaptor Plate for i-	322, i-522 on D400, D570 bin	\$470
D970C	400kg	127 x 122 x 86	\$3390
K-00470 (K00458)	Adaptor Plate for	ri-450—i1200 on D970 Bin	\$790
F1300	600kg	162 x 122 x 79	\$10,150
F1325	601kg	1368 x 152 x 79	\$10,410

Standard adjustable legs supplied with all models 15.24-20.33



Australia





Nugget Machines



VMK0200A—Nugget Ice Machine



RNK0320A—Nugget Head Bin sold separately



RNK0620A—Nugget Head Bin sold separately



UNK0300A Nugget ice machine



Page 86 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au



Undercounter Nugget—Nugget Machines

	MODEL	MIN 24 HR ICE	PRODUCTION	STORAGE CAPACITY	DIMENSIONS (W X D X H) MM	RRP PRICING EX GST
		21° AIR	32° AIR		(
		10° WATER	21° WATER			
UNK0200A		78KG	53KG	18KG	500 X 660 X 840	\$10,760 + GST
		10 Amp plug	Height include	s legs Standard adju	stable legs are supplie	d (150—200mm)
UNK0300A		136KG	112KG	23KG	738 X 690 X 1000	\$11,950 + GST

15 Amp plug | Height includes legs | Standard adjustable legs are supplied (150-200mm)

Australia

Modular Nugget—Nugget Ice Machines—Head Only

	MODEL	MIN 24 HR ICE P	RODUCTION	HEAD ONLY	RRP PRICING
		21° AIR	32° AIR	DIMENSIONS	EX GST
		10° WATER	21° WATER	(W X D X H) MM	
RNK0320AA		143kg	114KG	559 X 600 X 660	\$10,080 + GST
			15 Amp plug	Bin model : D320 / D420	
RNK0620A		266KG 15 Amp plug	204KG Bin model : D42	559 X 600 X 660 0 / *D570 *Requires Ad	\$12,590 + GST lapter Plate K00472
RNK1100A		474KG	374KG	762 X 600 X 696	\$19,380 + GST
		15 Amp plug	Bin model:D57	e contrasta de la contrasta de	lapter Plate K00470
Page 87 <u>Back to</u>		 1300 ORFORD (1300 673 673) +617 4641 7372 sales@orford.com.au 		382 South St Harristown Queensland 4350	



Manitowoc M Series

The Manitowoc M Series—simple with three controls—on, off and clean

Model	21 Air / 10 Water	32 Air / 32 Water	Dimensions	RRP inc GST
			W x D x H cm	
M420 (10 Amp)	176kg	132kg	55.9 x 62.2 x 54.6	\$5930
Bin to suit : A320, A420 or K570 with adapter K00365				
M500 (10 Amp)	214kg	169kg	76.2 x 62.2 x 54.6	\$6380
Bin to suit : A400 or D570C				
M700 (15 Amp)	290kg	228kg	76.2 x 62.2 x 54.6	\$7390
Bin to suit : A400 or D570C				
M1000 (15 Amp)	437kg	374kg	76.2 x 62.2 x 74.9	\$10,090
Bin to sit : D570C or D970C with adapter K00458				
M1400 (20 Amp Hardwired)	645kg	479kg	121.9 x 62.2 x 74.9	\$13,700
Din to suit + 4070				

Bin to suit : A970



M Series are available in three convenient sizes 22" (55.9cm), 30" (76.2cm) and 48" (121.9cm) with 6 different production ranges from 420 lbs (176 kg) to 1400 lbs (649 kg) of ice

M series ice machines are designed from the ground up to meet your operational demands for a worry-free, simple-to-use, basic ice machine; but that doesn't mean corners were cut on quality.

There are only three controls you need: On, Off and Clean.

And for cleaning, access to the evaporator and food zone is simple with the removal of just two screws and easy, lift-off door.

1.83 MTR Lead



Page 88 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au







Accessories

Indigo Model	Suitable for	RRP excl GST
Luminice 11 Growth inhibitor kit—K00450	i-322—i-1106	1,030
Luminice 11 Growth inhibitor kit—K00451	I-1406—i-1800	1,030
Lunimice 11 Growth Inhibitor kit—K00452	Neo U-140—U310	1,030
Filters	Suitable for	RRP excl GST
BR10—Suit QM45, Sotto and Neo Model Indigo models	i-322—i-1106	210
BR20—Suit Indigo Models I-906—S3070	I-906—S3070	270

Adapter Plates	Suitable for	RRP excl GST
K00472	i-322 / i-522 to A400 / A570 bin	470
K00470	i-450 / i-1200 to A970 bin	790
Accessories	Suitable for	RRP excl GST
K00063—Castor kit for NEO machines	NEO Ice machines	640
K00461—External Ice Scoop Holder	All ice bins	273



1300 673 673



1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au





H

Manitowoc Ice Machines

Manitowoc	Castor Ki	ts & Ice Bagge	ers
	Caster Kit	Suitable for	RRP excl GST
	K00138	A400 / A570bin	720
	K00063	Neo Ice Machines	370
	Ice Bagger Assembly	Order Code	RRP excl GST
	Ice Bagger	K00146	\$840

Manitowoc Commercial Warranty

Model	Parts	Labour
Sotto	2yr	1yr
Neo	5yr evaporators	5 year evaporators
	5 year compressor	3 year compressor
	3 yr dispenser	3 year dispenser
Indigo	5yr evaporators	5 year evaporators
	5 year compressor	3 year compressor
	3 yr dispenser	3 year dispenser
QM	Зуr	Зуr



Page 90 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au





Equipment Finance

Preserve Working Capital with Orford Finance

Phone 1300 673 673

Do you have an ABN? Contact us for a trade discount





a lease contract over five yes



YOURS TODAY: EB45R-Sn



based on a lease contract over five yea

PROPERTY FINANCE

YOURS TODAY: FMB30



th approval. Payments based on a lease contract over five years with a 5%



PINANCE



Page 91 Back to Index 1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au





Aftermarket Solutions

REFRIGERATION



Decal Sets

RRP -\$240 + GST

Orford can arrange for your artwork to be printed 2 long decals (side) + 2 short (front) decals Email : sales@orford.com.au

Promote your Brand — Phone 1300 673 673











1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au

382 South St Harristown Queensland 4350 Australia



REFRIGERATIO



Terms and Conditions

Roderick Abif 1 Pty Ltd (ABN 72 150 865 008) Trading as Orford Refrigeration

1. TITLE

Risk in any goods supplied by the seller to the buyer shall pass when such goods are delivered to the buyer or into custody on the buyers behalf but the ownership of any goods supplied by the seller to the buyer shall remain with the seller until payment in full is made for the goods.

2. WARRANTIES AND REPRESENTATIONS

All new goods supplied are warranted to be free from defects in material and workmanship for a period of 12 months from time of invoice.

The seller is not liable for any injury, loss or damage, directly or consequential, arising out of the us of or the inability to use the goods

Before using, the buyer shall determine suitability of the goods for the buyers intended use and assume all risk and liability

3. ACCEPTANCE

An offer or quotation by the seller shall become binding upon the seller upon written or verbal acceptance of the quote or of the goods discussed verbally. Acceptance of the goods is deemed to be acceptance of these terms and conditions

4. REJECTION

Except for defective goods supplied by the seller, goods cannot be rejected. Goods damaged during transit on the buyers own transport are not covered by Orford Foods Services insurance.

5. MANUFACTURERS SPECIFICATION

Due to continuous improvement processes, product specifications may change without notice from time to time

All pricing shown in Orford catalogues are exclusive of GST, freight and insurance

6. FREIGHT

Orford Refrigeration offers a freight option on the following terms

- \Rightarrow goods are delivered to a loading dock or similar
- \Rightarrow All relevant details that could present a delivery challenge are revealed prior to the delivery
- ⇒ The carrier working on behalf of Orford Refrigeration has the right to refuse to complete the delivery if the site is found to be unsafe, cluttered, or the goods are unable to fit through door ways or if there are steps, stairs, or moats with crocodiles.







halo.



Page 93 <u>Back to Index</u>

0

c



Terms and Conditions

Warranty

Roderick Abif 1 Pty Ltd (ABN 72 150 865 008) Trading as Orford Refrigeration

This warranty applies for calls of a breakdown service nature only, for problems of manufacturing origin. Recalls,

customer related problems (power supply fluctuations, thermostat adjustments, overstocking and over loading of shelves / baskets, choked condenser etc) and any other non warranty nature calls will be charged to the service call

originator at normal full rates, payable at the time of the service call.

This warranty is voided, if the equipment has not been properly maintained in accordance with the manufacturers

instructions supplied with the equipment, or the equipment has been subject to power supply fluctuations, misused or transported in a manner which could prejudice the correct operation of the appliance.

Orford does not reimburse or pay for costs relating to travel time, callout or attendance fees, overtime / penalty or

premium labour rates or any other costs incurred or charged.

Orford does not reimburse for loss of stock, damage or expense directly or indirectly incurred.

Orford Refrigeration does not cover travel time in excels of one (1) hour and does not cover any work performed on equipment which is located OFF the Australian Mainland or Mainland Tasmania.

Orford does not cover labour costs of maintaining, adjusting or cleaning

Orford does not accept the cost of work undertaken without the permission of Orford

The standard Orford Refrigeration warranty on refrigeration cabinets and ice machines is 12 months parts and labour unless expressly agreed. This clause must be read within the context of all other clauses and not referred to exclusively.

Excluded from Orford warranty are all consumable items such as glass, gaskets, lights, elements, locks, keys, accessories, decals

All warranty work must be authorised in advance by contacting the Customer Service Department on

- ⇒ Phone 1300 673 673 (1300 ORFORD)
- \Rightarrow Email : mail@orford.com.au
- \Rightarrow Www. Orford.com.au





REFERENCE RATION

Contact us for a trade discoun

z o

RA

c

2

w

2

Do you have an AB





CABINET CLASS is a combination of Climate Class and Temperature Class as per the requirements of Australian Standard AS1731

e.g.:- 3L1, 4L2, 5L3 etc.

CLIMATE CLASS defines the climatic ambient conditions for which the cabinet is suited.

Refer table below.

Climate Class	Ambient Temperature	Ambient Humidity
	₅C	% RH.
3	25	60
4	30	55
5	40	40
6	27	70
7	35	75

TEMPERATURE CLASS defines the temperature at which the appliance is capable of maintaining product, at a particular Climate Class as per the requirements of Australian Standard AS1731.

Refer examples below:

L1

At the above climate class product temperatures can be maintained between –15°C and -18°C.

As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5 Table 1.

L2

At the above climate class product temperatures can be maintained between –12°C and –18°C.

As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5 Table 1.

L3

At the above climate class product temperatures can be maintained between –12°C and -15°C.

As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5 Table 1.



Do you have an ABN

<u>Contact us for a trade</u>

Page 95 Back to Index













Minimum Energy Performance Standard (MEPS)

Why it Matters



96 Back to Index

www.orford.com.au



MEPS—Why it Matters

What are the Consequences if products do NOT comply

The regulator can

- \Rightarrow Suspend a model's registration
- \Rightarrow Cancel a models registration
- ⇒ Enforceable undertakings
- \Rightarrow Infringement notices
- \Rightarrow Civil penalty orders
- \Rightarrow Injunctions

The regulator can publicise details relating to enforcement responses including the names of registrants and the model numbers of the products

Protect Yourself

Check that the cabinet is registered for MEPS / GEMS

- \Rightarrow refer to the MEPS website <u>reg.energyrating.gov.au/comparator/product_types</u>
- ⇒ Research the cabinets MEPS figures on the MEPS website. If for example the MEPS figure is 5.8 (kWh/24hr/m2), this means the amount of total energy consumption over a 24 hour period per square metre of display area
- ⇒ If you cant find the cabinet on the MEPS site, assume it is NOT registered and therefore not legally able to be sold or used in Australia and / or New Zealand











Page 97 Back to Index

0

<

~

В – С

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au
 www.orford.com.au





MEPS—Why it Matters

Which cabinets are covered by the compulsory MEPS / GEMS

Open Face

Reach in cabinets

Food & Deli display cabinets

Bar Fridges

Glass door Merchandisers





Reference Http://www.orford.com.au/orford-eb-energy-figures.html

M1

At the above climate class product temperatures can be maintained between -1°C and +5°C. As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5

M2

At the above climate class product temperatures can be maintained between -1°C and +7°C. As per Australian Standard AS1731.5: 2003 and AS1731.6: 2003. 5













0

RA

EFRIG

1300 ORFORD (1300 673 673)
 +617 4641 7372
 sales@orford.com.au
 www.orford.com.au



Orford Refrigeration ABN 72 150 865 008 Head Office & Postal Address 382 South St, Harristown, Qld 4350 sales@orford.com.au

National sales Cabinets: Free Call: 1300 ORFORD (1300 673 673) Sales Office: 07 46 345 278 Email : jeffash@theorfordgroup.com.au

Orford Refrigeration Brisbane Office 39 Dunhill Crescent Morningside, Qld, 4170 Phone: 1300 ORFORD (1300 673 673)

Open Monday & Tuesday by appointment

National Spare Parts Sales Free Call: 1300 ORFORD (1300 673 673) Email : parts@orford.com.au



Website :

www.orford.com.au

Www.facebook.com/orfordref

Www.instagram.com/orfordrefrigeration/

Key Patents:

AUS DSN no 345317

Patent No 2013100761

"Orford" is protected by Trademark No 1452870

All images are subject to copyright and cannot All efforts are made to ensure the accuracy of information, but from time to time errors may occur. Please check prior to placing orders. This publication serves as a guide to the Orford and partner products. Readers are encourage to contact Orford prior to making final purchasing decisions

0

ntact us for a trade discou

Do you have an ABI



Www.orford.com.au

Www.orfordspareparts.com.au

be reproduced without permission

Page 99

