


Precision Leveler EcoMaster® 30

for sheet metal parts up to 5 mm thick

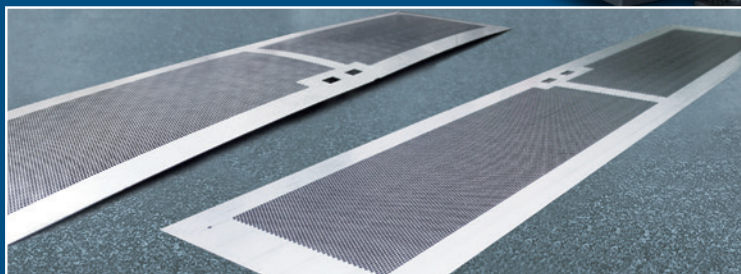


▲
before

▲
after

Machine type	EcoMaster® 30 30	EcoMaster® 30 50	EcoMaster® 30 80	EcoMaster® 30 110	EcoMaster® 30 130
Part thickness (mm)	0.3 – 5.0	0.3 – 5.0	0.3 – 5.0	0.3 – 5.0	0.3 – 5.0
Max. part width (mm)	300	500	800	1,100	1,300
Min. part length (mm)	65	65	65	65	65
Leveling speed (m/min)	3 – 20	3 – 20	3 – 20	3 – 20	3 – 20
Quick-change system	standard	standard	standard	standard	standard
Automatic setting	optional	optional	optional	optional	optional
CE-Certification	standard	standard	standard	standard	standard
Dimensions (mm) (length x width x height)	2,000 x 1,700 x 2,000	2,000 x 1,800 x 2,000	2,000 x 2,000 x 2,000	2,000 x 2,200 x 2,000	2,000 x 2,700 x 2,000
Total weight (kg)	3,500	3,800	4,000	5,000	6,000


ARKU Maschinenbau GmbH
 Siemensstr. 11, 76532 Baden-Baden, Germany
 Phone: +49 72 21 / 50 09-0
 Fax: +49 72 21 / 50 09-11
 info@arku.com, www.arku.com

ARKU
 Technology made with passion

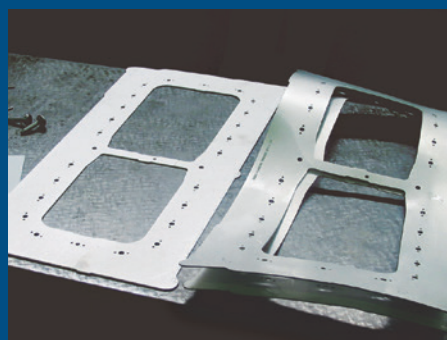

EcoMaster® – Consistent leveling results. Ideal for the use in the automotive industry, laser job shops and aerospace industry.

Leveling performance diagram EcoMaster® 30

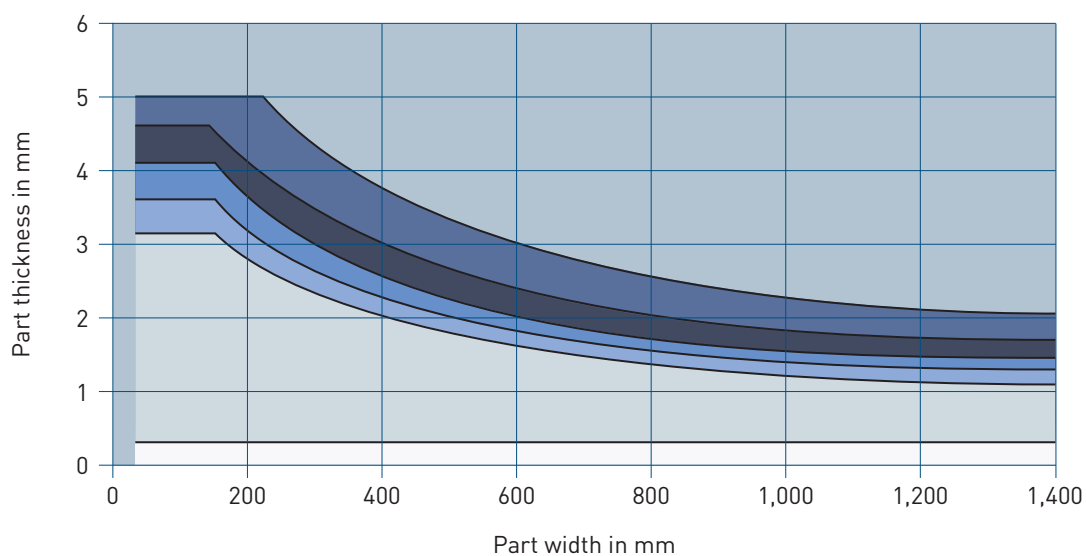

yield point $R_{p0.2}$

- 220 N/mm^2
- 360 N/mm^2
- 480 N/mm^2
- 600 N/mm^2
- 800 N/mm^2
- lower limit at 400 N/mm^2

Valid for material with at least 5% elongation.

Disclaimer: The values, shown in the leveling performance diagram, are based on experience. In practice, the values can diverge from the diagram shown alongside.