


RC/N100 mobile container

Convenient and effective collecting

- > Two doors design easy for loading/unloading
- > Can be nested to save space

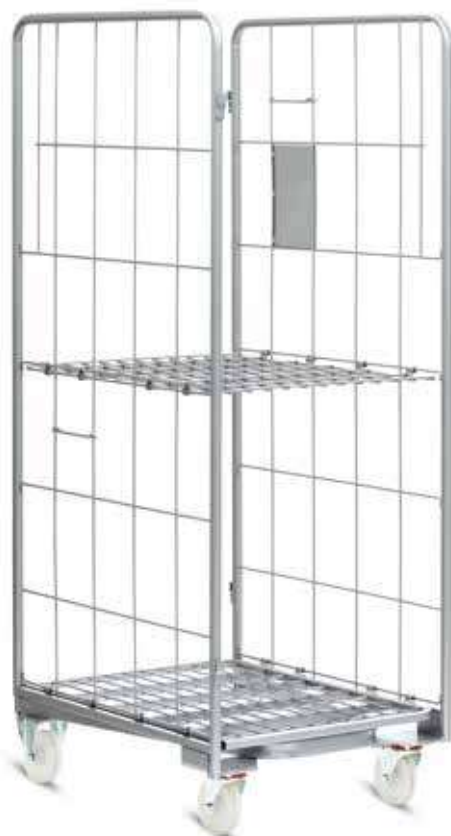

RC/N100 basic model with additional wire shelf (accessory)

Can be nested to save space


Space requirement in row

| | |
|----------------------|-----------|
| Per mobile container | 260 mm |
| 10 mobile containers | 3,185 mm |
| 50 mobile containers | 13,585 mm |



Wire shelf (optional)

Wire shelf can be fixed on side panel and can be folded together with the mobile container



Door with accessories (optional)





2 doors are equipped for a closed space.



Standard equipment: Chassis made of square tube frame, with bottom tray that can be folded up at the side. Side panels made of square tube frame with welded wire grate. Side panels rotatable around A frame. 2 doors can be folded at the side for nesting

Castors: 2 fixed and 2 swivel castors made of polyamide.

Finish: 1. Zinc plating + transparent powder coating.
2. Color powder coating.
3. Zinc plating.

| | RC/N100 | RC/N100 | RC/N100 |
|---|--|---|---|
|  |  |  |  |
| Order no. | 06.91 644.52/73/50 | 06.91 418.52/73/50 | 06.82 491.52/73/50 |
| A x B x C, length x width x height (mm) | 860 x 670 x 1,600 | 860 x 670 x 1,700 | 860 x 670 x 1,800 |
| D, loading height (mm) | 1,370 | 1,470 | 1,570 |
| Mesh size (mm) | 275 x 165 | 275 x 165 | 275 x 165 |
| Castor Ø (mm) | 125 | 125 | 125 |
| Total load capacity / per shelf (kg) | 400 / 75 | 400 / 75 | 400 / 75 |
| Weight (kg) | 32 | 33 | 34 |
| Accessories | | | |
| Wire shelf | 77.38 475.52 | 77.38 475.52 | 77.38 475.52 |
| Door with accessories | 77.67 104.52 | 77.58 742.52 | 77.38 136.52 |
| Textile tension belt | 77.66 293.00 | 77.66 293.00 | 77.66 293.00 |