

## Performance

Platform Height	5.80 m
Platform Capacity	275 kg
Capacity on Platform Extension	120 kg
Occupants (Indoor/ Outdoor)	2 /1
Lift/Lower Time	24/26 Seconds
Maximum Drive Height	Full Height
Weight*	1565 kg
Ground Bearing Pressure	10.5 kg/cm <sup>2</sup>
Drive Speed–Elevated	0.8 km/h
Drive Speed–Lowered	6.4 km/h
Gradeability	25%
Turning Radius (Inside)	Zero
Turning Radius (Outside)	1.7 m

\* Certain options or country standards will increase weight.

## Standard Specifications

### Power Source

Battery	Single 24V Lithium Ion, 72 Ah
Charger	27 amp
Drive	24V Electric Front Wheel

### Lift & Steer System

Lift System	Fully Electric
Steer System	Fully Electric

### Tyres

Tyre Size/Type (Non-Marking)	323 x 100 mm
------------------------------	--------------

### Brakes

Multi-Disc Friction

## Standard Features

- 5-Year Lithium Ion Battery Warranty
- 650W CAN-Charger (3.5 hr full charge)
- AC Electric Drive
- AC Receptacle in Platform
- Active Pothole Protection System
- All Motion Alarm
- ANSI A92.20 Compliant
- Battery Condition Indicator
- CAN-Enabled Charger
- DaVinciGO App For Intelligent Diagnostics
- Diamond Tread Steel Deck
- Drive Motor Covers
- Dynamic Braking
- Electric Brake Release
- Foot-Actuated Deck Extension
- Fork Lift Pockets
- Greaseless Kingpin Joints
- Horn
- Hourmeter
- JLG® Mobile Control
- Lanyard Attach Points
- Lifting and Tie Down Points
- Load Sensing System
- Lubrication Free Scissor Arm Bushings
- Manual Descent Cable
- Movable, Removable Platform Control
- Nickel Plated Pins
- Proportional Controls
- Quick Charge
- QuikFold Rails
- Removable Ladder
- Scissor Maintenance Prop
- Self-Closing Gate
- Steel Drop-Down Doors
- Tilt Alarm and Light
- Flashing Amber Beacon
- LCD Platform Control Box
- USB Charger & Phone Holder
- Variable Tilt Visual Zone Indicator
- Zero leak points




## Accessories & Options

- Fire Extinguisher
- Anti-Vandalism Package
- Ambient Noise (Squawker) Alarm
- AC Outlet To Platform incl. ELCB
- ClearSky
- SkySense
- Mobile Control
- Pipe Racks
- Panel Carrier

## DIMENSIONS

All dimensions are approximate

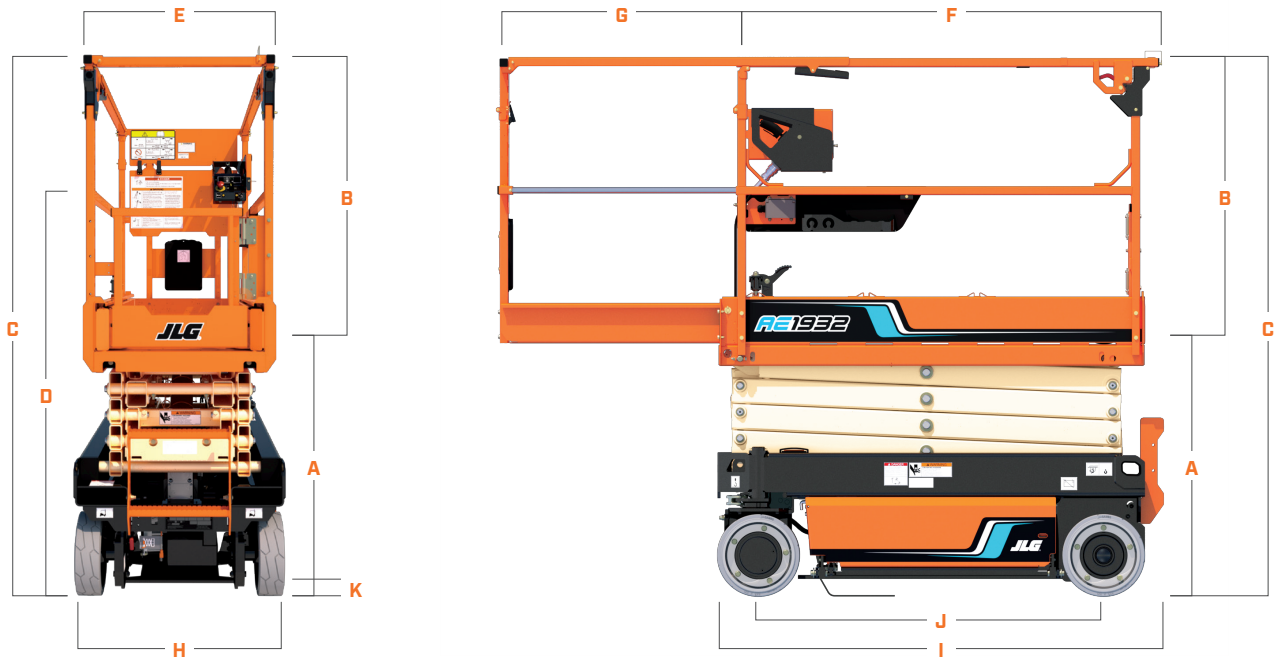

<b>A.</b> Platform Height (Lowered)	0.98 m
<b>B.</b> Platform Railing Height	1.28 m
<b>C.</b> Machine Height (Rails Raised)	2.11 m
<b>D.</b> Machine Height (Rails Lowered)	1.99 m
<b>E.</b> Platform Width	0.64 m
<b>F.</b> Platform Length	1.59 m

<b>G.</b> Platform Extension	0.91 m
<b>H.</b> Machine Width	0.81 m
<b>I.</b> Machine Length	1.70 m
<b>J.</b> Wheelbase	1.30 m
<b>K.</b> Ground Clearance	0.07 m



### The JLG "2 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "2 & 5" Warranty. We provide coverage on all products for one (2) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

R090122

**JLG Industries (Australia)**  
 358 Park Road  
 Regents Park, NSW 2143  
 Telephone 02 8718 6300  
 Fax 02 8718 6377  
[www.jlg.com.au](http://www.jlg.com.au)

**An Oshkosh Corporation Company**