
specifications



RF7.UPF.2.SD

ReFlex Series, 2 Door (Solid), Upright Freezer



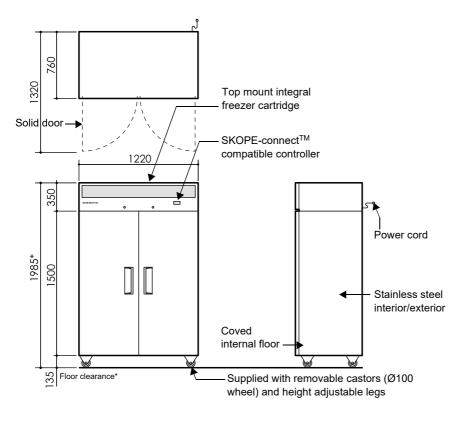

CABINET

Model ID RF7.UPF.2.SD RF7UPF2-SCTP-SD

Doors 2 × self-closing, lockable, solid swing doors. LH, RH 2 × door openings: 1375mm high × 495mm wide

Shelves 10 × adjustable height shelves: 530mm wide × 530mm deep

Worktop n.a.

Material 304 AISI stainless steel interior and exterior

PERFORMANCE

Max. ambient temp. 40°C

Temperature range Less than -18°C

ELECTRICAL

Climate class 5 (40°C/40% RH)

Interior lighting

Power cord

Power supply

Current draw

2 × 1200mm, 12W LED light (door activated)

Supplied with 2.9m, 10 Amp plug and lead

220-240 Volts a.c. 50 Hz, single phase supply

4.0 Amps (includes unit 2.0 Amps)

REFRIGERATION

Controller SCS Connect (SKOPE-connectTM compatible)

Connectivity interface Bluetoot

number UTKDDI-0020)

Refrigerant R404A / 440g Nominal capacity 600 Watts

Drainage No plumbing required

DIMENSIONS

	External	Internal
Height	1985mm*	1395mm
Width	1220mm	1100mm
Depth	760mm	640mm
Floor area	0.93m ²	
Weight	171kg	
Internal volume	982 litres	

With supplied castors fitted. See height variation below

Height variation	
Supplied castors	1985mm
Supplied height adjustable legs	1995-2035mm
No castors or legs	1850mm

Dimensional tolerances				
Before installing this cabinet allow the following dimensional tolerances:				
Linear dimensions	Overall cabinet dimensions			
Less than 1 metre	±5mm			
More than 1 metre	-5mm to +10mm			
	Length of multiple cabinets			
	At each joint	At each end wall		
Less than 1 metre	±5mm	+15mm		
More than 1 metre	-5mm to +10mm	+15mm		

Ventilation requirements	
Тор	300mm
Sides	Not required
Back	Not required
Bottom	Not required

 $\textbf{SKOPE Industries Limited reserve the right to alter specifications without notice. Copyright @ 2019 \, \textbf{SKOPE Industries Limited} \\$



PSS0591 Rev. 0.6 DRAFT May 2019



SKOPE INDUSTRIES LIMITED