



since 1946

Ernest Fleming
machinery & equipment pty ltd

Website: www.fleming.com.au

Phone: (+61) 02 9427 3270

Email: sales@fleming.com.au

Address: 7/27 Mars Rd, Lane Cove West, Sydney NSW 2066 Australia

EFCA-ET-65

Flamingo Automatic 4 wheel - Digital Torque Capper

Flamingo Automatic 4 wheel Capper has Digital torque adjustment ability. The capper suitable for trigger caps, duck bill caps, pumps and screw on caps in pharmacy, food & beverage, pesticide, cosmetic, chemical and other industries. The automatic capping machine can work individually or integrated in production lines with liquid filling machines, powder filling machines using manual or automatic cap placers.

The reliability, ease of operation and change-over procedure and flexibility of installation are the most important advantages of the capping machine. Only a few parts need to be changed when the capping machine is required for different size caps. Moreover, the capper has 60 pre-saved programs to recall for different size of bottles and cap change-overs.

Digital Torque adjustment

The servo controller for the capping process precisely monitors the application torque. This ensures that caps are applied at a constant force and gives results of perfectly fitted caps. Moreover, the capper has Digital Speed adjusted twin grip belts to feed bottles and hold bottles for continuous process of capping which eliminates lost production.

Benefits

- Easy cap size adjustment
- Cap angle aligner press before screw
- Digital Torque adjusted double capping Servo-motors
- Simple operation
- User Friendly interface



60 pre-saved PROGRAMS for different size caps and bottles



Servo driven Bottle clamp belt mechanism- 2"



Easy change over Recall measurements

Specifications

production speed	b/m	20-80
input voltage	V	240V/50-60Hz
air source required	bar	6-8
cap size (diameter)	mm	20-110
torque	n	0.5- 5
width	mm	1300
height	mm	1850
length	mm	2400
weight	kg	160

* Please confirm specifications on order as features may change

EFCA-EC-100

Flamingo Automatic Electric Cap Tightener with Chuck




EFCA-ET-65R

Flamingo Automatic 4 Wheel Cap Tightener



EFCB-AC-65

Flamingo Benchtop 4 Wheel Capper

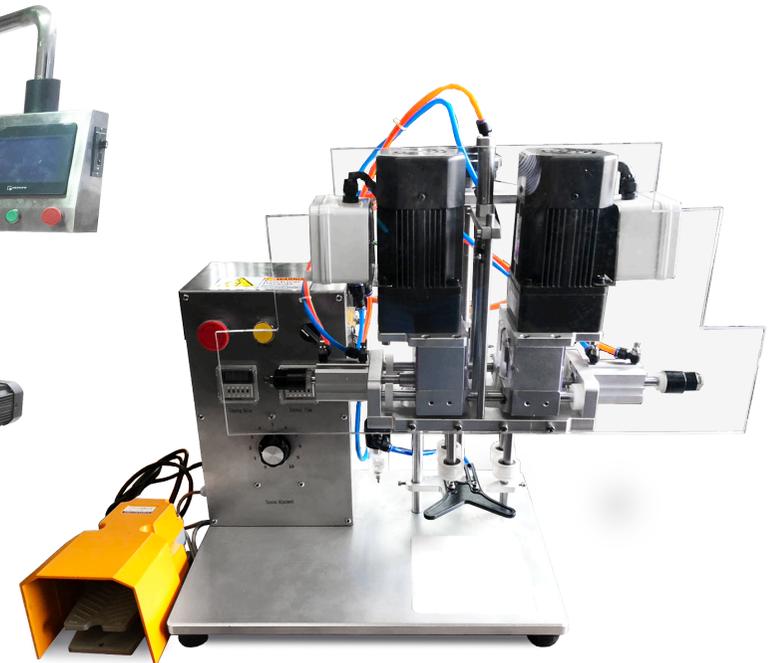

production speed	b/m	10-30
input voltage	V	240V/50-60Hz
air source required	bar	6-8
cap size (diameter)	mm	20-150
torque	n	0.5 - 3
width	mm	1200
height	mm	1650
length	mm	2000
weight	kg	140

* Please confirm specifications on order as features may change

production speed	b/m	10-40
input voltage	V	240V/50-60Hz
air source required	bar	4-6
cap size (diameter)	mm	20-100
torque	n	0.5 - 3
width	mm	1200
height	mm	1650
length	mm	2000
weight	kg	140

* Please confirm specifications on order as features may change

production speed	b/m	10-30
input voltage	V	240V/50-60Hz
air source required	bar	4-6
cap size (diameter)	mm	20-120
torque	n	0.5 - 2
width	mm	600
height	mm	850
length	mm	500
weight	kg	30

* Please confirm specifications on order as features may change