



POWERREX SL5600A Wheel alignment scissor lift with two jack for wheel free operation


POWERREX
KOREA®



Feature

- ❑ Compatible with All Alignment System on the market (Infrared rays, CCD, 3D)
- ❑ Lockable covered rear slip plates (improved safety with H-beam structure)
- ❑ Lattice type P.O.M bearing structure for accurate alignment
- ❑ 90mm extended width for more compatibility
- ❑ Accurate lock gear automatically engage when lift is raised
- ❑ 4 hydraulic cylinder synchronization for maximum power & stability
- ❑ Easy to adjust balance with synchronization valves
- ❑ Individual control switch on each rolling jack
- ❑ Cable remote control included

Dimension

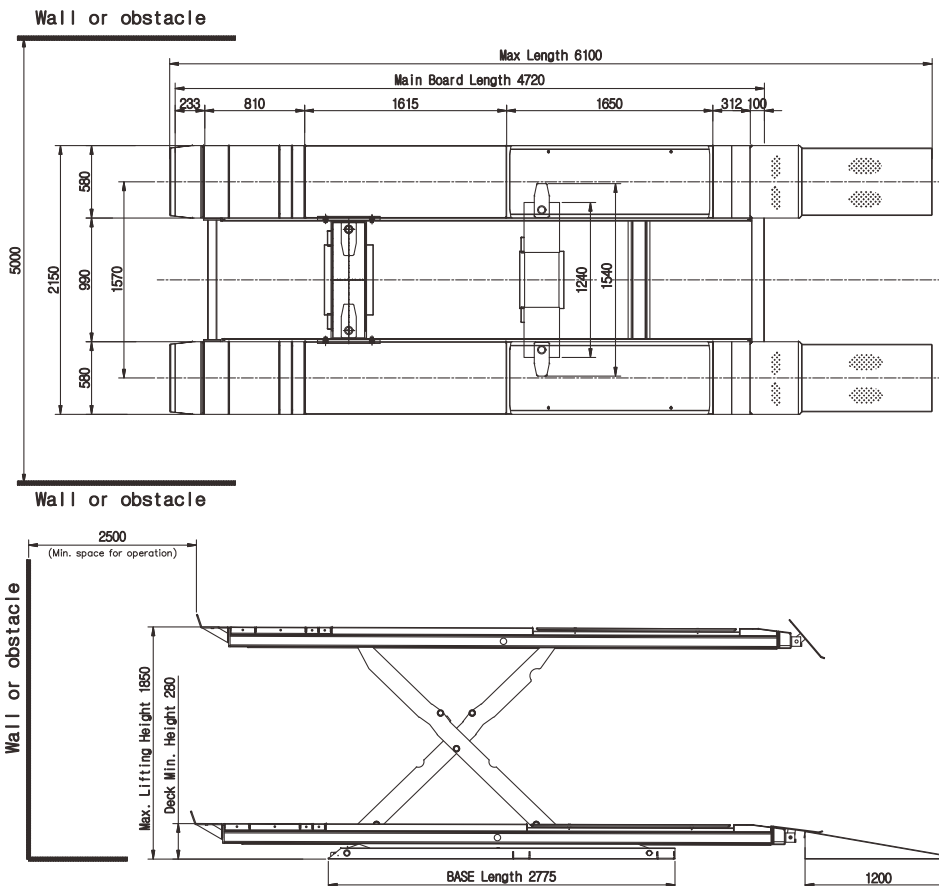

Specification

Max(Capacity)	4,500kg	Jack	2,000kg
Max. Height	1,850 mm	Jack	605mm
Min. Height	280 mm	Jack	275mm
Dimension(mm)	2,150 WX6,090 LX1,850 H		
Platform Width	580 mm		
Width Between Platform	990 mm		
Minimum Height	280 mm		
Power & Motor	optional	Single 2.5HPx3Px220Vx50/60Hz	
	standard	3phase 2HPx5Px220V/380Vx50/60Hz	

INTEREQUIP
INTEREQUIP PTY LTD.

www.interequip.com.au
E-mail: info@interequip.com.au
TEL: Australia 18000EQUIP (1800 037 847)