SPECIAL FEATURES

- Easy Modular construction in-ground or above-ground
- Large LED external display panel (cord or wireless connection)
- Zemic Load Cells Rated at 40
 Ton per cell
- Readings and printouts from Monitor

BENEFITS

- Check truck axle weights before leaving farm
- Choice of 8m, 12m, 16m or 20m
 Bridge
- Weigh livestock and hay
- Monitor fertilizer and grain usage
- Improve feedlot accuracy
- Weigh scrap steel

IAN EVANS 0427 180 673 IAN@TOUGHINDUSTRIAL.COM.AU KAHIL EVANS 0400 459 097 Kahil@Toughindustrial.com.au







TECHNICAL SPECIFICATIONS

Standard Weigh Bridge - 50 Ton

Overall Dimension Length 8 m Width 3 m Deck Height 390 mm

Deck Thickness 10mm Checker Plate
Total Component Weight 3,600 kg

Bridge

Max Weight 60 Ton
Type Zemic Load Cells
Powered 240V or Solar/Battery Powered

Road Train Length Weigh Bridge


Overall Dimension Length 20 m

Width 3 m

Deck Height 390 mm
Deck Thickness 10mm Checker Plate
Total Component Weight 9,000 kg

Bridge

Max Weight 60 Ton
Type Zemic Load Cells
Powered 240V or Solar/Battery Powered

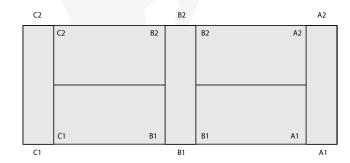

Prices exclude GST