



Model: PSS-BC40DPBR

Features

- 18mm threaded cylindrical mounting, easy to install
- Short case for small installation space;
- Big knob design for easy adjustment
- IP67 protection, suitable for harsh environments
- Visible red spot for easy installation and debugging;

Part Number


NPN NO/NC	PSS-BC40DNBR	PNP NO/NC	PSS-BC40DPBR
-----------	--------------	-----------	--------------

Technical Specifications

Detection type	Diffuse reflection	Hysteresis	3...20%
Rated distance	40m	Indicator	Green LED: power, stable Yellow LED: output, short circuit or overload
Light source	Red light (640nm)	Anti-ambient light	Anti-sunlight interference $\leq 10,000\text{lux}$; Incandescent light interference $\leq 3,000\text{lux}$
Spot size	15*15mm@40cm	Operating temperature	-25...55 °C
Output	NPN NO/NC or PNP NO/NC	Storage temperature	-35...70 °C
Response time	$\leq 0.5\text{ms}$	Protection degree	IP67
Supply voltage	10...30 VDC	Certification	CE
Consumption current	$\leq 20\text{mA}$	Material	Housing: PC+ABS; Filter: PMMA
Load current	$\leq 200\text{mA}$	Annex	M18 nut (2PCS), instruction manual
Voltage drop	$\leq 1\text{V}$		
Circuit protection	Short-circuit, overload, reverse polarity protection		
Connection	2m PVC cable		
Distance adjustment	Single-turn potentiometer		
NO/NC adjustment	White wire is connected to the positive pole or hang up, NO mode; White wire is connected to the negative pole, NC mode		

Remarks: 1.Detection object is 90% white card with size 20cm * 20cm;
2.The green LED becomes weaker, which means that the signal is weaker and the sensor is unstable; The yellow LED flashes, which means that the sensor is shorted or overloaded;

Dimensions

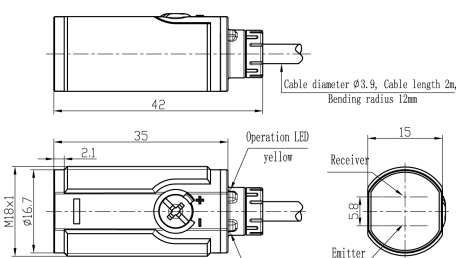

Wiring Diagram

