

PM-60
Pulse Oximeter

Technical Specifications

Safety
Meet the requirements of IEC60601 series,
CE marking according to MDD93/42/EEC

Type of Protection Class II with internal electric power supply
Degree of Protection BF (defibrillation proof)
Protection Against Ingress of Liquid: IPX2

Dimension and Weight
Dimension 55(W)X120(H)X30(D)mm
Weight Maximum weight 300g
 (With battery)

Operation Environment
Temperature 0~40℃
Humidity 15~95%(non-condensing)

Storage Environment
Temperature -20℃ ~ +60℃
Humidity 10% ~ 95%
 (Non-condensing)

Performance Specifications
Display 2.4" color TFT
Resolution 320×240
Multi displays selectable Standard screen display
 Waveform display
Trace 1 plethysmogram waveform
Indicator Alarm indicator light
 Power indicator light
 Pulse tone
 Alarm sound
 Button tones

Interface One dual-purpose socket for
 connecting SpO2 sensor and
 communication cable.

IR interface Infrared link allows downloading
 realtime patient data to computer

DC Power interface Charger stand for Li-ion battery
DC Power Requirements Input voltage 5V DC

Order Information

Part Number	Description
0852B-01000	Main unit (with standard reusable sensor)
0852-10-77701	Carrying case
0852-21-77412-53	Protective cover
0852-30-77503	Battery charging kit (Euro)
0852-30-77504	Battery charging kit (US)
0852-30-77505	Battery charging kit (UK)
0852-30-77531	Pole mounting kit
0852-30-77491	Data management kit

Partial list of choices, for more details please refer to the price list.

Battery Power 1.2A
 Li-ion Battery
 2 hours for charging;24 hours for
 continuous working

Trend memory AA batteries
 (for 3 pieces)36 hours for
 continuous working

 Monitoring mode
 Resolution: 2s
 Maximum time: 96h

 Spot-Check mode
 Review of up to 4,000 data;
 measure up to 99 patients

Alarm User-adjustable High and Low limits
 3-level audible and visual alarm

SpO2
Measurement range 0~100%
Resolution 1%
Accuracy ±2%(70~100%,Adult/Pediatric)
 ±3%(70~100%,Neonate)
 0~69% unspecified

Alarm range 50~100%
Refreshing rate 1 s
Averaging time 7 s (Sensitivity set HIGH)
 9 s (Sensitivity set MED)
 11 s (Sensitivity set LOW)

Pulse Rate
Range 18~300bpm
Resolution 1bpm
Accuracy ±3bpm(non-motion)
 ±5bpm(motion)

Alarm range 18~300bpm
Refreshing rate 1 s
Averaging time 7 s (Sensitivity set HIGH)
 9 s (Sensitivity set MED)
 11 s (Sensitivity set LOW)

Selectable Sensors



mindray

PM-60
Pulse Oximeter



Distributed by: LSR Healthcare Pty Ltd
www.LSRHealthcare.com.au
enquiries@lsrhealthcare.com.au
1300 859 767

mindray
healthcare within reach

PM-60

Pulse Oximeter

Parameters: SpO₂, PR




Spot Check Mode

- Auto-standby and power off during the idle status
- Auto-increase the patient IDs
- Non-alarm setting for "sensor off" occasion

Continuous Monitoring Mode

- Regular alarm handling
- Enable to input patient ID manually
- View SpO₂ waveform

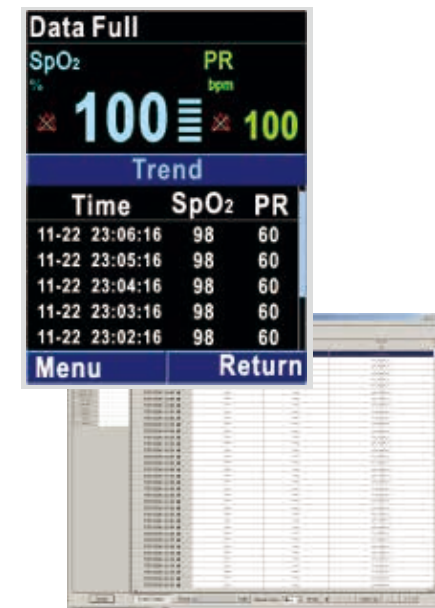

Data Storage and Management Functions

- For you to easily keep and view patient data.
- Spot check: 1~99 IDs with total 4000 sets of measurement
 - Continuous monitoring: maximum 96 hour trend

All data can be transferred to a PC through a Windows-based software for review and regular printing.

- Suitable for adult, pediatric and neonatal patients
- High resolution 2.4" color LCD display
- Two selectable working modes: spot check and continuous monitoring
- Adjustable audible and visual alarms
- Real time data transfer by infrared technology
- Batteries to support up to 36 hour continuous working
- Protective cover and carrying case perfect for portable monitoring needs



Protective Cover



Carrying Case



Charger Stand



Distributed by: LSR Healthcare Pty Ltd
www.LSRHealthcare.com.au
enquiries@lsrhealthcare.com.au
 1300 859 767