

### Product Information


- Monoblock refrigeration system, for improved performance and ease of servicing
- Adjustable digital temperature controller (0°C - 6°C)
- Unique fan forced ducted cooling for uniformed performance throughout the entire refrigerator
- Protective coating on refrigeration coil to help prevent corrosion
- Environmentally friendly R290 Hydrocarbon refrigerant
- Efficient LED lighting for increased product visibility
- Stainless Steel worktop as standard, 840mm finish height. (Optional 900mm working height model available)
- 1/1GN shelf configuration with adjustable runners (2 shelves per door)
- 60mm CFC free polyurethane insulation
- Efficient and hygienic cleaning made easy with an innovative internal design
- High quality components including highly efficient compressors and EC fans
- Self-closing, lockable doors
- Removable filter for easy cleaning
- Equipped standard with lockable castors designed for heavy-duty use
- 3 and 4 door models also available, with glass or solid doors



**Designed & Engineered in Australia to meet Australian Standards**  
**24 Months on-site parts and labour warranty**

### Specifications

|                               |                                         |
|-------------------------------|-----------------------------------------|
| <b>Model</b>                  | AXR.UCGN.2                              |
| <b>W x D x H (mm)</b>         | 1360 x 700 x 840                        |
| <b>Weight</b>                 | 102kg                                   |
| <b>Packed Dimensions (mm)</b> | 1390 x 730 x 880                        |
| <b>Packed Weight</b>          | 121kg                                   |
| <b>Net Capacity</b>           | 184 Litres                              |
| <b>Operation</b>              | 0°C - 6°C                               |
| <b>Refrigerant</b>            | R290                                    |
| <b>Climate Class</b>          | 4M1                                     |
| <b>Energy Consumption</b>     | 3.01kWh/24hr                            |
| <b>Max Ambient</b>            | 40°C                                    |
| <b>Total Connected Load</b>   | 0.33kW                                  |
| <b>Electrical Connection</b>  | 1Ø+N+E 230VAC / 50Hz<br>10A plug & lead |

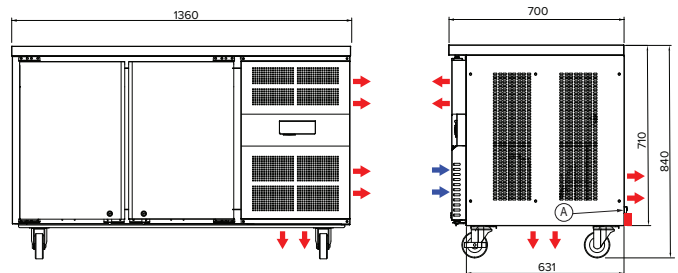

### Legend

**A** Electrical Connection

### Accessories

**Shelf Kit -** AXR.UCGN.SHELFKIT  
 1/1GN shelf with runners