


Full WLL in any direction
with 4:1 design factor

100% electro-magnetic
crack detection tested


Patented markings – easy
determination for
withdraw of service

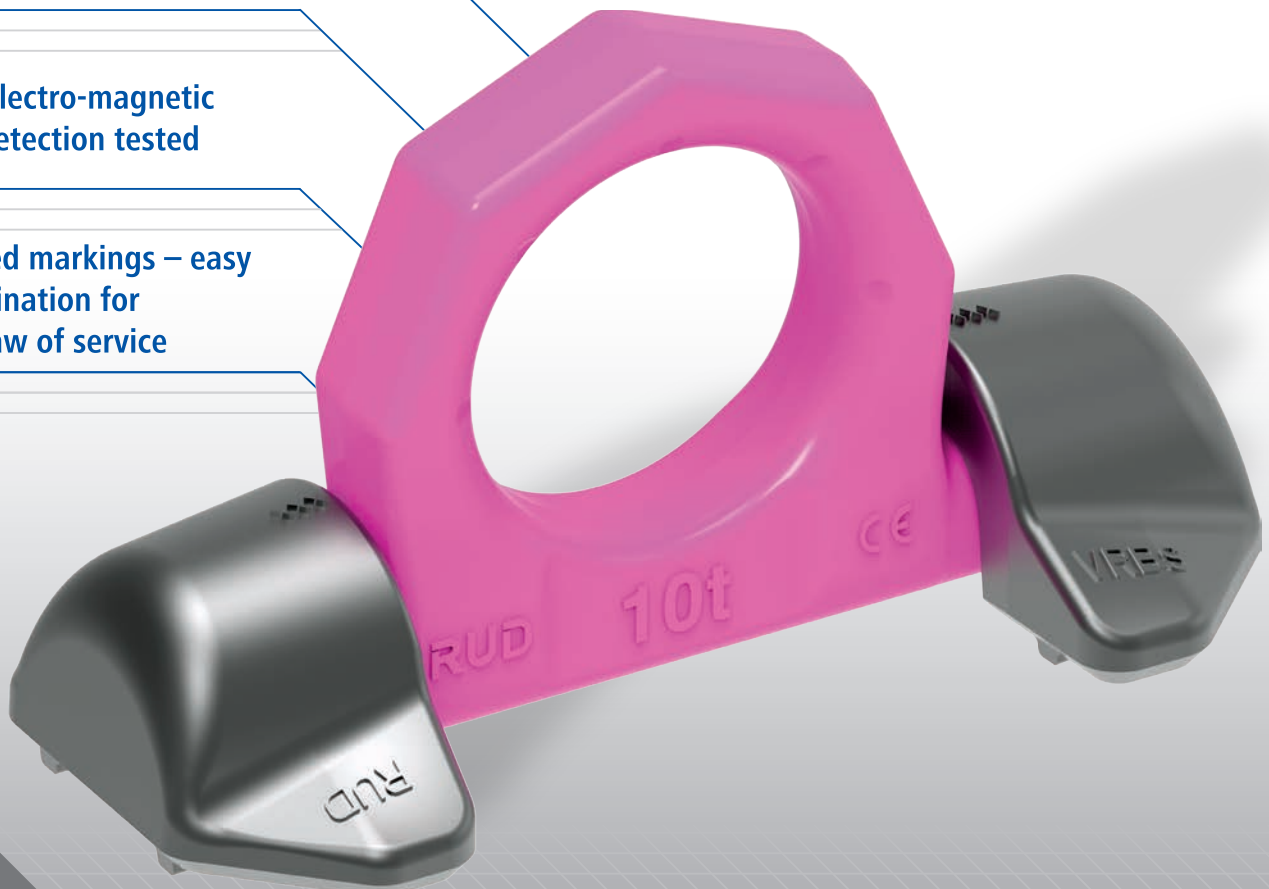

VRBS

Load ring for welding


Product features / VRBS Load ring

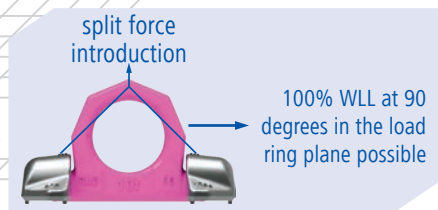

- ✓ Full WLL in any direction with 4:1 design factor
- ✓ 100% electro-magnetic crack detection tested
- ✓ Manufactured using high tensile CrNiMo - steel
- ✓ The VRBS Load Ring offers a functional, compact innovative design
- ✓ Rated capacity can be increased 100% in lashing applications
- ✓ Mounting blocks fully prepared for welding including distance lugs
- ✓ Test certificates available
- ✓ Painted in the unique durable RUD pink powder coat finish

TYPE	WLL [t]	A	B	C	D	E	F	T	Weld HY + Δa	WEIGHT [kg]	Ref. No.
VRBS 4	4.0	62	14	28	48	135	71	65	HY 4 + Δ3	0.8	7992488
VRBS 6.7	6.7	88	20	39	60	170	92	84	HY 5.5 + Δ3	1.6	7992489
VRBS 10	10.0	100	22	46	65	195	100	95	HY 6 + Δ4	3.0	7992490
VRBS 16	16.0	130	30	57	90	263	134	127	HY 8.5 + Δ4	6.6	7992491
VRBS 31.5	31.5	160	42	79	130	375	195	178	HY 18 + Δ4	15.6	60267

Dimensions and specifications subject to change

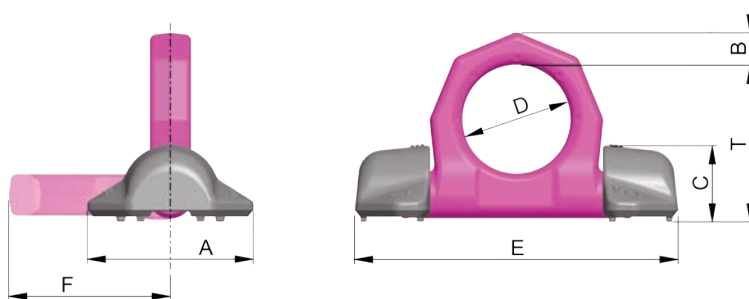

Additional information available from our Lifting and Lashing Catalogue or via our website: www.rud.com.au

Distributed by: