



MXG SK70W

Skid Steer Loader



Air Conditioning
4-in-1 Bucket (with bucket teeth)
Joystick controller
Reverse Camera
ROPS and FOPS

Engine Model: XINCHAI A498BT1-75
Power: 36.7kW/ 2500rpm
Operating Weight: 2,800kg
Bucket Capacity: 0.43m³



Let's make construction easier

SK70W SPECIFICATIONS

| | UNIT | SK70W |
|----------------------------|----------------|--------------------|
| MAIN SPECIFICATION | | |
| Engine Model | | XINCHAI A498BT1-75 |
| Emission Standard | | Nation II |
| Rated Power | kW/rpm | 36.7/2500 |
| Operating Weight | kg | 2800 |
| Rated Payload | kg | 760 |
| Bucket Capacity | m ³ | 0.43 |
| L×W×H | mm | 3320×1530×2000 |
| ENGINE SYSTEM | | |
| Engine Model | | XINCHAI A498BT1-75 |
| Rated Power | kW/hp\rpm | 36.7/50\2500 |
| Displacement | L | 3.168 |
| Stroke | mm | 98 |
| Bore | mm | 105 |
| WEIGHTS | | |
| Operating Weight | kg | 2800 |
| POWER TRAIN | | |
| Travel Speed -F&R(unload) | km/h | 11.5 |
| TIRE | | |
| Tyre | | 10×16.5 |
| HYDRAULIC SYSTEM | | |
| Hydraulic Flow - Standard | L/min/rpm | 74 |
| Loader Hydraulic Pressure | MPa | 21 |
| Hydraulic Flow - High Flow | L/min/rpm | |
| Loader Hydraulic Pressure | MPa | |
| OPERATING SPEC | | |
| Rated Payload | kg | 760 |
| Tipping Load | kg | 1520 |
| Breakout Force | kN | 20.3 |
| Traction Force | kN | 18.1 |

| SERVICE REFILL CAPACITY | | |
|--------------------------------|---|----|
| Chain Box, Each Side | L | 9 |
| Cooling System | L | 12 |
| Engine Crankcase | L | 8 |
| Fuel Tank | L | 83 |
| Hydraulic Tank | L | 65 |

| DIMENSIONS | | | |
|-------------------|---|------|-------|
| | | UNIT | SK70W |
| A | Max.Operation Height | mm | 3850 |
| B | Bucket Pin Height | mm | 2920 |
| C | Cab Roof Height | mm | 2000 |
| D | Max.Height at Bucket Leveled | mm | 2730 |
| E | Length without Attachment | mm | 2420 |
| F | Length with Standard Bucket | mm | 3320 |
| H | Dumping Height | mm | 2180 |
| J | Reach Rollback | mm | 790 |
| M | Wheelbase | mm | 1050 |
| P | Ground Clearance | mm | 210 |
| R | Front Turning Radius without Attachment | mm | 1200 |
| S | Front Turning Radius | mm | 2060 |
| T | Rear Turning Radius | mm | 1520 |
| U | Tail Length | mm | 960 |
| V | Center Distance between Two Wheels | mm | 1240 |
| W | Bucket Width | mm | 1530 |
| G | Dumping Angle at Max.Height | ° | 39 |
| K | Bucket Angle on Ground | ° | 28 |
| L | Bucket Rollback Angle At Max.Height | ° | 94 |
| Q | Start Angle | ° | 27 |

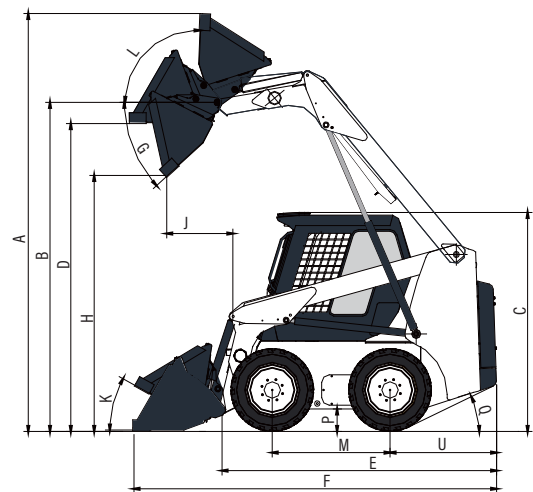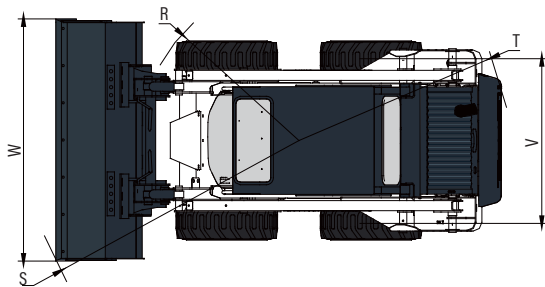

* THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.

Melbourne:
10-14 Citrus St, Braeside VIC 3195
Sydney:
293 Parramatta Rd, Auburn NSW 2144

Website : www.mxg.com.au
Phone : 1800 834 611
Email: Info@mxg.com.au