


#### **FEATURES**

- Single pedal foot operated switches
- Durable and reliable with steel housing for long life
- Latching and nonlatching versions available
- Rated 250Vac/30Vdc at 3A
- Incorporates nonslip base pad and footpad
- Comes with 2m cable

# RS PRO General Purpose Momentary Foot Switch - Mild Steel Case Material, SP-CO, 3 A Contact Current, 250V Contact

RS Stock No.: 316-901

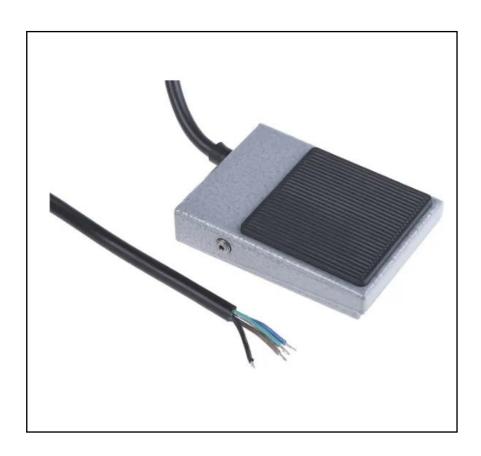

RS Professionally Approved Products bring to you professional quality parts across all product categories. Our product range has been tested by engineers and provides a comparable quality to the leading brands without paying a premium price.



#### **Product Description ATTRIBUTE 1**

RS PRO general purpose light duty foot switch with SPDT (Single Pole Double Throw) Contacts. Foot switches are commonly used on large machinery were hand operated switches are a safety concern. This foot controller pedal is black and grey in colour and ideal for various applications. This range includes:

316-901 - Momentary and non-latching

316-939 - Latching and maintained

#### **General Specifications**

| Contact Configuration | SP-CO   |
|-----------------------|---|
| Switch Operation      | Momentary   |
| Case Material         | Mild Steel  |
| Switch Environment    | General Purpose   |
| Contact Material      | Silver  |
| Colour                | Black, Grey   |
| Applications          | Foot switches are commonly used in applications where hands-free control is more practical or safer. They can be found on: Industrial machinery and smaller power tools, Hospital beds, Dentist Chairs, Lamps |

#### **Electrical Specifications**

| Contact Voltage Rating (AC) | 250V |
|-----------------------------|------|
| Contact Voltage Rating (DC) | 30V  |
| Contact Current Rating      | 3A   |



# **Mechanical Specifications**

| Length     | 90mm               |
|------------|--------------------|
| Height     | 24mm               |
| Dimensions | 90mm x 66mm x 24mm |
| Width      | 66mm               |
| Weight     | 0.1kg              |

# **Operation Environment Specifications**


| Operating Temperature | -5°C to 40°C |
|-----------------------|--------------|

### **Protection Category**

| IP Rating | IPX2 |
|-----------|------|

# **Approvals**

| Standards Met             | 2014/35/EU, EN 60950                                   |
|---------------------------|--|
| Compliance/Certifications | CE, RoHS, EN 61058-2-1; EN 61058; EN 60601-1; EN 60950 |

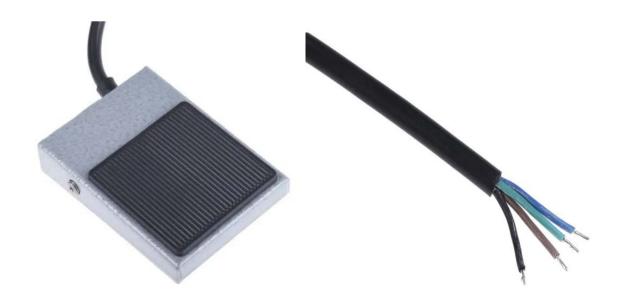





# Outline Dimensions

