



## TECHNICAL SPECIFICATIONS

Racks/hour (theoretical)	60/40/30/20
Cycle time * <sup>1</sup>	60/90/120/180 sec
Power supply	240V
Wash pump	650 W
Booster heater	2.8 kW
Total power	3.02 kW
Total current	15 Amp
Wash tank capacity	29 ltrs
Booster heater capacity	5.7 ltrs
Water consumption (per cycle)	2.3 ltrs
Min/max water pressure * <sup>2</sup>	200/600kPa
Min/max water temp * <sup>3</sup>	50/65°C
Rinsing temp (approx)	85°C
Rack size	500 x 500 mm
Useful height	320 mm
Weight (empty)	56.5 kg
Weight (shipping)	72 kg
Dimension (shipping)	68 x 68 x 102cm
Drain Type	Pumped (min 3ltr / sec)
Water connection	3/4" hose
Required hot water supply	70 ltr/hr
Drain hose diameter	24 mm

\*<sup>1</sup> All Machines fitted with thermostop which may effect cycle time

\*<sup>2</sup> Optional booster pump is available if the water pressure is below 200kPa; reducer required if over 600kPa

\*<sup>3</sup> Minimum incoming water temperature without loss of performance; units can operate with cold water at reduced performance.

Machine must be connected according to local regulations.



## STANDARD FEATURES

- Double skin door
- Door safety switch
- Thermostop
- Built-in rinse aid injector
- Soft touch panel with temp & alarms
- 4 wash cycles plus self cleaning cycle
- Fully automatic washing process
- Drain pump
- Low water consumption
- Backflow prevention valve
- Easy to remove nozzles
- One piece double filter & overflow




The GS-50T is a dual cycle feature packed budget priced solution. It is powerful, compact and takes the standard 500 x 500mm rack.

The GS-50T has a drain pump - this means that the machine can be installed in places where the actual waste connection is above the machine outlet point. (Maximum height of 40cm).

This versatile machine is perfect for small to medium sized restaurants on a budget.

## TECHNICAL DRAWING

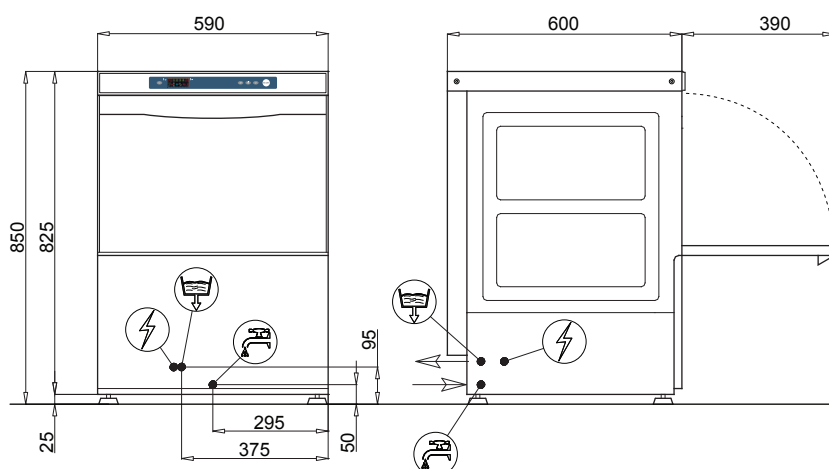

All details subject to change without notice

Call Rhima Australia  
today on **1300 347 944**

