

Tenso® TS-702

Automatic Strapping
Machine 12mm

#60329



Simple
Operation

Easy
Maintenance

Auto Strap
Ejector

LCD
Display

The TS-702 12mm is a state-of-the-art, high-speed automatic strapping machine. This innovative device can handle different PP strapping, boasting a robust and compact mechanical strapping head. With a capacity of 60 straps per minute, the TS-702 12mm merges industry-standard features with user-friendly designs, ensuring optimal performance, easy maintenance, and cost-effectiveness in its class.

Features




- High Value-added machine
- For 12mm PP strapping
- Robust and compact mechanical strapping head
- Turntable control panel with LCD
- Free access to strap guides
- Waist-high auto-strap feeding
- Waist-high quick coil change
- Auto strap ejector
- Capacity up to 60 cycles per minute

Highlights

- **Sensor Heater** – Fast, consistent sealing with sensor control.
- **Low Voltage** – Enhanced safety with 24V power.
- **Strap End Ejector** – Easily clean and prepare for next coil.
- **Front Foot Switch** – Easy operation with ergonomic design.
- **Dispenser Release Switch** – Simple strap retrieval for auto feeding.
- **Adjustable Table Height** – Customize height from 820-920 mm.
- **Turntable Control Panel** – LCD display for accessible operation.
- **Auto Strap Ejector** – Clears unwanted strap automatically.

Options

- Photo-eye switch
- Rear foot bar switch
- Foot pedal switch
- Lower adjustable table height (770 mm - 820 mm)
- Selected parts in Stainless Steel

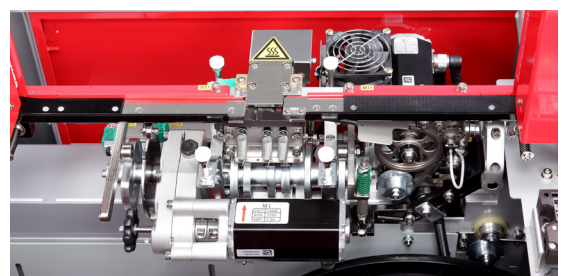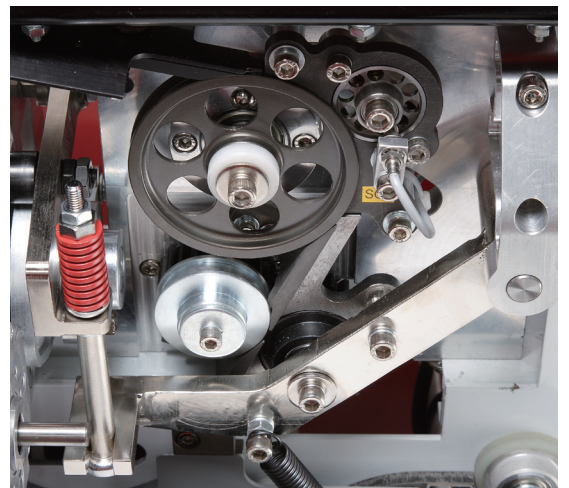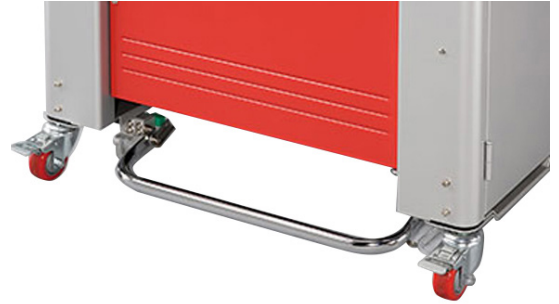

Specifications

Electrical Requirements	110V/220V/230V/240V 50/60Hz 1PH
Strapping Capacity	60 straps/minute
Standard Arch Size	550 mm(W) x 400 mm(H)
Strap Width	12mm
Strap Thickness	0.35 mm~0.65mm
Tension Range	1 to 32 kg
Dimensions (W) x (D) x (H)	840 x 652 x 1325~1425 mm
Table Height	820 ~ 920 mm
Machine Net Weight	158 kg
Maximum Package Weight	70 kg
Maximum Package Size	(Arch width - 50)W x (Arch height - 50)H mm
Minimum package Size	70W x 20H mm
Strap Core Inner Diameter	Standard: 200mm (Option: 150mm)
Power Consumption	500W
Temperature of working environment	0 ~ 40° (non-condensing)



See me in action!

Tenso® TS-702-12mm

