







King 6G Traditional Stone Deck Oven

GAM International



SPECIFICATIONS

Voltage	400 Volt AC 3/N/PE (Supplied) 230 Volt AC 1/N/PE (Optional)
Power	8000 Watts
Weight	192 kg
Plug Supplied	No, lead only
Warranty	4 Year Parts & 2 Years Labour <small>(Asset must be registered to activate full warranty)</small>
Thermostat	60 - 450 °C
Capacity	6 x 34 cm    ∅ pizzas   

DIMENSIONS

External Width	1530
External Height	380 (400 w/ feet)
External Depth	1145
Internal Width	1050
Internal Height	155
Internal Depth	700

AVAILABLE ACCESSORIES

- Stand with undershelf
- Extractor Hood
- Levelling cell

Main Features

- Fits up to 6 x 34cm pizzas
- Reaches working temperature of 300°C in less than 30 minutes and 420°C in less than 45 minutes
- Double glazed glass door along with sealing fibre chamber gaskets and Glass Fibre insulation prevents burn, reduces any heat loss and allows the user to bake with the door open
- Economy mode forces the ceiling and floor resistors to switch on, limiting the required power by 50%
- Well lit interior chamber light
- No Gap Refractory Stone ensures no difficult to clean spots where flour and cheese can get stuck, burn and ruin the taste of the pizza
- Modular so can be stacked up to 3 units high
- Fully constructed in high grade (AISI) 304 stainless steel
- Revolutionary I.W.O.S™ (Italian Wood Oven Substitute) baking system
- Advanced visual control panel
- Auto-pilot start up mode
- Exhaust discharge adjustments
- 9 Baking programs
- Top and bottom heating control

IWOS™ Italian Wood SYSTEM Oven Substitute


KING is the only oven in the world with the innovative IWOS™ System, which mechanically reproduces the air circulation inside a wood-burning pizza oven.




THE GOOD LADY

Phone: 1800 183 818 | Email: support@thegoodlady.com.au
Website: www.thegoodlady.com.au


SIDE

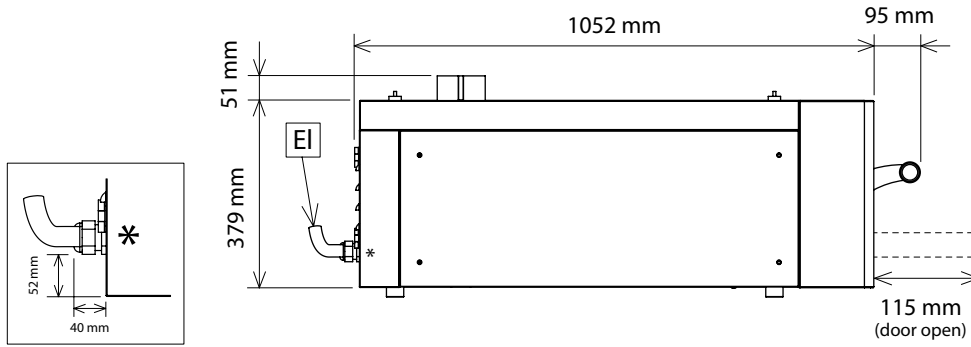

FRONT

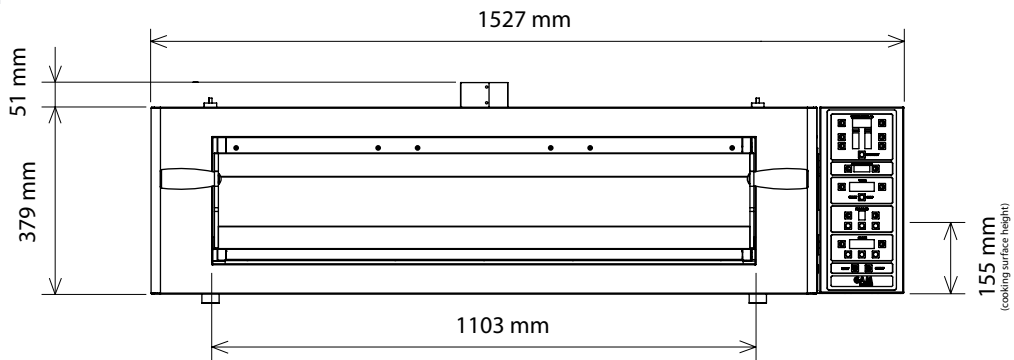

TOP

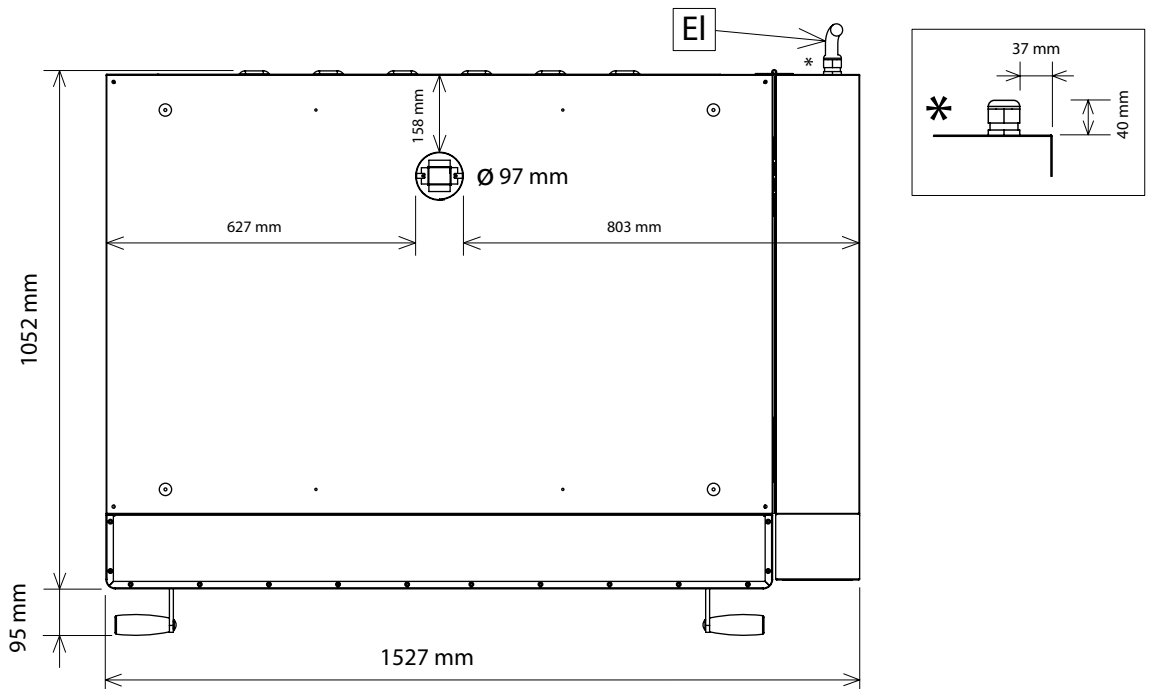

EI = Electrical connection

We reserve the right to alter specifications without notice.

20 mm feet supplied as standard