

## Eco-V Eco Series Handheld Thermal Camera



The handheld thermal camera is based on the thermal technology, specially designed for the needs of temperature measuring applications. People can quickly troubleshoot faults on-site.

- Thermal resolution: 96 x 96 (9,216 pixels)
- 112:1 Distance to spot ratio (D:S)
- SuperIR: 240 x 240 (57,600 pixels)
- NETD : < 50mK (@ 25 °C,F#=1.0)
- Measurement presets: center spot, hot spot, cold spot, off
- 25 Hz image frequency
- Laser pointer
- Built-in 4 GB flash memory: 30,000 pictures
- Up to 8 hours continuous running
- Thermal/Visual/Fusion

## ▪ Specification

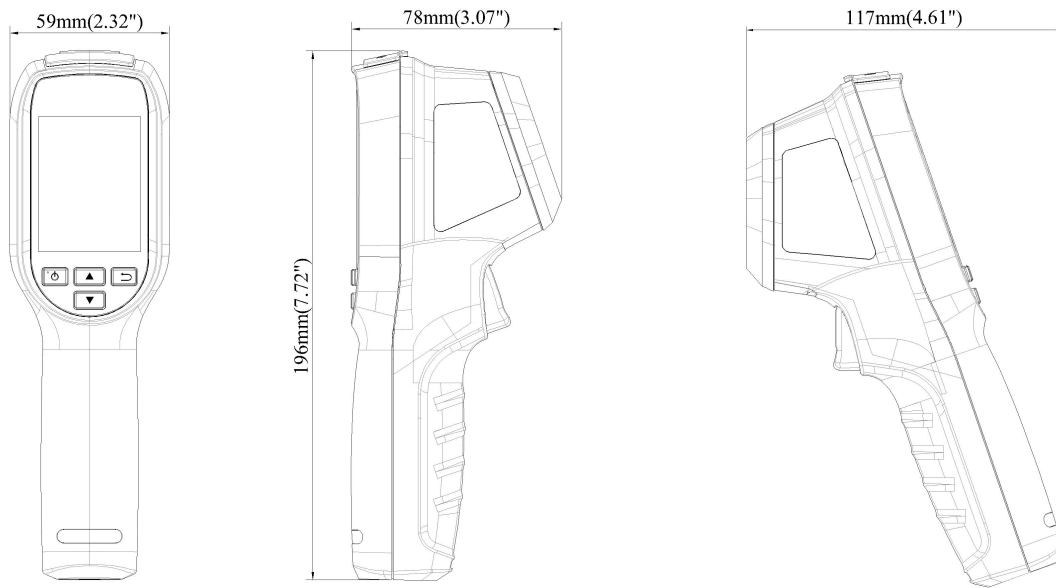

Infrared Image	
IR Resolution	96 × 96 (9,216 pixels)
SuperIR	240 × 240 (57,600 pixels)
Distance to Spot Ratio (D:S)	112:1
NETD	< 50 mK (@ 25 °C, F#=1.0)
Image Frequency	25 Hz
Detector Pitch	12 μm
Spectral Range	7.5 to 14 μm
Focal Length	1.35 mm
Field of View (FOV)	50° × 50°
F-number	F1.0
Spatial Resolution (IFOV)	8.89 mrad
Focus Mode	Focus Free
Min. Focus Distance	0.1m (0.33 ft)
Image Display	
Display	240 × 320 Resolution, 2.4" LCD Screen
Image Modes	Thermal/Visual/Fusion
Color Palettes	White Hot, Black Hot, Rainbow, Ironbow, Red Hot
Color Alarm	Above alarm
Visual Camera	640 × 480
Measurement and Analysis	
Object Temperature Range	-20°C to 550°C (-4 °F to 1022 °F)
Accuracy	Max (±2°C/3.6°F, ±2%) at ambient temperature 25°C (77°F) and object temperature above 0°C (32°F)
Measurement Tools	Center Spot, Hot Spot, Cold Spot
Level and Span Mode	Auto
Data Storage and Communication	
Storage Media	Built-in 4 GB flash memory
Image Storage Capacity	Approx. 30,000 Images
General	
USB Interface	USB Type-C
Laser	Yes, Class II
Battery Type	Rechargeable Li-ion battery
Battery Charging Time	Approx. 3 hours fully charged(Adapter Output: 5 V 2 A )
Battery Operating Time	Approx. 8 hours
Protection Level	IP54
Drop Test Height	2 m (6.56 ft)
Working Temperature Range	-10 °C to 50 °C (14 °F to 122 °F)
Storage Temperature Range	-40 °C to 70 °C (-40 °F to 158 °F)
Relative Humidity	< 95% non-condensing
Weight	Approx. 290 g (0.64 lb)
Dimension	196 × 117 × 59 mm (7.7 × 4.6 × 2.3 in)

Tripod Mounting

UNC ¼"-20

**▪ Available Model**

HM-TP30-1AQF-Eco-V

**▪ Dimension****Dimensions****Camera (× 1)****QSG (× 1)****USB 2.0 A to USB Type-C Cable (× 1)****Wrist Strap (× 1)****Calibration Certificate (× 1)**

- **Accessory**
- **Optional**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

