





Signature Undercounter Dishwasher – 365mm rack / 450mm rack **W 535mm x D 595mm x H 845mm**

Washtech's XV is a compact, highly efficient, simple-to-use and easy-to-maintain undercounter dishwasher. With one of the industry's lowest water consumption rates along with leading rinse heating, the XV provides excellent wash results in less time, while being light on operating costs and the environment.

The XV features Washtech Hybrid Controls which combine IP67 stainless switches, tried-and-tested switchgear, with a customisable electronic timer.

Since 1981 Washtech dishwashers have been constructed from heavy-duty stainless steel, and are engineered specifically for Australian conditions and regulations. Backed by the most extensive service network and spare parts inventory in the region, your Washtech dishwasher will not let you down.

Standard Features

- QuikStart 1 and 2 minute wash cycles
- Washes up to 840 plates per hour/960 glasses per hour
- Low hot water consumption of 2.2 litres per cycle
- Washtech Hybrid Controls
- QuikConnect (Plug & Play) Easy Installation supplied complete with:
 - Water supply hose
 - Detergent and rinse aid pumps with injector lines
 - Drain pump with outlet hose
 - 15 amp plugset
 - No commissioning required
- Heavy-duty stainless steel construction
- Upper and lower wash/rinse arms with precision moulded jets
- Easy-clean composite wash filter
- Compatible with 365mm to 450mm glass and dish racks
- Watermark approved backflow prevention
- Comprehensive 5-2-1 warranty

Includes:

- 1 x 450mm dish rack (600 70081)
- 1x 450mm cup rack (600 70080)
- 1x cutlery container (C660503)
- 1 x rack adapter (216 10031)



























Signature Undercounter Dishwasher - 365mm rack / 450mm rack W 535mm x D 595mm x H 845mm

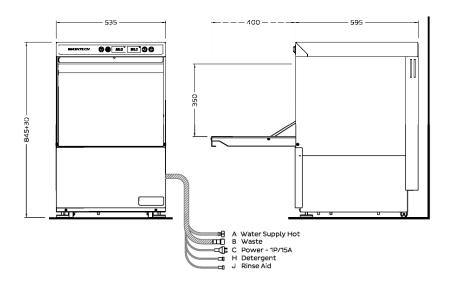





А	not water			Diffiensions	Machine	Packeu	
	Temperature	65°C		Width	535	645	
	Connection	3/4" male; hose su	pplied	Depth	595	610	
	Pressure	200-350kPa		Height	845	970	
	Flow	20 litres per min		Weight	57	74	
	Quality	Potable - refer table		Cubicmetres		0.38	
	Backflow Prevention	Atmospheric Vacu	um Breaker				
	Consumption	2.2 litres per cycle*		Water Quality	Min	Max	
				pН	7	8	
В	Waste			Hardness ppm	20	100	
	Connection	Hose supplied for 38mm open standpipe 750mm high or connection to sink trap		Cl-		100	
				SO ₄		400	
				Fe		0.1	
				Mn		0.5	
С	Electrical	V Hz A/phase	max kW	Cu		0.05	
	Single Phase	240 50 15	3.37	Cl ₂		0.1	

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine.

*Consumption may vary with site conditions.



moffat.com.au

Australia Moffat Pty Limited

Victoria/Tasmania

740 Springvale Road Mulgrave, Victoria 3170 Telephone 03-9518 3888 Facsimile 03-9158 3833 vsales@moffat.com.au

New South Wales

Telephone 02-8833 4111 nswsales@moffat.com.au

South Australia

Telephone 03-9518 3888 vsales@moffat.com.au

Queensland

Telephone 07-3630 8600 qldsales@moffat.com.au

Western Australia

Telephone 08-9202 6820 wasales@moffat.com.au



All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design. manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd Version: 1903

an Ali Group Company

