

Electric Towing Tug – 3.5 Tonne Capacity with Tow Bar & Hitch – Low Profile

The KMT-T35FLP Low Profile Electric Towing Tug is a compact, high-performance towing solution designed to safely and efficiently move loads up to 3500kg. Its **low-profile design provides improved stability, traction and manoeuvrability**, making it ideal for towing trailers, bins, trolleys, boats, light aircraft, vehicles, caravans, cable reels, roll cages and industrial carts.

Commonly used in airports, warehouses, factories, hospitals and logistics facilities, this electric tug provides **reliable performance in tight or confined spaces** where controlled movement is required.

The upgraded low-profile design features **side weights for improved stability and traction on inclines or uneven surfaces**. Constructed from durable steel with solid rubber wheels and a powder-coated finish, it provides long-term reliability in demanding industrial environments.

The ergonomic handle with centralised controls allows safe and efficient operation, while the **AC drive motor provides smooth, consistent power delivery**.

An additional **front control panel with forward, reverse, power and speed adjustment functions** allows operators to control the tug while positioning the hitch. This improves coupling accuracy, reduces unnecessary movement around the unit and increases workflow efficiency.

Includes **batteries, external charger and battery level gauge** for immediate use.

Features

- 3500kg towing capacity.
- Low-profile design for improved stability and manoeuvrability.
- Side weights provide additional traction on slopes and uneven surfaces.
- Durable steel construction for industrial use.
- Solid rubber wheels for smooth operation.
- AC drive motor provides reliable and consistent power delivery.
- Powder-coated finish for improved durability.
- Adjustable tow bar and front towing hitch connection.
- Front and rear operating controls.
- Ergonomic handle with easy-to-use controls.
- Includes batteries, external charger and battery level gauge.




Visit www.mitaco.com.au for more photos and details

Specifications

Model		KMT-T35FLP
Rated Capacity	(kg)	3500
Rated Traction Load	(kg)	3500
Drive Motor	(V/W)	AC 24/1500
Drive Axle Model	(mm)	Total axle length: 680mm; Mounting distance: 480mm
Drive Axle Gear	(Ratio)	57:1
Handle Assembly		CH-1

Battery	(V/Ah)	2×12/120
Charger Specification	(V/A)	24/15
Traction Speed	(km/h)	2-3
Turning Radius	(mm)	1500
Front Wheel	(mm)	Ø375 × 115
Rear Wheel	(mm)	Ø300 × 100
Overall Dimensions	(mm)	1775×805×1110
Net Weight	(kg)	417

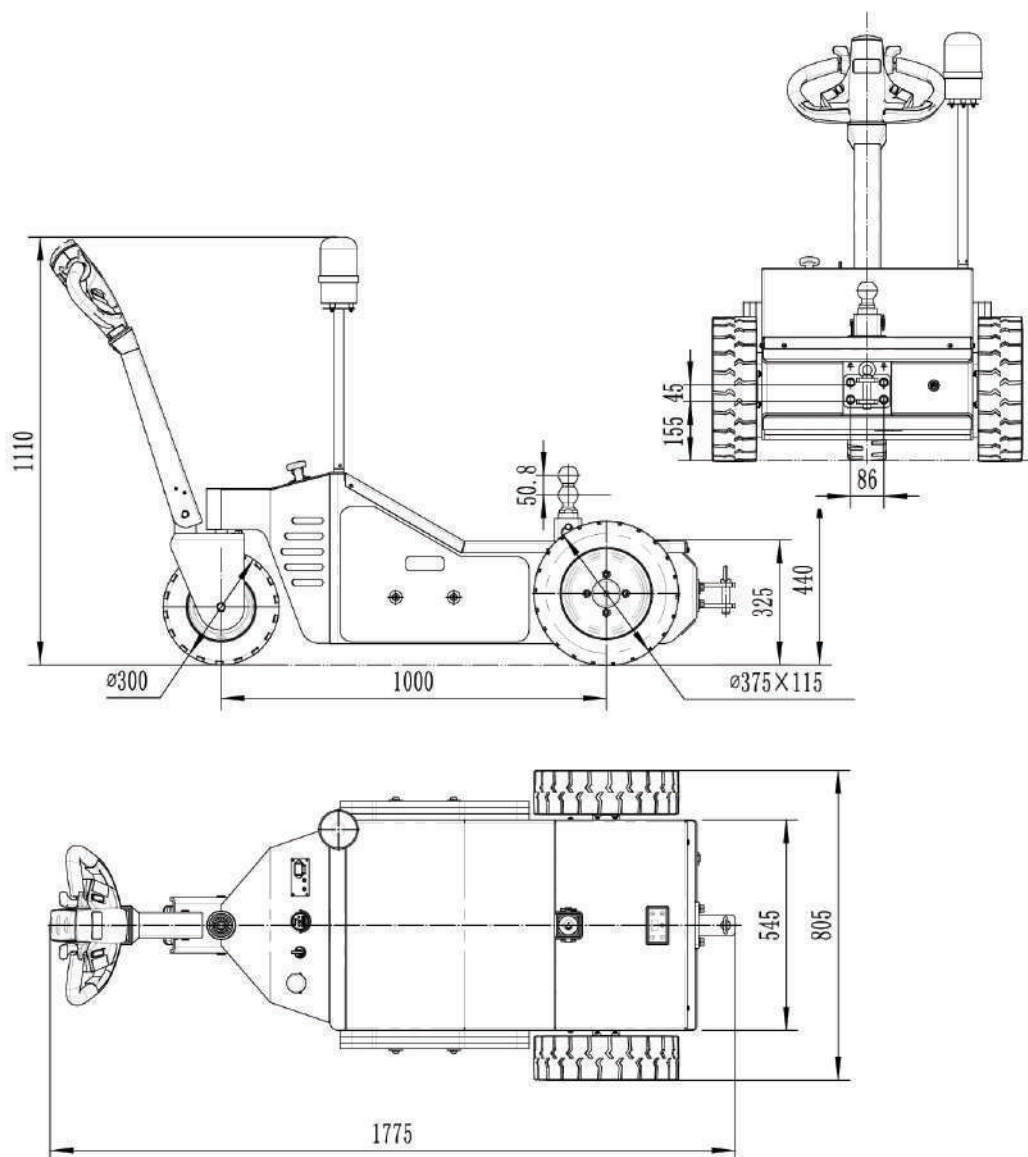

Mitaco has national sales and distribution capabilities, our sales office and warehouse is located in Brisbane. Large inventory holdings enable fast-track dispatch of stock orders. This combined with an easy to use online ordering system makes the delivery of stocked products simple, fast and reliable.