

21 Industrial & Floodlights>The LED Park Light Die cast

70104/G/C



LED outdoor light for poles 3m and higher. Ideal for parks, parkings, playgrounds.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	21 Industrial & Floodlights
Family	The LED Park Light Die cast
Order Code	70104/G/C
Colour	Grey
Material	Die Cast
Shape	Circular
Height	605mm
Diameter	450mm
Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	No

Gear

Built In

Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

30W

IP Rating

IP65

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

950mA

Voltage

30V

Power(Watts)

28,5W

IP Rating

IP65

Light Source

LED built in

LED Type

COB

LED Brand

Bridgelux

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)


25,6-34W

Power Factor

0,9

Constant Current	Yes
950mA	27-36V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Meanwell


Illumination Data

Colour Temperature	4000K
Lumen Output	2700lm
Light Efficiency	90lm/W
CRI	70
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight	12,5Kg
Pcs/Carton	1
Barcode	5291889035572
HS Code	9405409900

Energy Label

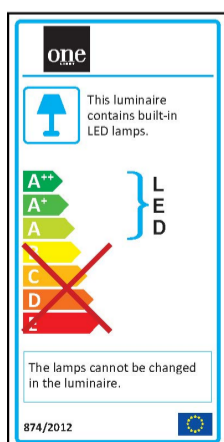

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

