


Orford EB Rear Loading Range

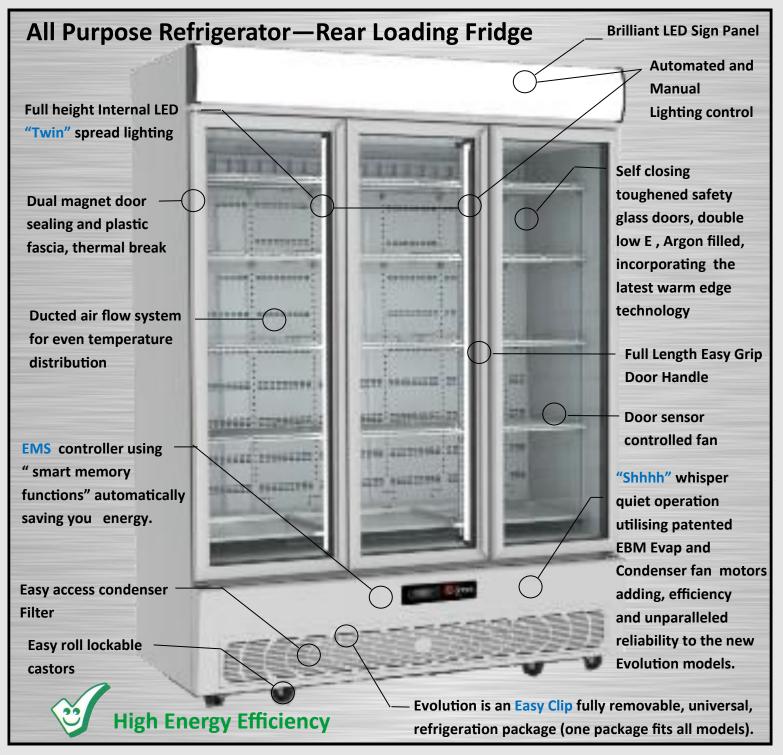

Proudly Australian Designed

by The Orford Group

IP protected by AUS DSN no 345317



With Evolution comes much responsibility. The Orford Group continues to develop World Class Energy reduction systems to improve the lives of our customers and future generations.

1300 ORFORD (1300 673 673) +617 4641 7372 sales@orford.com.au





Queensland 4350 Australia



Orford EB Rear Loading Range

Features



- > Design
- > Energy Efficiency
- Performance
- > Quality
- Reliability

Universal Refrigeration Package

- ➤ One package fits the entire FB Range
- > Cassette Style: Removable without tools
- Minimal training required for non-qualified personal to replace the package



- > Automatically learns you trading times
- > Automates your energy savings
 - > Perishable and non-perishable mode

E Lighting Control

> Automated or manual control, you choose

1640

> Independent switching of interior and sign lighting



Your choice of reversing or non-reversing function






High Energy Efficiency

EB45R-Sn-PT Specifications	Rear Loading Display Refrigerator with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Interior / Exterior White
Capacity	1384 Litres (Gross)
Dimensions	1640W x 762D x 2220H
Weight	265 Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	3.2 Amps
Thermometer	Digital
Shelves	12 Height Adjustable Heavy Duty PVC Coated
Shelves	3 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	3.38 m²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	3 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge 3 x Self closing powder coated rear doors
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R134a
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	6.03 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertising Sign	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control







* Energy Consumption measured at 25°C. Cabinet Class 3M1 as per Australian Standard AS1731



