

PASTICCERIA - GELATERIA

MARILYN



ItalianGelato
Concepts

dessert projects & equipment supply

patisserie

cake
cream

chocolate

vanilla



MARILYN



MARILYN 650 GBT



LED COLOUR TEMPERATURE
3000-6500K

R290
eco friendly

**BUILT-IN &
FREE STANDING**



OPTIONAL
*Adjustable LED color temperature
between 3.000 K and 6.500 K*

STANDARD:
Adjustable feet

Standard color










































COD. 13

MARILYN 275 QB



MARILYN 450 BTQ



	 °C	 Lt.	 LxPxH mm	 N° - mm. DI SERIE	 Watt	 % U.R.	 DEFROST	 H ₂ O			 Kg.		
Marilyn 275 QB	+4/+10	275	700x710x1510	3 - 545x425	400	75		AUT		R290	162	Standard	LED Standard
Marilyn 275 BTQ	-15/-21	275	700x710x1510	3 - 545x425	400	40		AUT		R290	174	Standard	LED Standard
Marilyn 275 BTQ BIS	+5/-20	275	700x710x1510	3 - 545x425	400	40		AUT		R290	174	Standard	LED Standard
Marilyn 450 Q	+4/+10	450	700x710x1910	5 - 545x425	400	75		AUT		R290	196	Standard	LED Standard
Marilyn 450 Q Ciocco	+14/+16	450	700x710x1910	5 - 545x425	900	40/44		AUT		R290	196	Standard	LED Standard
Marilyn 450 BTQ	-15/-21	450	700x710x1910	5 - 545x425	400	40		AUT		R290	207	Standard	LED Standard
Marilyn 450 BTQ BIS	+5/-20	450	700x710x1910	5 - 545x425	400	40		AUT		R290	207	Standard	LED Standard
Marilyn 450 GBT	-10/-19	450	700x710x1910	5 - 545x425 1 - 545x425	420	40		AUT		R290	204	Standard	LED Standard
Marilyn 650 Q	+4/+10	650	900x710x1910	5 - 745x425	400	75		AUT		R290	228	Standard	LED Standard
Marilyn 650 Q Ciocco	+14/+16	650	900x710x1910	5 - 745x425	900	40/44		AUT		R290	228	Standard	LED Standard
Marilyn 650 BTQ	-15/-21	650	900x710x1910	5 - 745x425	400	40		AUT		R290	236	Standard	LED Standard
Marilyn 650 BTQ BIS	+5/-20	650	900x710x1910	5 - 745x425	400	40		AUT		R290	236	Standard	LED Standard
Marilyn 650 GBT	-10/-19	650	900x710x1910	5 - 745x425 1 - 745x425	420	40		AUT		R290	230	Standard	LED Standard

Climatic class: MAX = (30°C - % U.R. 55)

MARILYN

- High efficiency R290 thermodynamics
- Frame in black anodized aluminum
- Door with low emissivity structural glass, with tempered and silk-screened outside windows
- Standard color: black
- Interior made entirely of AISI 304 stainless steel, corrosion free, laser cut and mirror polished finish.
- Touch screen controller with high contrast backlight, features to adjust the thermometer, lighting control and integrated ECO mode
- Wide "hidden" handle, integrated on the full height of the door.
- Chrome stainless steel swivel wheels with and without brake
- Standard adjustable feet
- Lock as standard

OPTIONAL POTENTIOMETER:

- Adjustable LED colour temperature between 3.000 K and 6.500 K



WINE




Structure for wine bottles version

OPTIONAL: DRINK



*Only for MARILYN 450-650 Q:
Support for water version*

ON DEMAND



*Available without panels
SP built-in version*



OPTIONAL POTENTIOMETER:
*Adjustable LED colour
temperature
between 3.000 K and 6.500 K*

Standard



All Grey *



All White *



Two-color Fashion Style *



* Special versions (with surcharge)

MARILYN BTQ-INVERTER



Reduced energy consumption, reduced up to -45%
 High efficiency R290 thermodynamics
 Using INVERTER technology to improve showcase performance
 USB port
 2.41" Color TFT LCD Display Screen
 Low coefficient of emissivity insulating glazing, with exterior tempered and silkscreen glasses
 Interior made entirely of AISI 304 stainless steel, corrosion free, laser cut and mirror polished finish
 Wide "hidden" handle, integrated on the full height of the door

OPTIONAL:


Electric-strike lock with password

CONNECTION OPTIONAL:

Wi-Fi connection
 CLOUD control and connection from PC / Tablet / Smartphone: Events notification by mail
 Real-time info about storage temperature
 Set point modification
 Historical and real-time charts
 Events list consultation
 Access to user manuals
 mail with weekly chart report in PDF format

OPTIONAL POTENTIOMETER:

Adjustable LED color temperature between 3.000 K and 6.500 K




Available without panels, SP built-in version

	°C	Lt.	LxPxH mm	N° - mm. DI SERIE	Watt	% U.R.	DEFROST	H ₂ O			Kg.		
Marilyn 450 BTQ-Inverter	-15/-21	450	710x700x1910	5 - 545x425	950	40		AUT		R290	220	Electronic lock	LED Standard
Marilyn 650 BTQ-Inverter	-15/-21	650	910x700x1910	5 - 745x425	950	40		AUT		R290	255	Electronic lock	LED Standard

Climatic class: MAX = (30°C - % U.R. 55)

Pastry and Ice-Cream


MARILYN 275





QB




**BTQ
BTQ-BIS**




MARILYN 275 SP




QB **BTQ** **BTQ-BIS**




MARILYN 450




**Q
Q Ciocco**





**BTQ
BTQ-BIS
BTQ Inverter**




GBT




MARILYN 450 SP




Q **Q Ciocco** **BTQ** **BTQ-BIS** **GBT**




MARILYN 650





**Q
Q Ciocco**





**BTQ
BTQ-BIS
BTQ Inverter**




GBT



MARILYN 650 SP







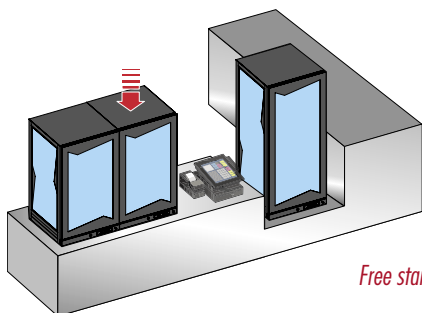


Q **Q Ciocco** **BTQ** **BTQ-BIS** **GBT**



Free standing or Built-in installation

Pastry and Ice-Cream

Options		MOD.
	Glass with anti-fog film vidrios	Door MARILYN 275 BTQ MARILYN 275 BTQ BIS MARILYN 450 BTQ MARILYN 450 BTQ BIS MARILYN 450 GBT MARILYN 450 BTQ-INVERTER
		All sides MARILYN 650 BTQ MARILYN 650 BTQ BIS MARILYN 650 GBT MARILYN 650 BTQ-INVERTER
	Potentiometer for light	MARILYN
	Temperature for whipped cream, for positive compartment	MARILYN 275 QB MARILYN 450 Q MARILYN 650 Q
	Glasses suitable for altitude	MARILYN 275 QB MARILYN 275 BTQ MARILYN 275 BTQ BIS MARILYN 450 Q MARILYN 450 Q CIOCCO MARILYN 450 BTQ MARILYN 450 BTQ BIS MARILYN 450 GBT MARILYN 650 Q MARILYN 650 Q CIOCCO MARILYN 650 BTQ MARILYN 650 BTQ BIS MARILYN 650 GBT MARILYN 450 BTQ-INVERTER MARILYN 650 BTQ-INVERTER
	Back mirror glasses	MARILYN 275 QB MARILYN 275 BTQ MARILYN 275 BTQ BIS MARILYN 450 Q MARILYN 450 Q CIOCCO MARILYN 450 BTQ MARILYN 450 BTQ BIS MARILYN 450 GBT MARILYN 650 Q MARILYN 650 Q CIOCCO MARILYN 650 BTQ MARILYN 650 BTQ BIS MARILYN 650 GBT MARILYN 450 BTQ-INVERTER MARILYN 650 BTQ-INVERTER
	Side mirror glass	MARILYN 275 QB MARILYN 275 BTQ MARILYN 275 BTQ BIS MARILYN 450 Q MARILYN 450 Q CIOCCO MARILYN 450 BTQ MARILYN 450 BTQ BIS MARILYN 450 GBT MARILYN 650 Q MARILYN 650 Q CIOCCO MARILYN 650 BTQ MARILYN 650 BTQ BIS MARILYN 650 GBT MARILYN 450 BTQ-INVERTER MARILYN 650 BTQ-INVERTER

Abbreviations Legend



COLD
ENGINEERING
TECFRIGO




Italian Gelato Concepts Pty Limited Unit 1,
37 Mortimer Road
Acacia Ridge Qld 4110

Bris Office: +61 [0] 7 3162 7724
Syd Office +61 [0] 2 8311 9701
Email: info@italiangelato.com.au

www.italiangelato.com.au

Num. P	Number of doors for each counter table (Ex. 3P - Table with 3 doors)
Num. TV	Number of temperatures for each wine cabinet (Ex. 2TV - Wine cabinet performing 2 temperatures)
Num. V	Number of doors for each counter table (Ex. 3V - Table with 3 doors)
BIS	Display cabinet performing positive or negative temperature
BM	Basins heated by bain-maire system
BTFC	Static with fan assistance, low temperature cabinet with blind door
BTQ	Ventilated display freezer with crystal shelves
BTV	Ventilated display freezer with wiring shelves
DA	"Dry Aged", specific display cabinet for dr-aged meat
FG	"Full Glass", structural glass door
G	Ventilated display chiller with wiring shelves
GBT	Static display freezer with fixed evaporating shelves
GN	Equipment arranged to host gn basins
GS	Static display chiller with wiring shelves
GV	Ventilated display chiller with wiring shelves
I	Built-in equipment
M	Buffet/drop-in with motorized hood
P	Equipment to be positioned at the wall
PS	Equipment with sliding doors
Q	Ventilated display chiller with crystal shelves
QB	Ventilated low display chiller with crystal shelves
R	Ventilated display chiller with rotating glass shelves
RBT	Ventilated display freezer with rotating glass shelves
RG	Ventilated display chiller with rotating glass shelves and wiring shelves
RI	Ice-cream showcase with reserve room
SG	Equipment without compressor, already arranged for remote system
SP	Display cabinet without panels
SS	Self-service equipment
VC	Showcase with curved glass
VD	Showcase with flat glass
VDB	Showcase with low flat glass
VFS	Buffet with sliding glass doors on operator side and fixed glass on client side
VT	Ventilated tank
VU	Display cabinet with just one compartment
V	Vertical
O	Horizontal



C O L D
E N G I N E E R I N G

TECFRIGO



Italian Gelato Concepts Pty Limited Unit 1,
37 Mortimer Road
Acacia Ridge Qld 4110

Bris Office: +61 [0] 7 3162 7724

Syd Office +61 [0] 2 8311 9701

Email: info@italiangelato.com.au

www.italiangelato.com.au