

## SPECIFICATIONS


| Size                                | Metric      | British           |
|-------------------------------------|-------------|-------------------|
| Max. Working Height <b>A</b>        | 32m         | 105ft             |
| Max. Platform Height <b>B</b>       | 30m         | 98ft 5in          |
| Overall Length <b>C</b>             | 6.73m       | 22ft 1in          |
| Overall Width <b>D</b>              | 2.55m       | 8ft 4in           |
| Overall Height(Rails Up) <b>E</b>   | 4.13m       | 13ft 7in          |
| Overall Height(Rails Down) <b>F</b> | 3.19m       | 10ft 6in          |
| Platform Size(Length×Width)         | 6.20m×2.45m | 20ft 4.1in×8ft    |
| Platform Extension Size <b>G</b>    | 2.1m        | 6ft 11in          |
| Ground Clearance(Stowed/Raised)     | 0.2m        | 8in               |
| Wheelbase <b>H</b>                  | 4.86m       | 15ft 11in         |
| Turning Radius(Inside/Outside)      | 3.8m/6.3m   | 12ft 6in/20ft 8in |
| Tyres                               | 15-625      | 15-625            |

| Performance          |            |            |
|----------------------|------------|------------|
| S.W.L                | 1000kg     | 2204lb     |
| S.W.L On Extension   | 1000kg     | 2204lb     |
| Max. Occupants       | 4          | 4          |
| Gradeability         | 40%        | 40%        |
| Travel Speed(Stowed) | 4.0km/h    | 4.0km/h    |
| Travel Speed(Raised) | 0.3km/h    | 0.3km/h    |
| Max. Working Slope   | 2°/3°      | 2°/3°      |
| Up/Down Speed        | 150/120sec | 150/120sec |

| Weight         |         |         |
|----------------|---------|---------|
| Overall Weight | 23400kg | 51588lb |

| Power          |              |              |
|----------------|--------------|--------------|
| Diesel Engine  | 55kW/2600rpm | 55kW/2600rpm |
| Diesel Tank    | 130L         | 130L         |
| Hydraulic Tank | 260L         | 260L         |

\* The platform height plus 2m (7ft in British standard) is the working height.  
Standards Compliance

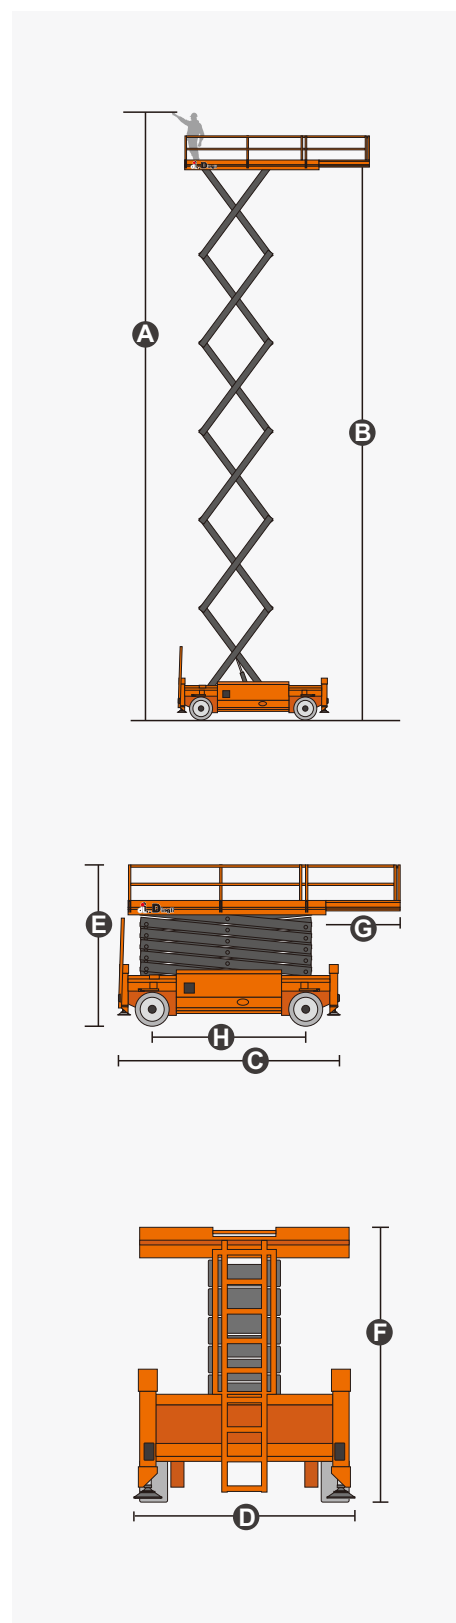

## FEATURES

### Standard Items

- Proportional Joystick Controls
- Self-Locking Gates
- Charging Indicator
- Drivable At Full Height
- 4×4 Drive
- 4×4 Steer
- Four-Wheel Braking
- Self-Weight Lowering System
- Tubing Explosion-Proof System
- Onboard Fault Diagnostic System
- Tilt Alarm
- Motion Alarm
- Horn
- Hour Meter
- Hydraulic Oil Cooling System
- Charging Protection System
- Flashing LED Beacon
- Foldable Guard Rails
- Drive Enable
- Automatic One-Way Platform Extension Deck
- Manual Brake Release
- Lanyard Attachment Point
- Tie-Down And Lifting Points
- Automatic Leveling Hydraulic Outriggers
- Anti-Restart Engine Protection
- Emergency Pump
- Emergency Stop Button
- Platform Load Sense System

### Optional Items

#### Factory Tyres

- Foam-Filled Tyres \*\*
- Non-Marking Tyres

#### Factory Hydraulic Oil

- No. 46 Hydraulic Oil (Mineral Oil)\*\*

### Additional Items

- GPS Unit
- Biodegradable Hydraulic Oil
- AC Power Cord to Platform
- Air Line to Platform
- Work Light Package
- Footpedal Switch
- Anti-Collision Bar on Platform
- Visual Spirit Level
- Hydraulic Generator
- Oil-Water Separator
- Outrigger Pad Package
- Guard Mesh Package
- Self-Lubrication System

\*\* Factory Default, If You Have Other Needs, Please Inform Dingli Regional Sales.

## ZHEJIANG DINGLI MACHINERY CO., LTD.

No.188 Qihang Road,Deqing,Zhejiang P.R.China 313219

Telephone +86(572)8681688

Fax +86(572)8681960

E-Mail [export@cndingli.com](mailto:export@cndingli.com)

[Http://www.cndingli.com](http://www.cndingli.com)

