

## Bottom Mount, 1 Glass Door, Upright Fridge

Range: EziCore

SKOPE ID: EB60BYN

Dimensions: 740 mm (W) × 795 mm (D) × 2205 mm (H)

Capacity: 559 L

Project: \_\_\_\_\_

Item #: \_\_\_\_\_



A high-efficiency, bottom-mounted, one glass door display fridge designed to display and store ready-to-serve chilled food and drinks. Suitable for a range of front of house applications such as bars, restaurants, clubs, pubs, cafés, convenience stores, supermarkets, and quick service restaurants. It is engineered to serve cold drinks at 0°C to 5°C in ambient environments of up to 35°C and is GEMS-compliant as well as food-safe with 3M1 climate class. The fridge is made from powder-coated, galvanised steel with black exterior and white interior, and you can customise the lit sign panel with your own branding. The double-glazed door helps prevent condensation and includes built-in LED lights in the door frame to ensure excellent merchandising of your products. The self-contained fridge uses R290 natural refrigerant for ultra-low energy consumption, low heat discharge and low noise output. The bottom-mounted refrigeration cartridge can be removed in line with best practice for safe servicing of flammable refrigerants. The fridge is certified to all Australian and New Zealand refrigeration and electrical safety standards.




Warranty



Natural Refrigerant



GEMS

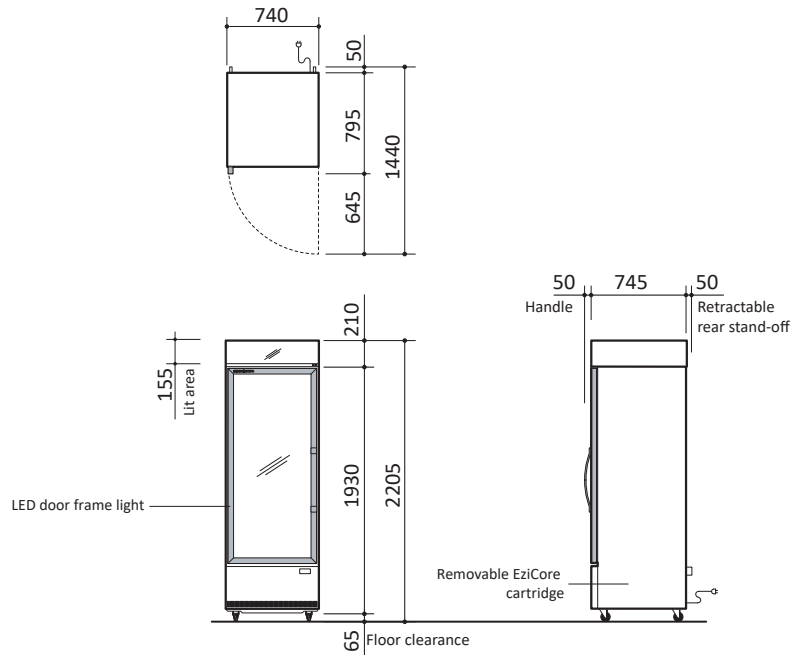

### Cabinet

<b>Type</b>	BCE Fridge		
<b>Finish</b>	Powdercoated galvanised steel		
<b>Insulation</b>	Type	PU foam	
	Thickness (mm)	50	
	Blowing Agent	Cyclo-iso pentane (CSH10/CSH12)	
<b>Doors</b>	Type	Glass swing door (double-glazed, argon-filled, toughened safety glass)	
	Opening Size	Height (mm)	1455
		Width (mm)	640
<b>Shelving</b>	Five plastic-coated wire shelves 4 × full width adjustable height shelf (620W × 505D), 1 × adjustable height bottom shelf (625W × 515D)		
<b>Lighting</b>	Sign	1 × 3 W, 490 mm LED	
	Interior	2 × 6 W, 1360 mm LED in door frame	

### Dimensions†

	External	Internal	Packed
<b>Width (mm)</b>	740	640	755
<b>Depth (mm)</b>	795	600	820
<b>Height (mm)</b>	2205 (castors)	1455	2205
<b>Weight (kg)</b>	TBC		TBC
<b>Capacity (L)</b>	559		
<b>Footprint (m<sup>2</sup>)</b>	0.59		

### Ventilation (mm)

<b>Top</b>	50	<b>Sides</b>	Not required	<b>Rear</b>	50
------------	----	--------------	--------------	-------------	----

### Performance

<b>Product Temperature Range (°C)</b>	0 to +5
<b>Maximum Ambient Temperature (°C)</b>	35
<b>Sound Level (dB(A))</b>	Standard <65

### Greenhouse and Energy Minimum Standards (GEMS)

<b>Star Rating</b>	8
<b>Product Temperature Class</b>	M1 (-1 to 5°C)
<b>Total Energy Consumption</b>	3.04 kWh/24 h
<b>Annual Running Costs</b>	\$333 (@ \$0.30/kWh)

### Electrical

<b>Supply</b>	220-240 volts a.c., 50 Hz, single phase supply
<b>Cord</b>	2 m power cord with 3-pin, 10 amp plug
<b>Current draw (A)</b>	2.6

### Refrigeration

<b>Controller</b>	Chunchang C212
<b>System Type</b>	Removable cartridge
<b>Cartridge Weight (kg)</b>	TBC
<b>Refrigerant/Charge</b>	R290/84 g
<b>Nominal Capacity (W)</b>	670 (EN12900 MBP)
<b>Heat Rejection (W)</b>	Average 125      Peak 140
<b>Defrost Type</b>	Automatic, off-cycle
<b>Drainage</b>	No plumbing required

### Dimensional Tolerances

† Allow for dimensional tolerances when installing the cabinet(s).

Linear dimensions	Single cabinet	Multiple cabinets	
		At each joint	At each end wall
Less than 1 metre	±5 mm	±5 mm	+15 mm
More than 1 metre	-5 mm to +10 mm	-5 mm to +10 mm	+15 mm



BCE600N  
on the SKOPE website

