


# XE45U MINI EXCAVATOR



Operating Weight: 4200KG  
 Engine: YANNER 3TNV88  
 Power: 36.5HP/27.1KW@3000RPM  
 Zero Tail Swing  
 Swing Boom/Arm  
 A/C Cold And Warm Cabin

☎ 0401 347 788  
 ☎ 03 8900 2987  
 ✉ Info@mxg.com.au

🌐 www.mxg.com.au  
 📍 Melbourne Branch: 10-14 Citrus St, Braeside VIC 3195  
 📍 Brisbane Branch: 15-19 Elliott Court Hillcrest QLD 4118

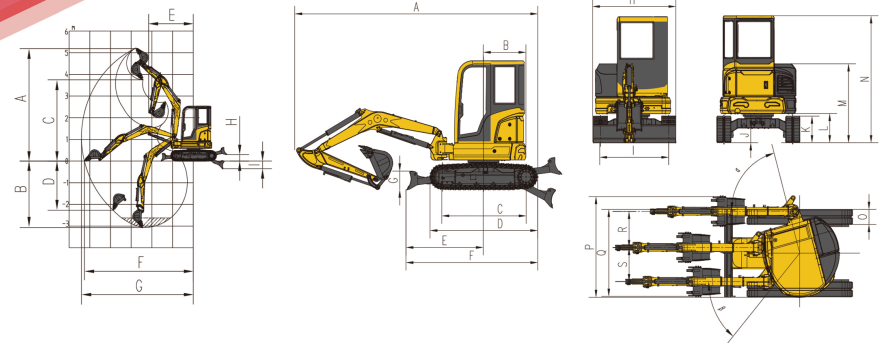

## Working range

		XE45U
A	Maximum digging height-std arm	5000mm
	Maximum digging height-long arm	5175mm
B	Maximum digging depth- std arm	3060mm
	Maximum digging depth- long arm	3264mm
C	Maximum dumping height- std arm	3600mm
	Maximum dumping height - long arm	3853mm
D	Maximum vertical wall digging depth-std arm	2260mm
	Maximum vertical wall digging depth-long arm	2384mm
E	Minimum swing radius- std arm	2170mm
	Minimum swing radius- long arm	2214mm
F	Maximum digging reach at ground level- std arm	5200mm
	Maximum digging reach at ground level- long arm	5407mm
G	Maximum digging reach- std arm	5300mm
	Maximum digging reach- long arm	5546mm
H	Maximum dozer lifting height	305mm
I	Maximum dozer cutting depth	360mm

## Dimensions

		XE45U
A	Over length	4960mm
B	Tail slew radius	870mm
C	Tumbler length	1721mm
D	Track length	2200mm
E	Dozer blade, maximum reach at ground level	1590mm
F	Undercarriage length	2690mm
G	Dozer blade height	367mm
H	Overall width	1740mm
I	Track gauge	1440mm
J	Minimum ground clearance	297mm
K	Track height	531mm
L	Ground clearance of counterweight	587mm
M	Over all height of tank hood	1590mm
N	Overall height	2535mm
O	Track shoe width	300mm
P	Working width at maximum right-hand rotation	2005mm
Q	Working width at maximum left-hand rotation	1728mm
R	Maximum boom offset to the right	770mm
S	Maximum boom offset to the left	580mm
α	Maximum boom swing angle to the left	75°
β	Maximum boom swing angle to the right	50°

## Standard and Optional Equipment

### Engine

Yanmar engine 3TNV88 36.5HP/27.1KW@3000RPM

### Hydraulic system

Single or dual way pipeline [AUX1]   
 Dual way pipeline [AUX2]   
 Hydraulic quick coupler line   
 Fingertip proportional control

### Cab & interior

TOPS/ROPS   
 OPG   
 Adjustable seat   
 Textile and permeable suspension seat with retractable belt   
 Air conditioning   
 Colour LCD monitor   
 AM/FM radio with Bluetooth   
 DAB radio with Bluetooth

### Undercarriage

Fixed undercarriage   
 Dozer blade   
 Rubber tracks 300 mm   
 Steel tracks 300 mm

### Safety

Boom, arm and dozer cylinder safety valves   
 Travel alarm   
 Rotation beacon   
 Engine overheat warning and restart prevention system   
 Quick coupler switch with alarm   
 Emergency stop switch   
 Front and top cab protection   
 LED work lights (2 on cab-front, 1 on cab-rear, 1 on boom)

### Other

Standard arm 1350 mm   
 Long arm 1600 mm   
 General purpose bucket 0.12 m³

Standard:   
 Optional:

- Some of these standard or optional equipment may not be available for certain markets.  
 - Pictures may include attachments and optional equipment that are not available in your area.  
 - Materials and specifications are subjected to change without advance notice.  
 - Please contact your local XCMG dealer for more information on availability or to customise your machine to suit your applications requirements.

MXG Machinery assume no responsibility or liability for any errors or omissions in the content of this brochure. Specifications from the manufacturer are subject to change without notice. Refer to our sales team for model details at time of purchase.