

## CMC S19HD

The CMC S19HD Spider Lift features an extremely compact stabilisation area with full side reach, including the ability to self-level on steep, sloped floors and terrain.


The S19HD is also capable of setting up in "narrow mode," with an even smaller footprint. This special feature reduces outreach; however, the lift is still capable of full 360° rotation and full vertical height.


Designed and built with a configuration of one lower riser pantograph and two telescopic boom extensions, the S19HD has a 200 kg basket capacity and 180° basket rotation, with a working height of nearly 19 m. Compact dimensions of 0.95 m width x 2.04 m height allow access to virtually any work area.


18.7<sub>M</sub> **WORKING HEIGHT** 


**monitor** Access




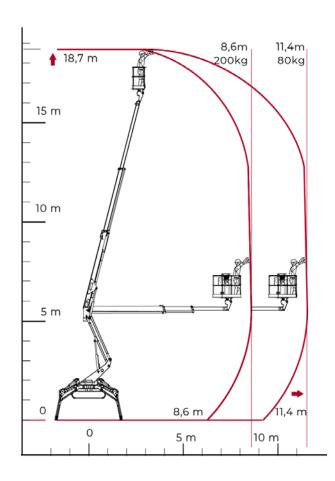









## Technical **Specifications**

Max working height	18.7 m
Max platform height	16.7 m
Max horizontal outreach (with 80 kg)	11.4 m
Max rated capacity	200 kg
Weight	2880v kg
Basket dimensions	1.4 x 0.7 x 1.1 m
Basket rotation	+90°/-87°
Gradeability	27°
Turret rotation	±355° (710° contnuous)
Standard engine	Kubota 14 HP Diesel & 240V Electric Motor
Radio control	Std

(All specs E&OE and subject to change)







## Our Locations Branches & Service Centres



**Tamworth** 

143 Gunnedah Rd Tamworth NSW 2340



49-50 Cassola Pl Penrith NSW 2740



Melbourne

24-28 William Rd Dandenong South VIC 3175



**Brisbane** 

191 Magnesium Dr Crestmead QLD 4132



**Brisbane - Caboolture** 

2 Alta Road Caboolture QLD 4510



**Perth** 

11 Reihill Rd Maddington WA 6109



agent@monitor.net.au

1800 025 024 monitor.net.au









