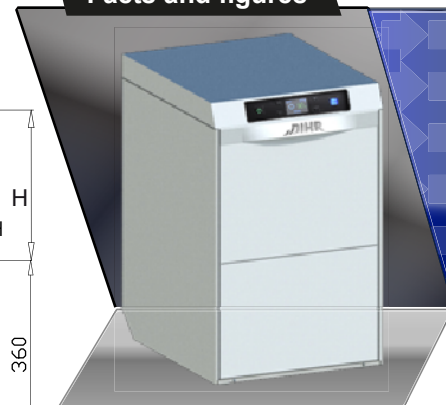

Facts and figures


- WATER CONNECTION 3/4" GAS**
- DRAINING PIPE Ø 24mm**
- ELECTRICAL SUPPLY**

TECHNICAL DATA	PARTIAL DRAINING							CLEAN WATER(**)		
EXTERNAL DIMENSIONS										
width	460 mm									
depth	550 mm									
height	780mm									
WEIGHT(basic version)	50 kg									
VOLTAGE	230V 50Hz / 230V V3 50Hz / 400V 3N 50Hz									
POWER REQUIRED	3250 W									
WATER HARDNESS	< 8 °f									
INLET WATER PRESSURE	200 - 400 kPa									
CROCKERY DIMENSIONS										
useful opening (H)	310 mm									
RACK DIMENSIONS	400x400 mm									
RACK EQUIPMENT	2xC21 - 1x10728 - 1x15060									
WASHING CYCLES (sec)	0(21÷680)(***)	1(60)	2(90)	3(120)	4(90)	5(120)	6(120)	7(170)		
WATER SUPPLY 55°C										
racks/h(*) ⁽¹⁾	/	43	40	30	27	27	19	19		
WATER SUPPLY 10°C										
racks/h(*) ⁽¹⁾	/	13	13	13	11	11	8	8		
WATER CONSUMPTION/CYCLE	/	GLASSES 3,0 l			DISHES 3,0 l		CLEAN WATER 4,0 l			
WATER CONDUCTIVITY	> 200 µS / cm									
BOILER CAPACITY	5,5 l									
BOILER HEATING ELEMENT	3000 W									
RINSING TEMPERATURE (SET)	70÷90°C	70°C			82°C		82°C			
TANK CAPACITY	7,0 l							4,0 l		
TANK HEATING ELEMENT	2100 W									
TANK TEMPERATURE (SET)	50÷70°C	60°C								
washing/rinsing PUMPS	250 / 250 W									
DRAIN PUMP	25W h max draining 0,8 m									
NOISE	59,9±0,7 dB(A)									

(*) STANDARD TERMOSTOP / () TOTAL DRAINING EVERY CYCLE / (***) CUSTOM CYCLE**

⁽¹⁾ In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.