




# HA Flood Light

## Explosion Proof Flood Light

---

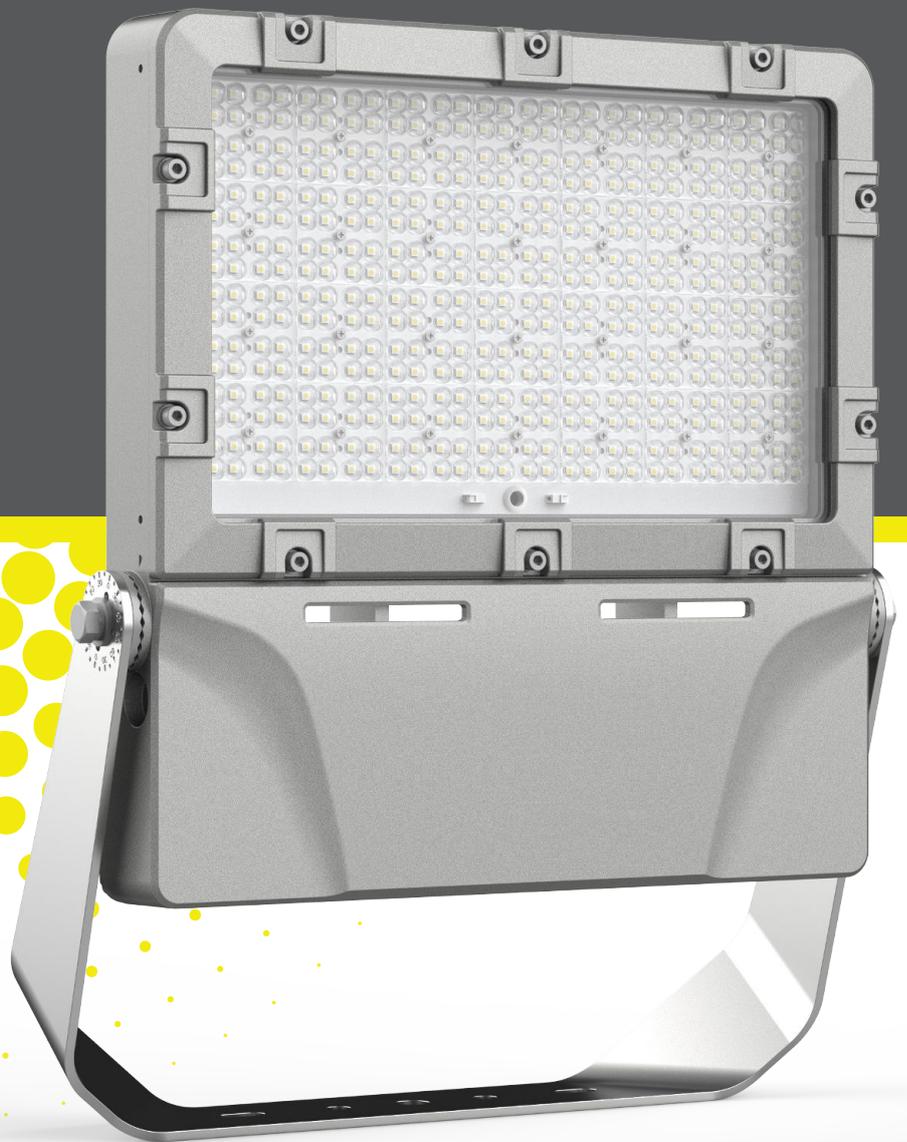

**EarthLight**  <sup>TM</sup>  
TRADE

Industrial & Commercial Lighting  
[earthlight.com.au](http://earthlight.com.au)


# HA Flood Light

## Explosion Proof Flood Light

The HA Flood Light features a robust structure and effective thermal management. Designed for flammable gas, wet, and marine environments, it features heavy duty stainless steel hardware, low-copper aluminum housing, and an anti-corrosive coating.

90° Adjustable  
Rotation

- ✓ Explosion-Proof Certified — IECEx-approved for hazardous locations
- ✓ High Output Performance — 240W delivering 36,000 lumens
- ✓ Reliable Power — Inventronics driver, 100–277VAC input
- ✓ Anti-Corrosive Build — IK08-rated housing for harsh environments
- ✓ Ingress Protection — IP66 dust-tight and water-resistant
- ✓ Secure Installation — M25 cable entry for safe wiring

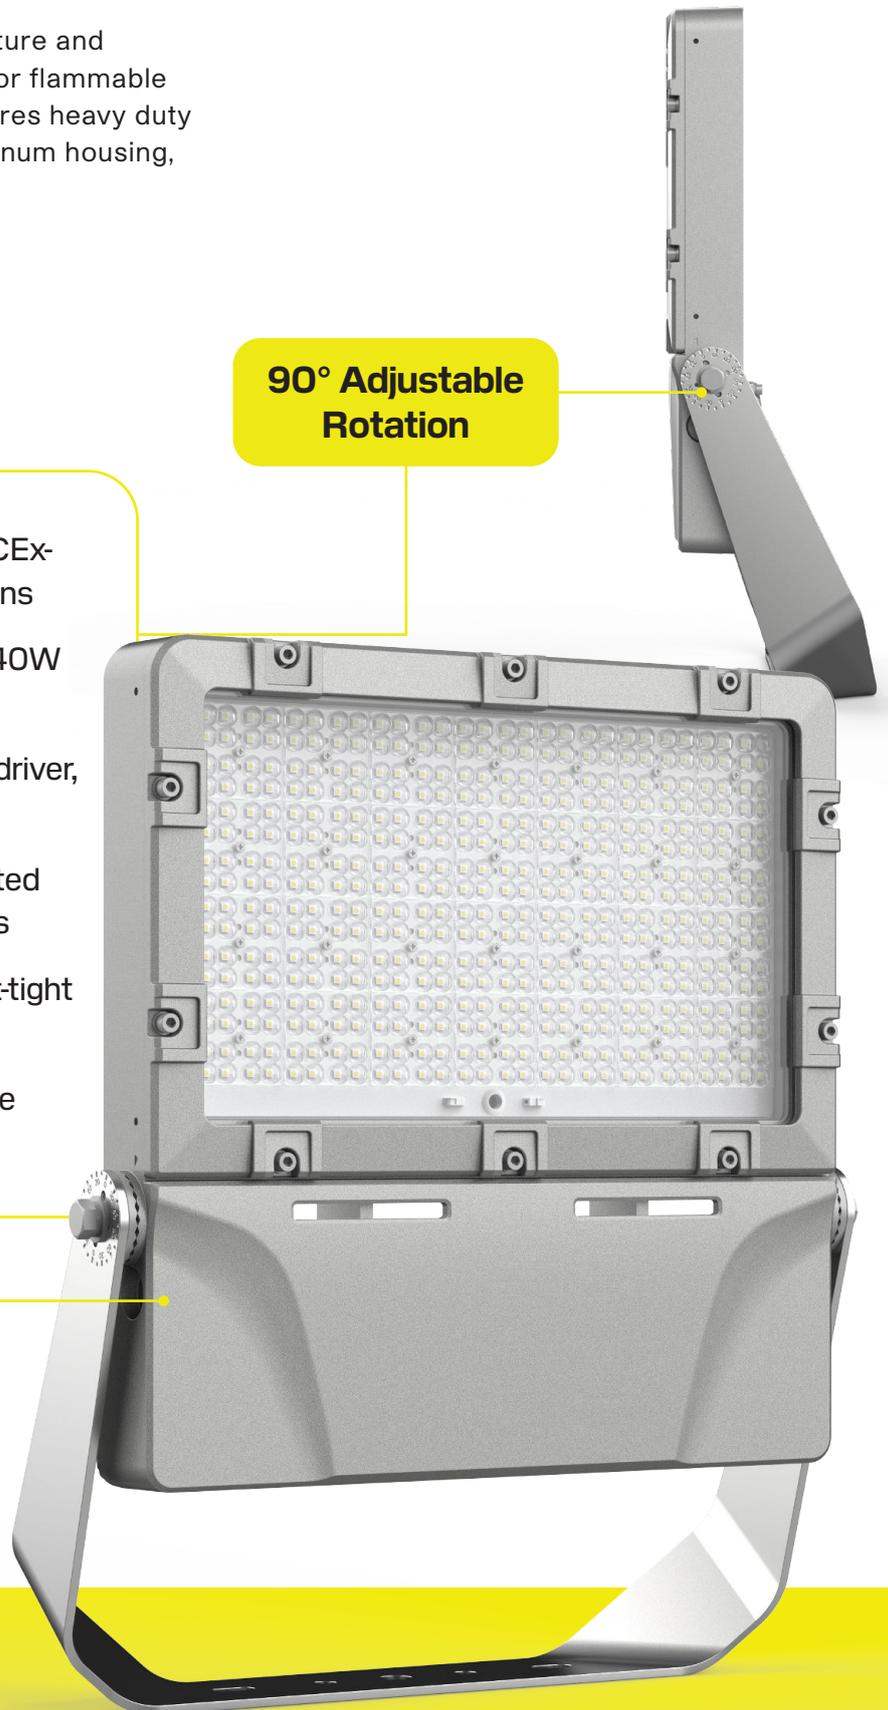

earthlight.com.au  
1300 410 485  
sales@earthlight.com.au


# HA Flood Light

## Specifications

CODE	ETG-10XD085
Luminous flux (lm)	36000lm
Dimensions (mm)	567x473x174mm (22.32" x18.62"x6.86")
Weight (Kg)	13±0.3kg(28.6±0.66Lbs)
Luminous efficacy (lm/W)	150lm/W
CCT	5000K (2000K, 2200K, 2500K, 2700K, 3000K, 3500K, 4000K, 4500K, 5700K, 6500K optional) / Red, Green, Blue, Amber
Fixture Color	Grey
Color Rendering Index	Ra70/Ra80/Ra90
Life Time of LED @Ta=25°C	75198 hrs-L90   230119 hrs-L80   378051 hrs-L70
IP Rating	IP66
IK Rating	IK08
Operating Temperature	-40°C to + 50°C
Warranty	5 Years



**EarthLight**  <sup>TM</sup>  
**TRADE**

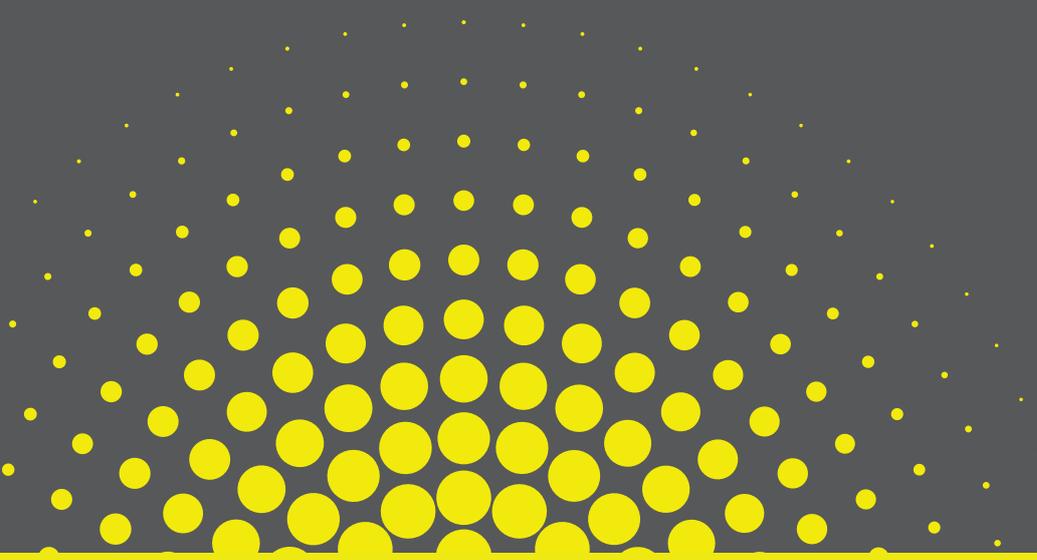

Industrial & Commercial Lighting  
[EarthLight.com.au](http://EarthLight.com.au)

**ILLUMINATE**<sup>TM</sup>  
**BETTER**