


Product Advantages:

- Made of food quality stainless steel.
- Insulation of walls 45 mm rock wool + 20 mm melamine foam.
- Insulation of door 45 mm thick with rock wool.
- Inside entirely radiused, with press-drawn sliders and base.
- Door with removable seal opens 270°.
- Carrying handles on sides and back.
- Wheels Ø 160 mm with polyamide cover, 2 with brakes.
- Circumferential bumper.
- Fan-assisted refrigeration controlled by an electronic thermostat with digital readout and the following functions:
 - Adjustment range of set value from 0 to 10 °C.
 - Possibility of deferred start.
 - Dysfunction alarms for cabinet and refrigerated unit maintenance.
- Spiral power cable 3G1.5 with moulded plug + plug support.

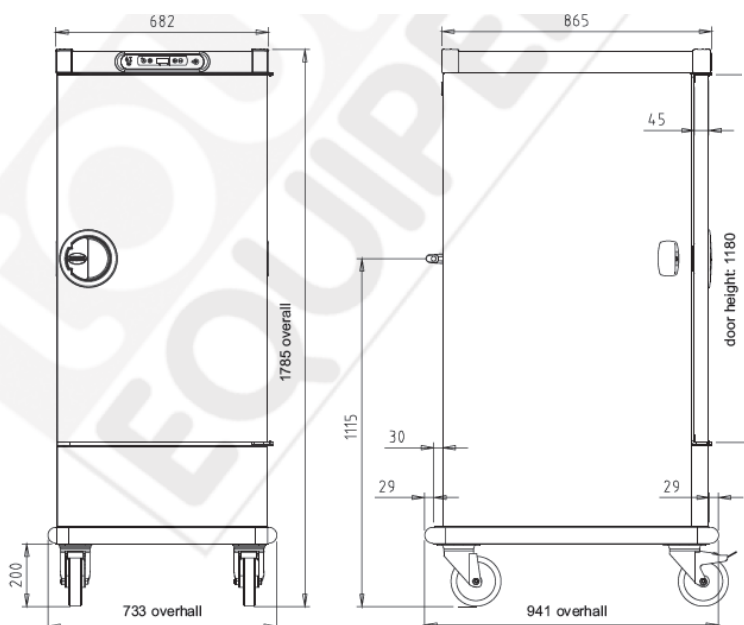

Technical Data:

Loading	15 GN2/1 containers h. 65 mm 30 GN1/1 containers h. 65 mm
Space between sliders	71 mm
External dimensions	733 x 941 x 1785 mm
Internal dimensions	535 x 710 x 1105 mm
External volume	1.048 m ³
Internal volume	0.42 m ³
Weight when empty	144 kg
Max. loading	240 kg
Voltage	240 1 phase AC – 50 Hz
Power input (W)	325
Max current (A)	2.3
Power consumption	0.32 kwh
Protection index	25
Type of refrigerant	R134A
Power refrigerating	380 W
Standards	NF EN 60335-1 NF EN 60335-2-89