



Hot gas defrost reduces energy consumption & maintenance (ZN units excluded)

Simple plug-in operation reduces installation cost & time

Low-profile evaporator (drop-in units only) maximises internal cool/freezer room storage space

Reliable L'Unite Hermetique compressor ensures unit longevity

High 45°C tropical ambient temperature rating for reliability in Australian conditions

Three-pin plug with 2m lead for instant power connection

Condensate evaporation system eliminates the need for drainage (drop-in & slide-in units only)*



* (Drainage may be required in extreme ambient conditions or when storing high-water-content produce)

Bromic Refrigeration are the exclusive Australian distributor of Zanotti's industry-leading cool room refrigeration systems, providing unparalleled functionality and high-performance in Australian conditions.

113. Zanotti Drop-In Refrigeration Systems

Zanotti's Drop-In Refrigeration Systems offer the highest performance and simplest installation within the drop-in category, supplied as a single-phase, plug-in unit with a prewired bulkhead light and a hot gas vaporisation system that eliminates drainage requirements.*



114. Zanotti Split/Remote Refrigeration Systems

Zanotti's Split/Remote Refrigeration Systems enable installation of the condensing unit in a well-ventilated area up to 10m away from the evaporator, connected with pre-charged refrigerant piping and quick connection joints for simple installation.



115. Zanotti Slide-In Refrigeration Systems

Zanotti's Slide-In Refrigeration Systems offer the highest performance and simplest installation within the slide-in category, supplied as a single-phase, plug-in unit with a prewired bulkhead light and a hot gas vaporisation system that eliminates drainage requirements.*



117. Zanotti Rotary Refrigeration Systems

Zanotti's Rotary Refrigeration Systems are purpose-designed for the portable preservation of fresh produce, delivering powerful refrigeration from within a package that requires no additional protection to operate externally, whatever the weather.



118. Zanotti Wine Block Refrigeration Systems

Zanotti's Wine Block Refrigeration Systems perfectly maintain temperature and humidity to aid in the delicate development and preservation of a wine's aroma, colour and flavour.




119. Specification Reference Guide

PROFESSIONAL RANGE

Refrigeration Systems

Zanotti Drop-In Refrigerated Systems

PROFESSIONAL RANGE

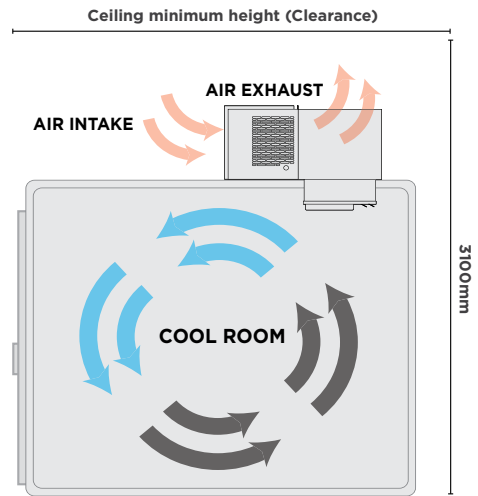

Dropping in from above with minimal protrusion into the room, this system requires vertical clearance for adequate air flow



Digital Controller



Internal light included



No plumbed drainage required

Chiller Freezer

1 YEAR WARRANTY PARTS

Zanotti SB Range Drop-In Refrigerated Chiller Systems

- Hot gas defrost reduces energy consumption and maintenance
- Prewired for included bulkhead lighting along with door switches and door heaters
- Touchscreen digital controller enables simple programming and customisation
- Condensate evaporation system eliminates the need for drainage*

MSB125T

Part No. 3835102 Weight 59kg

Run/Full Load Capacity 5.2 / 7.3A 1559W

MSB225N

Part No. 3835103 Weight 74kg

Run/Full Load Capacity 6.3 / 12.0A 2406W

MSB225T

Part No. 3835104 Weight 75kg

Run/Full Load Capacity 7.0 / 12.5A 2667W

MSB135N

Part No. 3835106 Weight 92kg



Run/Full Load Capacity 8.9 / 16.4A 4100W

MSB135T

Part No. 3835105 Weight 93kg

Run/Full Load Capacity 12.2 / 21.4A 4722W

DIMENSIONS:



| MODEL / MM | MSB125T / BSB125T | MSB225N / MSB225T / BSB225T | MSB135N / MSB135T / BSB135T |
|------------|-------------------|-----------------------------|-----------------------------|
| A | 357 | 390 | 427 |
| B | 337 | 427 | 427 |
| C | 382 | 382 | 502 |
| D | 340 | 360 | 410 |
| E | 150 | 150 | 220 |
| F | 332 | 332 | 452 |
| G | 620 | 820 | 820 |
| H | 606 | 540 | 845 |
| I | 545 | 745 | 745 |

1 YEAR WARRANTY PARTS

Zanotti SB Range Drop-In Refrigerated Freezer Systems

- Hot gas defrost reduces energy consumption and maintenance
- Prewired for included bulkhead lighting along with door switches and door heaters
- Touchscreen digital controller enables simple programming and customisation
- Condensate evaporation system eliminates the need for drainage*

BSB125T

Part No. 3835150 Weight 68kg

Run/Full Load Capacity 5.5 / 11.3A 1249W

BSB225T

Part No. 3835151 Weight 87kg

Run/Full Load Capacity 7.6 / 17.2A 1782W

BSB135T

Part No. 3835152 Weight 102kg

Run/Full Load Capacity 12/25A 2611W

Refrigeration Systems

PROFESSIONAL RANGE


Zanotti Split/Remote Refrigerated Systems



Evaporator



Condenser

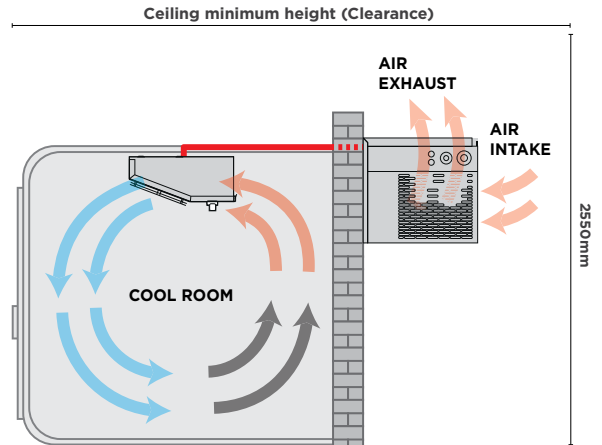

Joined to the in-room evaporator with pre-charged, quick-connect piping, this system's remote condenser can operate up to 10m away in fresh air

Chiller Freezer

SPECIAL ORDER ONLY

Zanotti SP Range Split/Remote Refrigerated Chiller Systems

- Pre-charged piping with quick-connect joints for rapid installation
- Prewired for included bulkhead lighting along with door switches and door heaters
- Hot gas defrost reduces energy consumption and maintenance
- Touchscreen digital controller enables simple programming and customisation

MSP121T

Part No. 3835301
Weight 56kg

Run/Full Load 4.6 / 6.4A
Capacity 1311W

MSP221N

Part No. 3835302
Weight 78kg

Run/Full Load 6.3 / 12.0A
Capacity 2296W

MSP221T

Part No. 3835303
Weight 80kg

Run/Full Load 7.0 / 12.5A
Capacity 2567W

MSP135T

Part No. 3835304
Weight 98kg

Run/Full Load 11.2 / 21.4A
Capacity 4563W





Digital Controller




Internal light included

| MODEL / mm | MSP121 | MSP/BSP221N/T | MSP/BSP135N/T |
|------------|--------|---------------|---------------|
| A | 357 | 390 | 427 |
| B | 337 | 427 | 427 |
| C | 620 | 820 | 820 |
| D | 614 | 1034 | 1614 |
| E | 654 | 1074 | 1654 |

DIMENSIONS:

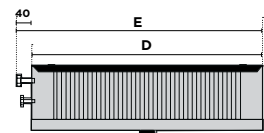

Evaporator

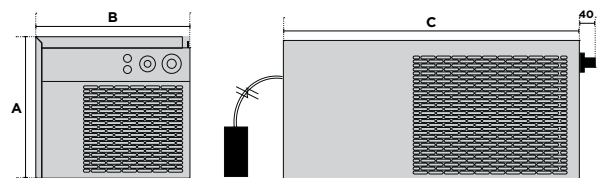

Condensing Unit

SPECIAL ORDER ONLY

Zanotti SP Range Split/Remote Refrigerated Freezer Systems

- Pre-charged piping with quick-connect joints for rapid installation
- Prewired for included bulkhead lighting along with door switches and door heaters
- Hot gas defrost reduces energy consumption and maintenance
- Touchscreen digital controller enables simple programming and customisation

BSP221N

Part No. 3835351
Weight 80kg

Run/Full Load 6.1 / 11.9A
Capacity 1507W

BSP135N

Part No. 3835352
Weight 100kg

Run/Full Load 11.2 / 18.4A
Capacity 2295W

BSP135T

Part No. 3835353
Weight 106kg


Run/Full Load 11.3 / 25.4A
Capacity 2613W



Refrigeration Systems

Zanotti GM Range | Slide-In Refrigerated Systems

PROFESSIONAL RANGE

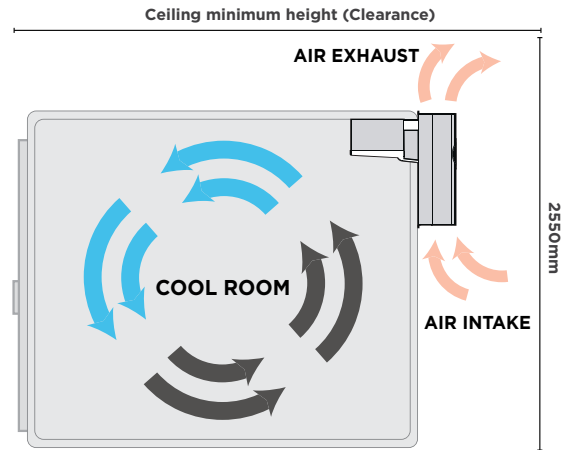

Sliding in from the side, this slim system utilises a vertical air path to minimise clearance requirements

Chiller Freezer

SPECIAL ORDER ONLY



Zanotti GM Range Slide-In Refrigerated Chiller Systems

- Touchscreen digital controller enables simple programming and customisation
- Prewired for included bulkhead lighting along with door switches and door heaters
- Hot gas defrost reduces energy consumption and maintenance
- Suitable for straddle-wall installation only

| MGM106 | | MGM110 | |
|---------------|----------|---------------|----------|
| Part No. | Weight | Part No. | Weight |
| 3835201 | 56kg | 3835203 | 64kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 4.4 / 6.2A | 1299W | 5.6 / 11.3A | 1697W |
| MGM211 | | MGM213 | |
| Part No. | Weight | Part No. | Weight |
| 3835204 | 80kg | 3835205 | 80kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 6.7 / 12.4A | 2274W | 8.7 / 11.9A | 2971W |
| MGM315 | | MGM320 | |
| Part No. | Weight | Part No. | Weight |
| 3835206 | 98kg | 3835207 | 100kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 8.2 / 15.8A | 3996W | 11.6 / 20.8A | 4455W |



New touchscreen digital controller





Internal light included



No plumbed drainage required*

DIMENSIONS:

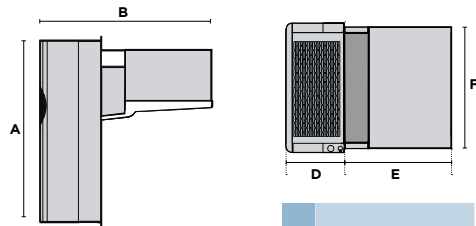

| MODEL / MM | MGM106 / MGM110 | MGM211 / 213 BGM218 / 220 | MGM315 / 320 BGM320 / 330 |
|------------|-----------------|-----------------------------|-----------------------------|
| A | 735 | 830 | 830 |
| B | 790 | 790 | 862 |
| C | 400 | 620 | 620 |
| D | 280 | 280 | 350 |
| E | 510 | 510 | 512 |
| F | 368 | 585 | 585 |

SPECIAL ORDER ONLY

Zanotti GM Range Slide-In Refrigerated Freezer Systems




- Touchscreen digital controller enables simple programming and customisation
- Prewired for included bulkhead lighting along with door switches and door heaters
- Hot gas defrost reduces energy consumption and maintenance
- Suitable for straddle-wall installation only

| BGM218 | | BGM220 | |
|---------------|----------|---------------|----------|
| Part No. | Weight | Part No. | Weight |
| 3835254 | 80kg | 3835251 | 80kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 6.4 / 9.8A | 1487W | 8.1 / 17.7A | 1779W |
| BGM320 | | BGM330 | |
| Part No. | Weight | Part No. | Weight |
| 3835252 | 105kg | 3835253 | 105kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 8.1 / 17.7A | 2392W | 10.7 / 24.8A | 2820W |

Refrigeration Systems

PROFESSIONAL RANGE

Zanotti ZN Range | Slide-In Refrigerated Systems

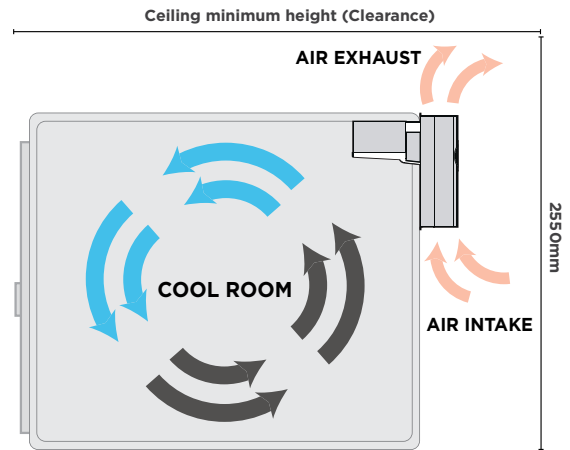

Sliding in from the side, this slim system utilises a vertical air path to minimise clearance requirements

Chiller Freezer



Zanotti ZN Range Slide-In Refrigerated Chiller Systems

- Digital temperature controller simplifies programming and adjustment
- Prewired for included bulkhead lighting along with door switches and door heaters
- Electric defrost to minimise downtime
- Suitable for straddle-wall installation only

| MZN106 | | MZN110 | |
|---------------|----------|---------------|----------|
| Part No. | Weight | Part No. | Weight |
| 3835210 | 49kg | 3835211 | 51kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 4.14 / 5.95A | 1355W | 5.19 / 7.32A | 1704W |

| MZN211 | | MZN213 | |
|---------------|----------|---------------|----------|
| Part No. | Weight | Part No. | Weight |
| 3835212 | 66kg | 3835213 | 66kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 6.54 / 8.20A | 2299W | 8.68 / 11.68A | 3006W |

| MZN315 | | MZN320 | |
|---------------|----------|---------------|----------|
| Part No. | Weight | Part No. | Weight |
| 3835214 | 85kg | 3835215 | 95kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 8.68 / 16.2A | 3925W | 12 / 21.2A | 4463W |



No plumbed drainage required*




Internal light included



Digital Controller

DIMENSIONS:

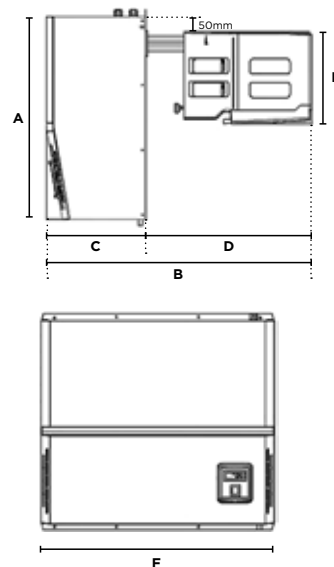

| MODEL / MM | MZN106 / MZN110 | MZN211 / MZN213 / BZN218 / BZN220 | MZN315 / MZN320 / BZN320 / BZN330 |
|------------|-----------------|-----------------------------------|-----------------------------------|
| A | 640 | 660 | 660 |
| B | 865 | 865 | 1055 |
| C | 355 | 325 | 430 |
| D | 510 | 540 | 625 |
| E | 270 | 300 | 375 |
| F | 400 | 760 | 760 |

Zanotti ZN Range Slide-In Refrigerated Freezer Systems

- Digital temperature controller simplifies programming and adjustment
- Prewired for included bulkhead lighting along with door switches and door heaters
- Electric defrost to minimise downtime
- Suitable for straddle-wall installation only



| BZN218 | | BZN220 | |
|---------------|----------|---------------|----------|
| Part No. | Weight | Part No. | Weight |
| 3835220 | 64kg | 3835221 | 76kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 6.34 / 9.73A | 1454W | 8.6 / 17.65A | 1807W |


| BZN320 | | BZN330 | |
|----------------|----------|----------------|----------|
| Part No. | Weight | Part No. | Weight |
| 3835222 | 85kg | 3835223 | 95kg |
| Run/Full Load | Capacity | Run/Full Load | Capacity |
| 11.04 / 18.25A | 2440W | 11.16 / 25.25A | 2605W |

Refrigeration Systems


Refrigeration Systems

Zanotti Rotary Refrigerated Systems

PROFESSIONAL RANGE



Lockable temperature display avoids accidental interference

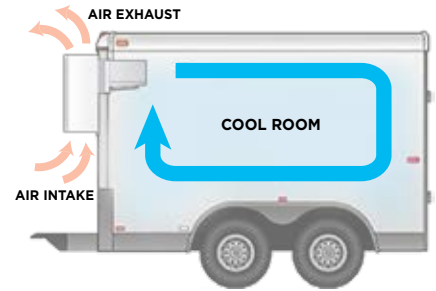

This rugged system has been purpose-designed for mobile cooling, featuring a weatherproof case, shockproof internals and flexible power supply

MAS123T

SPECIAL ORDER ONLY



1 YEAR WARRANTY PARTS

Zanotti AS Range Rotary Refrigerated Chiller System


| | |
|----------------------|-----------------|
| Part No. | Weight |
| 3835405 | 58 Kg |
| Run/Full Load | Capacity |
| 4.2 / 8.0A | 1657W |

- Portable unit with prewired electrical connections for rapid installation
- Compressor crankcase heater for reliable operation in cold climates
- Rugged ABS-material external casing withstands any weather
- Fixed 15A plug allows connection to mains power when stationary

DIMENSIONS:

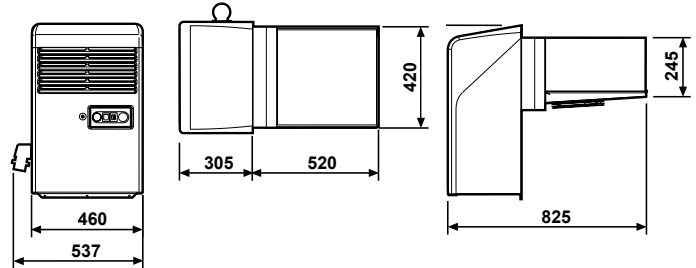

Lockable temperature display avoids accidental interference

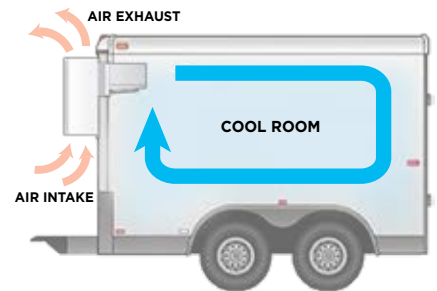

This rugged system has been purpose-designed for mobile cooling, featuring a weatherproof case, shockproof internals and flexible power supply

SPECIAL ORDER ONLY

1 YEAR WARRANTY PARTS


Zanotti AS Range Rotary Refrigerated Chiller System

- Portable unit with prewired electrical connections for rapid installation
- Compressor crankcase heater for reliable operation in cold climates
- Rugged ABS-material external casing withstands any weather
- Fixed 15A plug allows connection to mains power when stationary

| | | |
|----------------------|-----------------|---------------|
| MAS221T | Part No. | Weight |
| | 3835401 | 78kg |
| Run/Full Load | Capacity | |
| 8.06 / 9.26A | 2675W | |

| | | |
|----------------------|-----------------|---------------|
| MAS221N | Part No. | Weight |
| | 3835402 | 78kg |
| Run/Full Load | Capacity | |
| 5.76 / 6.76A | 2363W | |

DIMENSIONS:

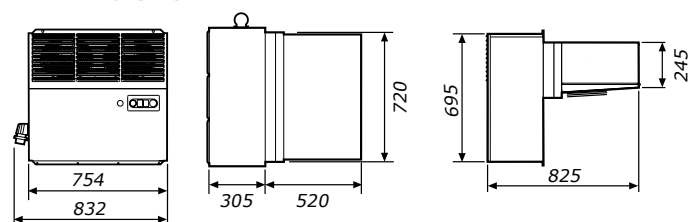


Refrigeration Systems

Zanotti Wine Block Refrigerated Systems

PROFESSIONAL RANGE



Digital Controller

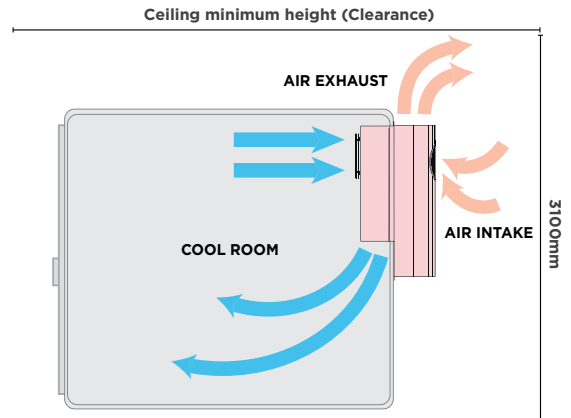

Sliding in from the side, this system's constant circulation maintains the perfect climate for delicate wines

SPECIAL ORDER ONLY

Zanotti CV Range Wine Block Slide-In Systems

- Wine block systems have adjustable humidity between 40-80%
- Constant circulation and humidity control creates a consistent climate
- Low energy consumption for a highly-efficient permanent storage solution
- Soundproofed condenser cover improves aesthetic appeal while minimising noise
- Water supply required for humidification



RCV102

Part No. 3835055
Weight 52kg

Run/Full Load 8.2 / 9.0A
Capacity 1000W

RCV201

Part No. 3835060
Weight 77kg

Run/Full Load 11.9 / 13.9A
Capacity 1400W


RCV202

Part No. 3835065
Weight 79kg

Run/Full Load 14.1 / 16.9A
Capacity 2000W

| MODEL / MM | RCV102 | RCV201 | RCV202 |
|------------|--------|--------|--------|
| A | 735 | 735 | 735 |
| B | 435 | 435 | 435 |
| C | 570 | 570 | 570 |
| D | 215 | 215 | 215 |
| E | 182 | 182 | 182 |
| F | 375 | 595 | 595 |
| G | 400 | 620 | 620 |

DIMENSIONS:

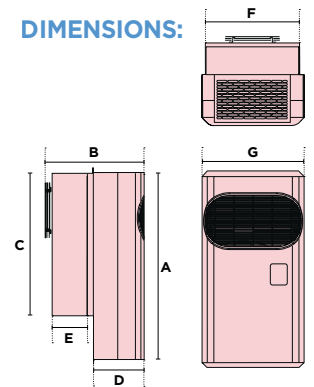


Evaporator



Condenser



Digital Controller

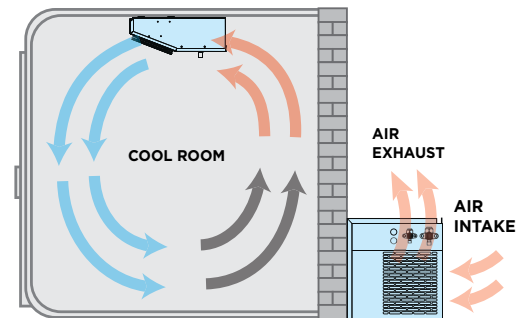

Joined to the in-room evaporator with pre-charged, quick-connect piping, this system's remote condenser can operate up to 10m away in fresh air

SPECIAL ORDER ONLY

Zanotti DV Range Wine Block Split Systems

- Constant circulation and humidity control creates a consistent climate
- Low energy consumption for a highly-efficient permanent storage solution
- Split system allows remote compressor mounting with quick-connect, pre-charged piping
- Water supply required for humidification



RDV102

Part No. 3835023
Weight 49kg

Run/Full Load 7.3 / 8.0A
Capacity 1000W

RDV201

Part No. 3835027
Weight 80kg

Run/Full Load 11.6 / 13.6A
Capacity 1400W


RDV202

Part No. 3835032
Weight 82kg

Run/Full Load 12.3 / 15.1A
Capacity 2000W

| MODEL / MM | RDV102 | RDV201 | RDV202 |
|------------|--------|--------|--------|
| A | 357 | 390 | 390 |
| B | 337 | 427 | 427 |
| C | 682 | 882 | 882 |
| D | 620 | 820 | 820 |
| E | 215 | 215 | 215 |
| F | 175 | 175 | 175 |
| G | 490 | 490 | 490 |
| H | 669 | 1089 | 1089 |
| I | 614 | 1034 | 1034 |

DIMENSIONS:

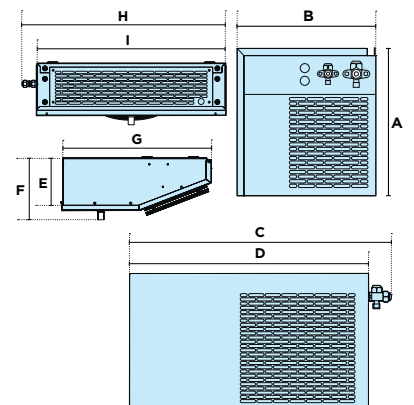

Refrigeration Systems

Specification Reference Guide

Chiller

Freezer

| DROP-IN MODELS | MSB125T | MSB225N | MSB225T | MSB135N | MSB135T | BSB125T | BSB225T | BSB135T |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|--------------|-------------|-------------|
| Part Number | 3835102 | 3835103 | 3835104 | 3835106 | 3835105 | 3835150 | 3835151 | 3835152 |
| Refrigeration Power | 1559W | 2406W | 2667W | 4100W | 4722W | 1249W | 1782W | 2611W |
| Temp. Range (°C)** | -5 to +10°C | -5 to +10°C | -5 to +10°C | -5 to +10°C | -5 to +10°C | -15 to -25°C | -25 to -5°C | -25 to -5°C |
| Max. Ambient Temp. (°C) | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C |
| Run/Full-Load (Amps) | 5.2/7.3A | 6.3/12.0A | 7.0/12.5A | 8.9/16.4A | 12.2/21.4A | 5.5/11.3A | 7.6/17.2A | 11.5/25.6A |
| Ext. Dimensions | See pg. 113 | See pg. 113 | See pg. 113 | See pg. 113 | See pg. 113 | See pg. 113 | See pg. 113 | See pg. 113 |
| Temp. Display | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital |
| Gross Weight (kg) | 59kg | 74kg | 75kg | 92kg | 93kg | 68kg | 87kg | 102kg |
| Refrigerant | R404a | R404a | R404a | R404a | R404a | R404a | R404a | R404a |
| Plug Supplied | 15A | 15A | 15A | 25A | 25A | 15A | 25A | 32A |
| Features | | | | | | | | |
| Defrost Type | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas |
| Type of Control | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic |
| Pre-wired For Internal Light | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Pre-wired For Heated Door Trim | | | | | | ✓ | ✓ | ✓ |
| No Drainage Required* | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Warranty | | | | | | | | |
| Parts (Years) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |




| SPLIT/REMOTE MODELS | MSP121T | MSP221N | MSP221T | MSP135T | BSP221N | BSP135N | BSP135T |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| Part Number | 3835301 | 3835302 | 3835303 | 3835304 | 3835351 | 3835352 | 3835353 |
| Refrigeration Power | 1311W | 2296W | 2567W | 4563W | 1507W | 2295W | 2613W |
| Temp. Range (°C)** | -5 to +10° | -5 to +10° | -5 to +10° | -5 to +10° | -25 to -15° | -25 to -15° | -25 to -15° |
| Max Ambient Temp (°C) | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C |
| Run/Full-Load (Amps) | 4.6/6.4A | 6.3/12.0A | 7.0/12.5A | 12.2/21.4A | 6.1/11.9A | 11.2/18.4A | 11.3/25.4A |
| Ext. Dimensions | See pg. 114 | See pg. 114 | See pg. 114 | See pg. 114 | See pg. 114 | See pg. 114 | See pg. 114 |
| Defrost Amps | 1.9A | 3.4A | 3.4A | 5.4A | 3.75A | 4.5A | 5.9A |
| Temp. Display | Digital | Digital | Digital | Digital | Digital | Digital | Digital |
| Gross Weight (kg) | 56kg | 78kg | 80kg | 98kg | 80kg | 100kg | 106kg |
| Refrigerant | R404a | R404a | R404a | R404a | R404a | R404a | R404a |
| Plug Supplied | 15A | 15A | 15A | 25A | 15A | 25A | 32A |
| Features | | | | | | | |
| Defrost Type | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic |
| Type of Control | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic |
| Pre-wired for Internal Light | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Pre-wired for Heated Door Trim | | | | | ✓ | ✓ | ✓ |
| No drainage Required* | | | | | | | |
| Warranty | | | | | | | |
| Parts (Years) | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

Refrigeration Systems

Chiller

Freezer

Specification Reference Guide

| WINE BLOCK MODELS | SPECIAL ORDER | | | SPECIAL ORDER | | |
|--------------------------------|------------------|------------------|-------------------|---|---|---|
| | SLIDE IN SYSTEM | | | SPLIT SYSTEM | | |
| | RCV102 | RCV201 | RCV202 | RDV102  | RDV201  | RDV202  |
| Part Number | 3835055 | 3835060 | 3835065 | 3835023 | 3835027 | 3835032 |
| Refrigeration Power | 1000W | 1400W | 2000W | 1000W | 1400W | 2000W |
| Recommended Room Capacity | 45m ³ | 60m ³ | 100m ³ | 45m ³ | 60m ³ | 100m ³ |
| Temp. Range (°C)** | +10 to +20°C | +10 to +20°C | +10 to +20°C | +10 to +20°C | +10 to +20°C | +10 to +20°C |
| Max Ambient Temp. (°C) | 40°C | 40°C | 40°C | 40°C | 40°C | 40°C |
| Run/Full Load (Amps) | 5.6/6A | 11.2/13.5A | 14.4/15.8A | 8.9/9.6A | 12.4/13.5A | 13.8/15.3A |
| Ext. Dimensions | See pg. 118 | See pg. 118 | See pg. 118 | See pg. 118 | See pg. 118 | See pg. 118 |
| Temp. Display | Digital | Digital | Digital | Digital | Digital | Digital |
| Gross Weight (kg) | 52kg | 77kg | 79kg | 49kg | 80kg | 82kg |
| Refrigerant | R404a | R404a | R404a | R404a | R404a | R404a |
| Plug Supplied | 10A | 15A | 25A | 15A | 15A | 25A |
| Features | | | | | | |
| Defrost Type | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas |
| Type of Control | Digital | Digital | Digital | Digital | Digital | Digital |
| Pre-wired For Internal Light | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Pre-wired For Heated Door Trim | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| No Drainage Required* | | | | | | |
| Warranty | | | | | | |
| Parts (Years) | 1 | 1 | 1 | 1 | 1 | 1 |

* Drainage may be required in extreme ambient conditions or when storing high-water-content produce

** Low temperature rated at -20°C internal temperature, 30°C ambient temperature and medium temperature at 5°C and 30°C.

Refrigeration Systems

Specification Reference Guide

Chiller

Freezer

| SLIDE-IN MODELS | SPECIAL ORDER | | | | | | SPECIAL ORDER | | | |
|--------------------------------|---------------|--------------|--------------|--------------|--------------|--------------|---------------|--------------|--------------|--------------|
| | MGM106 | MGM110 | MGM211 | MGM213 | MGM315 | MGM320 | BGM218 | BGM220 | BGM320 | BGM330 |
| Part Number | 3835201 | 3835203 | 3835204 | 3835205 | 3835206 | 3835207 | 3835254 | 3835251 | 3835252 | 3835253 |
| Refrigeration Power | 1299W | 1697W | 2274W | 2971W | 3996W | 4455W | 1487W | 1779W | 2392W | 2820W |
| Temp. Range (°C)** | -5 to +10° | -5 to +10° | -5 to +10° | -5 to +10° | -5 to +10° | -5 to +10° | -25° to -5° | -25° to -5° | -25° to -5° | -25° to -5° |
| Max Ambient Temp. (°C) | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C |
| Run/Full-Load (Amps) | 4.4/6.2A | 5.6/1.3A | 6.7/12.4A | 8.7/11.9A | 8.2/15.8A | 11.6/20.8A | 6.4/9.8A | 8.1/17.7A | 10.6/17.8A | 10.7/24.8A |
| Ext. Dimensions | See pg. 115 | See pg. 115 | See pg. 115 | See pg. 115 | See pg. 115 | See pg. 115 | See pg. 115 | See pg. 115 | See pg. 115 | See pg. 115 |
| Temp. Display | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital |
| Interior Light | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Gross Weight (kg) | 56kg | 64kg | 80kg | 80kg | 98kg | 100kg | 80kg | 80kg | 105kg | 105kg |
| Refrigerant | R404a | R404a | R404a | R404a | R404a | R404a | R404a | R404a | R404a | R404a |
| Plug Supplied | 15A | 15A | 15A | 15A | 25A | 25A | 15A | 25A | 25A | 25A |
| Features | | | | | | | | | | |
| Defrost Type | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas | Hot Gas |
| Type of Control | Touch Screen | Touch Screen | Touch Screen | Touch Screen | Touch Screen | Touch Screen | Touch Screen | Touch Screen | Touch Screen | Touch Screen |
| Pre-wired For Internal Light | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Pre-wired For Heated Door Trim | | | | | | | ✓ | ✓ | ✓ | ✓ |
| No Drainage Required* | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Warranty | | | | | | | | | | |
| Parts (Years) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

| ROTARY SYSTEM MODELS | SPECIAL ORDER | SPECIAL ORDER | SPECIAL ORDER |
|---------------------------|------------------|------------------|------------------|
| | MAS123T | MAS221T | MAS221N |
| Part Number | 3835405 | 3835401 | 3835402 |
| Refrigeration Power | 1657W | 2675W | 2363W |
| Temp. Range (°C)** | -5 to +10° | -5 to +10° | -5 to +10° |
| Max Ambient Temp. (°C) | 45°C | 45°C | 45°C |
| Run/Full-Load (Amps) | 4.2/8.0A | 8.06/9.26A | 5.76/6.76A |
| Single Phase Required | Yes | Yes | Yes |
| Ext. Dimensions | See pg. 117 | See pg. 117 | See pg. 117 |
| Temp. Display | Digital | Digital | Digital |
| Gross Weight (kg) | 58kg | 78kg | 78kg |
| Refrigerant | R407C | R407C | R407C |
| Recommended Room Capacity | 10m ³ | 19m ³ | 19m ³ |
| Plug Supplied | 15A | 15A | 15A |
| Features | | | |
| Defrost Type | Hot Gas | Hot Gas | Hot Gas |
| Type of Control | Electronic | Electronic | Electronic |
| Warranty | | | |
| Parts (Years) | 1 | 1 | 1 |

Refrigeration Systems

Specification Reference Guide

Chiller

Freezer

| SLIDE-IN MODELS | MZN106 | MZN110 | MZN211 | MZN213 | MZN315 | MZN320 | BZN218 | BZN220 | BZN320 | BZN330 |
|--------------------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------|--------------|
| Part Number | 3835210 | 3835211 | 3835212 | 3835213 | 3835214 | 3835215 | 3835220 | 3835221 | 3835222 | 3835223 |
| Refrigeration Power | 1355W | 1704W | 2299W | 3006W | 3925W | 4463W | 1454W | 1807W | 2440W | 2605W |
| Temp. Range (°C)** | -5° to +10° | -5° to +10° | -5° to +10° | -5° to +10° | -5° to +10° | -5° to +10° | -25° to -5° | -25° to -5° | -25° to -5° | -25° to -5° |
| Max Ambient Temp. (°C) | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C | 45°C |
| Run/Full-Load (Amps) | 4.14/5.95A | 5.19/7.32A | 6.07/8.2A | 8.68/11.86A | 8.7/16.2A | 12/21.2A | 6.34/9.73A | 8.06/17.65A | 11.04/18.25A | 11.16/25.25A |
| Ext. Dimensions | See pg. 116 | See pg. 116 | See pg. 116 | See pg. 116 | See pg. 116 | See pg. 116 | See pg. 116 | See pg. 116 | See pg. 116 | See pg. 116 |
| Temp. Display | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital |
| Interior Light | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes | Yes |
| Gross Weight (kg) | 41kg | 50kg | 68kg | 66kg | 85kg | 95kg | 67kg | 76kg | 85kg | 95kg |
| Refrigerant | R404a | R404a | R404a | R404a | R404a | R404a | R404a | R404a | R404a | R404a |
| Refrigerant weight | 0.41kg | 0.35kg | 0.60kg | 0.75kg | 0.90kg | 0.80kg | 0.70kg | 0.50kg | 0.75kg | 0.95kg |
| Plug Supplied | 10A | 10A | 10A | 15A | 25A | 25A | 10A | 25A | 25A | 32A |
| Features | | | | | | | | | | |
| Defrost Type | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic | Electronic |
| Type of Control | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital | Digital |
| Pre-wired For Internal Light | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Pre-wired For Heated Door Trim | | | | | | | ✓ | ✓ | ✓ | ✓ |
| No Drainage Required* | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Warranty | | | | | | | | | | |
| Parts (Years) | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |

* Drainage may be required in extreme ambient conditions or when storing high-water-content produce

** Low temperature rated at -20°C internal temperature, 30°C ambient temperature and medium temperature at 5°C and 30°C.